

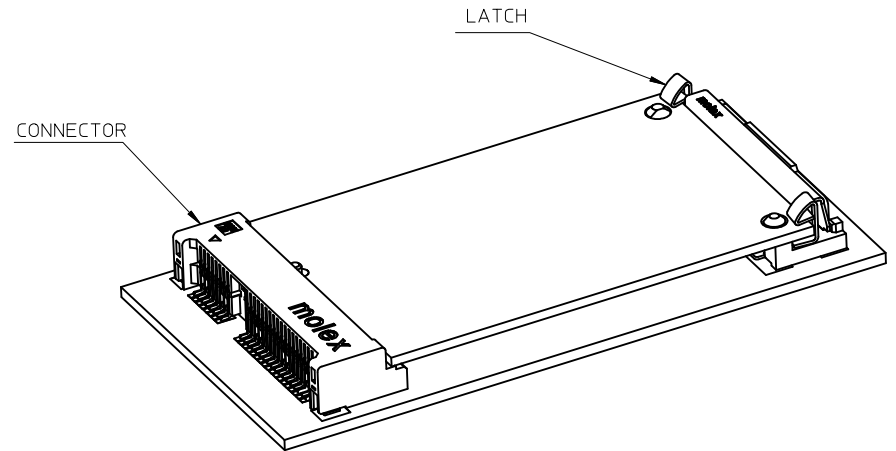


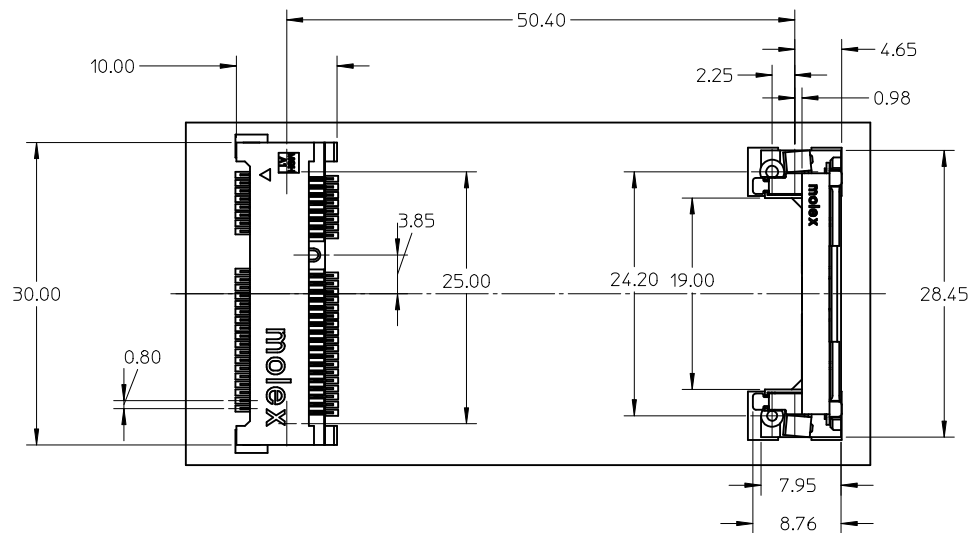

PUSH LATCH TO RELEASE MODULE






QUALITY SYMBOLS	
	=0
	=0

REV	DESCRIPTION	DATE	BY	APP
1	REVISED	2010/04/05	DAVID HU	DAVID HU
2	EC NO: S2010-0835	2010/04/05	DAVID HU	DAVID HU
3	DRWN: CWANG25	2010/04/05	DAVID HU	DAVID HU
4	CHKD: HARVEY	2010/04/05	DAVID HU	DAVID HU
5	APPR: NAGESHKN	2010/04/07	DAVID HU	DAVID HU
6	APPR: NAGESHKN	2010/04/07	DAVID HU	DAVID HU

QUALITY SYMBOLS	
	=0
	=0
	=0




GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES	± 0.25
3 PLACES	± 0.25
2 PLACES	± 0.25
1 PLACE	± 0.25
ANGULAR ± 3 °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DAVID HU
DATE	2010/11/10
CHECKED BY	HARVEY
DATE	2010/11/10
APPROVED BY	NAGESHKN
DATE	2010/04/07
MATERIAL NO.	480994000
SCALE	NTS
DESIGN UNITS	METRIC
THIRD ANGLE PROJECTION	
TITLE	LATCH FOR MINIPCI-E 4.0H 0.8MM PITCH 52 CIRCUIT WITH COVER LEAD-FREE
MOLEX INCORPORATED	
DOCUMENT NO.	SD-48099-400
SHEET NO.	1 OF 3

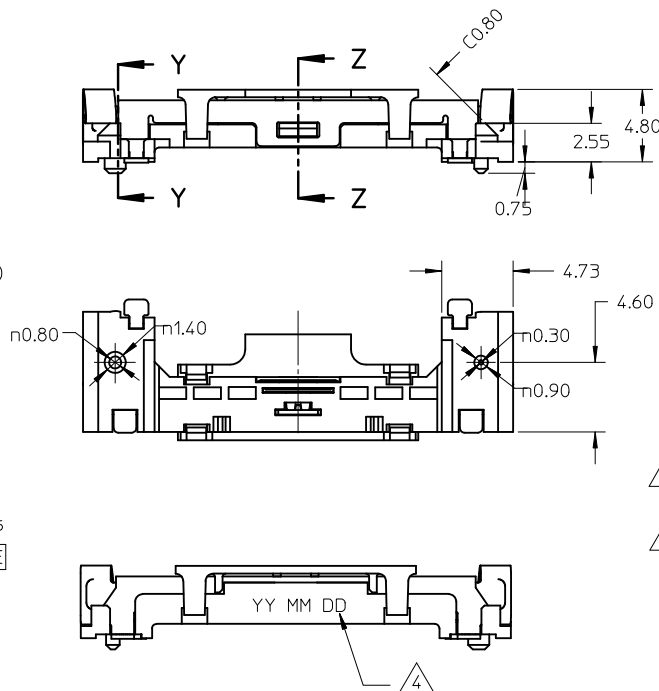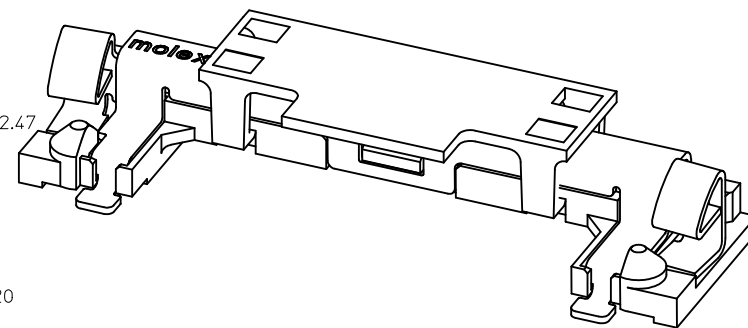

- NOTES:
1. THIS LATCH USES WITH MINIPCI EXPRESS CONN.
 2. HOUSING:PA46
GLASS FILLED,COLOR:BLACK UL94V-0
METAL SHELL:STAINLESS STEEL,THICKNESS:0.3MM
BEAM:STAINLESS STEEL,THICKNESS:0.3MM
 3. FINISH:GOLD FLASH PLATED IN SOLDER AREA.
 4. DATE CODE:YY:YEAR MM:MONTH DD:DATE
 5. THE MODULE CARD REFERS TO MINI PCI EXPRESS CARD
ELECTROMECHANICAL SPECIFICATION.
 6. FOR PICK AND PLACE AREA.
 7. MATCHED CONNECTOR:67910-0002,67910-1002
 8. DATUM D IS THE TOP SURFACE OF PCB.
 9. PART 48099**** COMPLIANT TO ROHS DIRECTIVE 2002/95/EC
AND ELV DIRECTIVE 2000/53/EC.

tb_frame_A3_P_AM_T
Rev. F 2009/06/18



DETAIL 3
Scale 5:1

DETAIL 4
Scale 5:1

fb_frame_A3_P_AM_T
Rev. F 2009/06/18