

TABLE 1				
LETTER CODE	CABLE DIAMETER RANGE (APPROX.)	CABLE TYPES	REFERENCE CABLE GROUP	
			TOOL CRIMP	WRENCH CRIMP
A	.070 / .110	RG-174, RG-178, RG-216, RG-179, H17/03-00001	-001 -003 -004	-5 -5A
I	.110 / .180	RG-180, AT&T 735A, BELDEN 8210, 141 SENT-R1610, 72C* BT-2003	-008 -009 -026	-4 -22 -65
B	.180 / .215	TCC-60-2, RG-59, RG-302, RG-303, H17/179-00001, THINNET (8007)	-011 -012	-1 -21
C	.180 / .230	RG-185, RG-141, RG-400, H17/110-2	-011 -012	-1 -1
D	.235 / .270	TCC-75-2(RG-59), RG-6, BELDEN 8212, AT&T 734A, RG-62	-013 -013A -019 -017 -025	-2 -63
U	.271 / .305	B281 PSF 1/2, AT&T 728 AND AT&T 724	-016	-6
UF	.271 / .305	B281-F (FLEXIBLE) & EQUIV.	-016	-6
E	.300 / .430	RG-8, RG-11, RG-213, RG-214 ETHERNET	—	-6A -6B

ITEM DESCRIPTION	PART NO		
	NORTH & SOUTH AMERICA	EUROPE	UNITED KINGDOM
AC POWER CONVERTER	ACC-NSA	ACC-EU	ACC-UK
AC CHARGER CORD FOR NI-CAD BATTERY	BCC-NSA	BCC-EU	BCC-UK
AUTO 12V DC CHARGER CORD FOR NI-CAD BATTERY	DCC	DCC	DCC
EXTRA NI-CAD BATTERY PACK WITH CHARGER	RBP-NSA	RBP-EU	RBP-UK

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO TROMPETER ELECTRONICS, INC. AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROSECUTION OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF TROMPETER ELECTRONICS, INC.

REVISIONS		010-0093	SH 1
REV	DESCRIPTION	DATE	APPROVED
G	REVISED PER ECD 16174	6/16/06	MCS

RED INDICATES ORIGINAL

SEE SPECIAL STRIPPING DIMENSIONS

- EACH ITEM MAY BE SOLD SEPARATELY
- EACH KIT IS SUPPLIED WITH A 12.5 X 9.5 X 5.4 CARRYING CASE AND USER INSTRUCTIONS

INDIVIDUAL BATTERY OR OPTIONAL POWER SOURCE MAY BE ORDERED AS SHOWN PER TABLE 2

- EXAMPLE OF COMPLETE MODEL NO.

BCS / C24T 3 A

CABLE RANGE LETTER CODE (SEE TABLE 1)

3 = 3-LEVEL FOR TOOL CRIMP
2 = 2-LEVEL FOR WRENCH CRIMP

CUTTER HEAD BASIC PART NO.

POWER STRIPPER TOOL:

BCS = NI-CAD BATTERY WITH AC & DC CHARGER FOR NORTH & SOUTH AMERICA

BCCS = NI-CAD BATTERY WITH AC & DC CHARGER AND RAPID CHARGER FOR NORTH & SOUTH AMERICA

BCS-EU = NI-CAD BATTERY WITH AC & DC CHARGER FOR EUROPE

BCS-UK = NI-CAD BATTERY WITH AC & DC CHARGER FOR UNITED KINGDOM



ACS = AC POWER CONVERTER FOR NORTH & SOUTH AMERICA

ACS-EU = AC POWER CONVERTER FOR EUROPE

ACS-UK = AC POWER CONVERTER FOR UNITED KINGDOM

- PORTABLE, HAND HELD, POWERED COAX CABLE STRIPPER KIT WITH AND WITHOUT CUTTER HEAD(S), WITH OPTIONAL POWER SOURCES, SEE TABLE 2

- ALL DIMENSIONS IN INCHES

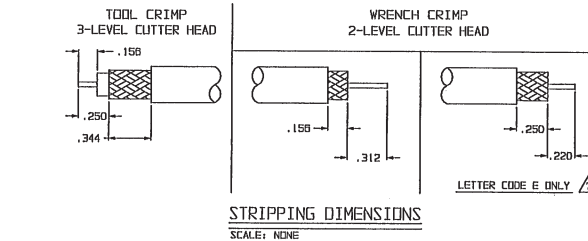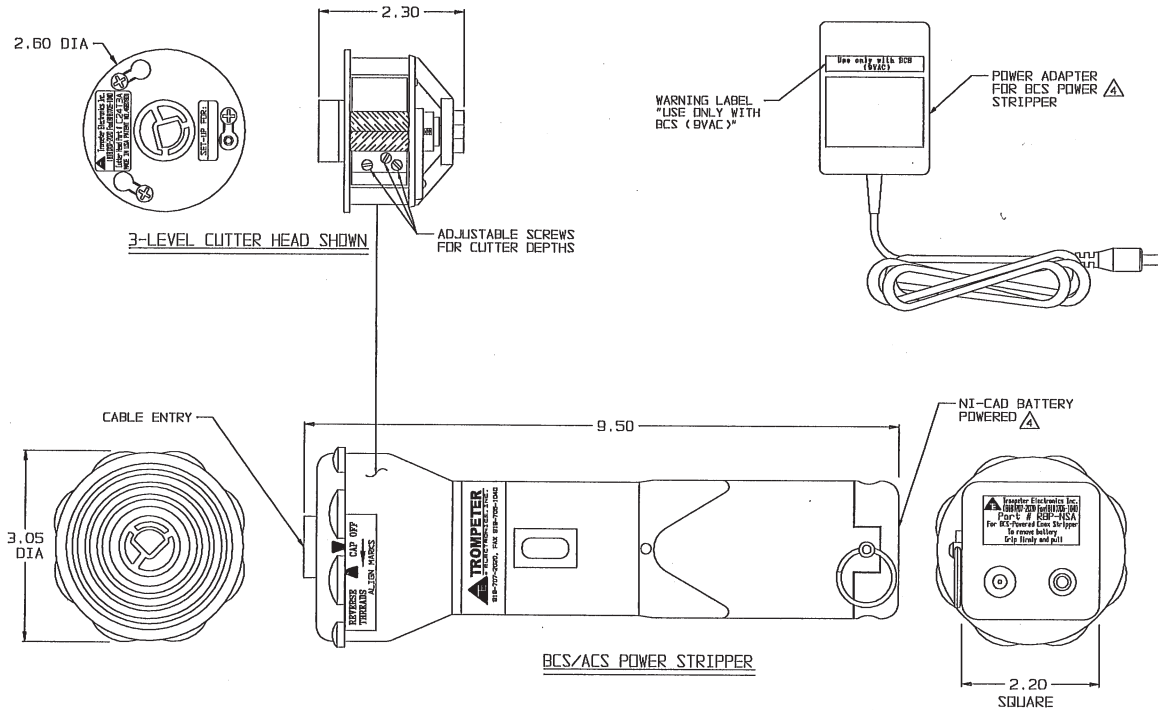

STRIPPING DIMENSIONS
SCALE: NONE

INTERPRET DRAWING PER ANSI Z39-18 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOL: UNLESS SPECIFIED .XX ± .05 .XXX ± .010 ANGLES FINISH: DO NOT SCALE DWG	
DRAWN L.M.	DATE 6-8-05	TROMPETER ELECTRONICS, INC.	
CHECKED C.M.	DATE 6/9/06		
APPROVED MCS	DATE 6/16/06	TITLE: BCS/ACS POWER STRIPPING TOOL	
CAD FILE NO. 010-0093G	SCALE N/A	SIZE A 14949	DRAWING NO. 010-0093
NEXT ASSY	DATE 10-18-93	REV. G	SHEET 1C