Features

- High Performance, Low Power Atmel® AVR® 8-Bit Microcontroller
- Advanced RISC Architecture
 - 130 Powerful Instructions Most Single Clock Cycle Execution
 - 32 x 8 General Purpose Working Registers
 - Fully Static Operation
 - Up to 16 MIPS Throughput at 16 MHz
 - On-Chip 2-cycle Multiplier
- High Endurance Non-volatile Memory segments
 - 16 Kbytes of In-System Self-programmable Flash program memory
 - 512 Bytes EEPROM
 - 1 Kbytes Internal SRAM
 - Write/Erase cycles: 10,000 Flash/100,000 EEPROM
 - Data retention: 20 years at 85°C/100 years at 25°C⁽¹⁾
 - Optional Boot Code Section with Independent Lock Bits In-System Programming by On-chip Boot Program
 - True Read-While-Write Operation

 Programming Lock for Software Security
- JTAG (IEEE std. 1149.1 compliant) Interface
 - Boundary-scan Capabilities According to the JTAG Standard
 - Extensive On-chip Debug Support
 - Programming of Flash, EEPROM, Fuses, and Lock Bits through the JTAG Interface
- Peripheral Features
 - 4 x 25 Segment LCD Driver
 - Two 8-bit Timer/Counters with Separate Prescaler and Compare Mode
 - One 16-bit Timer/Counter with Separate Prescaler, Compare Mode, and Capture Mode
 - Real Time Counter with Separate Oscillator
 - Four PWM Channels
 - 8-channel, 10-bit ADC
 - Programmable Serial USART
 - Master/Slave SPI Serial Interface
 - Universal Serial Interface with Start Condition Detector
 - Programmable Watchdog Timer with Separate On-chip Oscillator
 - On-chip Analog Comparator
 - Interrupt and Wake-up on Pin Change
- Special Microcontroller Features
 - Power-on Reset and Programmable Brown-out Detection
 - Internal Calibrated Oscillator
 - External and Internal Interrupt Sources
 - Five Sleep Modes: Idle, ADC Noise Reduction, Power-save, Power-down, and Standby
- I/O and Packages
 - 54 Programmable I/O Lines
 - 64-lead TQFP, 64-pad QFN/MLF and 64-pad DRQFN
- · Speed Grade:
 - ATmega169PV: 0 4 MHz @ 1.8V 5.5V, 0 8 MHz @ 2.7V 5.5V
 - ATmega169P: 0 8 MHz @ 2.7V 5.5V. 0 16 MHz @ 4.5V 5.5V
- Temperature range:
 - -40°C to 85°C Industrial
- Ultra-Low Power Consumption
 - Active Mode:
 - 1 MHz, 1.8V: 330 µA
 - 32 kHz, 1.8V: 10 µA (including Oscillator)
 - 32 kHz, 1.8V: 25 µA (including Oscillator and LCD)
 - Power-down Mode:
 - 0.1 uA at 1.8V
 - Power-save Mode:

0.6 µA at 1.8V (Including 32 kHz RTC)



8-bit AVR®
Microcontroller with 16K Bytes In-System
Programmable Flash

ATmega169P ATmega169PV

Preliminary


Summary



1. Pin Configurations

1.1 Pinout - TQFP/QFN/MLF

Figure 1-1. 64A (TQFP) and 64M1 (QFN/MLF) Pinout ATmega169P

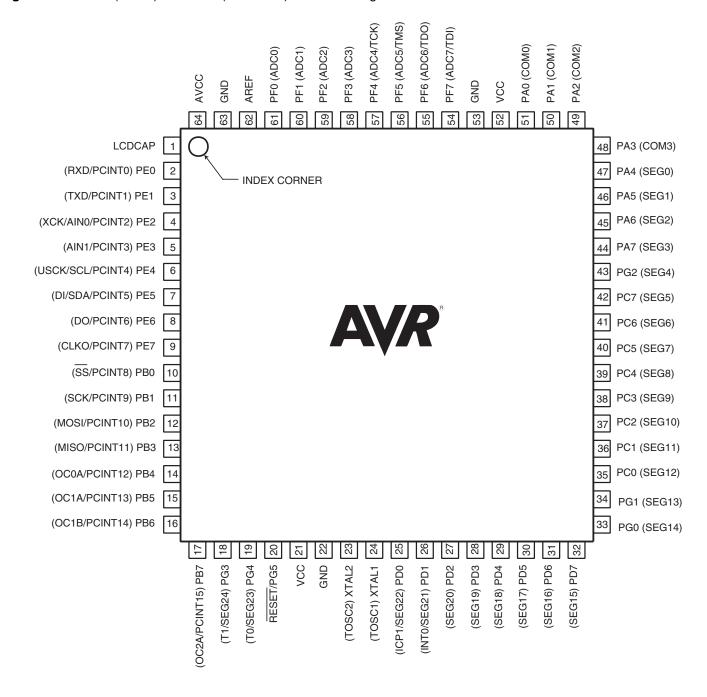

Note: The large center pad underneath the QFN/MLF packages is made of metal and internally connected to GND. It should be soldered or glued to the board to ensure good mechanical stability. If the center pad is left unconnected, the package might loosen from the board.



1.2 Pinout - DRQFN

Figure 1-2. 64MC (DRQFN) Pinout ATmega169P

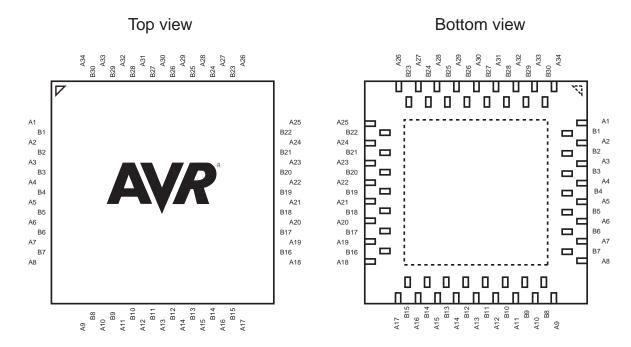


Table 1-1. DRQFN-64 Pinout ATmega169P.

			•				
A1	PE0	A9	PB7	A18	PG1 (SEG13)	A26	PA2 (COM2)
B1	VLCDCAP	B8	PB6	B16	PG0 (SEG14)	B23	PA3 (COM3)
A2	PE1	A10	PG3	A19	PC0 (SEG12)	A27	PA1 (COM1)
B2	PE2	В9	PG4	B17	PC1 (SEG11)	B24	PA0 (COM0)
A3	PE3	A11	RESET	A20	PC2 (SEG10)	A28	VCC
В3	PE4	B10	VCC	B18	PC3 (SEG9)	B25	GND
A4	PE5	A12	GND	A21	PC4 (SEG8)	A29	PF7
B4	PE6	B11	XTAL2 (TOSC2)	B19	PC5 (SEG7)	B26	PF6
A5	PE7	A13	XTAL1 (TOSC1)	A22	PC6 (SEG6)	A30	PF5
B5	PB0	B12	PD0 (SEG22)	B20	PC7 (SEG5)	B27	PF4
A6	PB1	A14	PD1 (SEG21)	A23	PG2 (SEG4)	A31	PF3
В6	PB2	B13	PD2 (SEG20)	B21	PA7 (SEG3)	B28	PF2
A7	PB3	A15	PD3 (SEG19)	A24	PA6 (SEG2)	A32	PF1
В7	PB5	B14	PD4 (SEG18)	B22	PA4 (SEG0)	B29	PF0
A8	PB4	A16	PD5 (SEG17)	A25	PA5 (SEG1)	A33	AREF
	•	B15	PD7 (SEG15)		1	B30	AVCC
		A17	PD6 (SEG16)			A34	GND




2. Overview

The ATmega169P is a low-power CMOS 8-bit microcontroller based on the AVR enhanced RISC architecture. By executing powerful instructions in a single clock cycle, the ATmega169P achieves throughputs approaching 1 MIPS per MHz allowing the system designer to optimize power consumption versus processing speed.

2.1 Block Diagram

Figure 2-1. Block Diagram

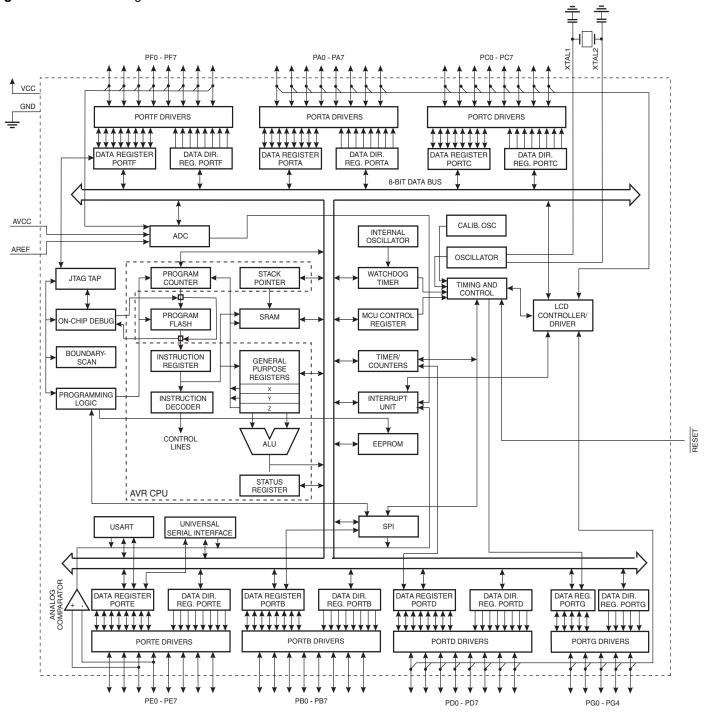



The AVR core combines a rich instruction set with 32 general purpose working registers. All the 32 registers are directly connected to the Arithmetic Logic Unit (ALU), allowing two independent registers to be accessed in one single instruction executed in one clock cycle. The resulting architecture is more code efficient while achieving throughputs up to ten times faster than conventional CISC microcontrollers.

The ATmega169P provides the following features: 16 Kbytes of In-System Programmable Flash with Read-While-Write capabilities, 512 bytes EEPROM, 1 Kbyte SRAM, 53 general purpose I/O lines, 32 general purpose working registers, a JTAG interface for Boundary-scan, On-chip Debugging support and programming, a complete On-chip LCD controller with internal step-up voltage, three flexible Timer/Counters with compare modes, internal and external interrupts, a serial programmable USART, Universal Serial Interface with Start Condition Detector, an 8channel, 10-bit ADC, a programmable Watchdog Timer with internal Oscillator, an SPI serial port, and five software selectable power saving modes. The Idle mode stops the CPU while allowing the SRAM, Timer/Counters, SPI port, and interrupt system to continue functioning. The Power-down mode saves the register contents but freezes the Oscillator, disabling all other chip functions until the next interrupt or hardware reset. In Power-save mode, the asynchronous timer and the LCD controller continues to run, allowing the user to maintain a timer base and operate the LCD display while the rest of the device is sleeping. The ADC Noise Reduction mode stops the CPU and all I/O modules except asynchronous timer, LCD controller and ADC, to minimize switching noise during ADC conversions. In Standby mode, the crystal/resonator Oscillator is running while the rest of the device is sleeping. This allows very fast start-up combined with low-power consumption.

The device is manufactured using Atmel's high density non-volatile memory technology. The On-chip ISP Flash allows the program memory to be reprogrammed In-System through an SPI serial interface, by a conventional non-volatile memory programmer, or by an On-chip Boot program running on the AVR core. The Boot program can use any interface to download the application program in the Application Flash memory. Software in the Boot Flash section will continue to run while the Application Flash section is updated, providing true Read-While-Write operation. By combining an 8-bit RISC CPU with In-System Self-Programmable Flash on a monolithic chip, the Atmel ATmega169P is a powerful microcontroller that provides a highly flexible and cost effective solution to many embedded control applications.

The ATmega169P AVR is supported with a full suite of program and system development tools including: C Compilers, Macro Assemblers, Program Debugger/Simulators, In-Circuit Emulators, and Evaluation kits.



2.2 Pin Descriptions

2.2.1 VCC

Digital supply voltage.

2.2.2 GND

Ground.

2.2.3 Port A (PA7:PA0)

Port A is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port A output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port A pins that are externally pulled low will source current if the pull-up resistors are activated. The Port A pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port A also serves the functions of various special features of the ATmega169P as listed on "Alternate Functions of Port A" on page 73.

2.2.4 Port B (PB7:PB0)

Port B is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port B output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port B pins that are externally pulled low will source current if the pull-up resistors are activated. The Port B pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port B has better driving capabilities than the other ports.

Port B also serves the functions of various special features of the ATmega169P as listed on "Alternate Functions of Port B" on page 74.

2.2.5 Port C (PC7:PC0)

Port C is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port C output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port C pins that are externally pulled low will source current if the pull-up resistors are activated. The Port C pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port C also serves the functions of special features of the ATmega169P as listed on "Alternate Functions of Port C" on page 77.

2.2.6 Port D (PD7:PD0)

Port D is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port D output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port D pins that are externally pulled low will source current if the pull-up resistors are activated. The Port D pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port D also serves the functions of various special features of the ATmega169P as listed on "Alternate Functions of Port D" on page 79.



2.2.7 Port E (PE7:PE0)

Port E is an 8-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port E output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port E pins that are externally pulled low will source current if the pull-up resistors are activated. The Port E pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port E also serves the functions of various special features of the ATmega169P as listed on "Alternate Functions of Port E" on page 81.

2.2.8 Port F (PF7:PF0)

Port F serves as the analog inputs to the A/D Converter.

Port F also serves as an 8-bit bi-directional I/O port, if the A/D Converter is not used. Port pins can provide internal pull-up resistors (selected for each bit). The Port F output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port F pins that are externally pulled low will source current if the pull-up resistors are activated. The Port F pins are tri-stated when a reset condition becomes active, even if the clock is not running. If the JTAG interface is enabled, the pull-up resistors on pins PF7(TDI), PF5(TMS), and PF4(TCK) will be activated even if a reset occurs.

Port F also serves the functions of the JTAG interface, see "Alternate Functions of Port F" on page 83.

2.2.9 Port G (PG5:PG0)

Port G is a 6-bit bi-directional I/O port with internal pull-up resistors (selected for each bit). The Port G output buffers have symmetrical drive characteristics with both high sink and source capability. As inputs, Port G pins that are externally pulled low will source current if the pull-up resistors are activated. The Port G pins are tri-stated when a reset condition becomes active, even if the clock is not running.

Port G also serves the functions of various special features of the ATmega169P as listed on page 85.

2.2.10 **RESET**

Reset input. A low level on this pin for longer than the minimum pulse length will generate a reset, even if the clock is not running. The minimum pulse length is given in Table 28-4 on page 333. Shorter pulses are not guaranteed to generate a reset.

2.2.11 XTAL1

Input to the inverting Oscillator amplifier and input to the internal clock operating circuit.

2.2.12 XTAL2

Output from the inverting Oscillator amplifier.

2.2.13 AVCC

AVCC is the supply voltage pin for Port F and the A/D Converter. It should be externally connected to V_{CC} , even if the ADC is not used. If the ADC is used, it should be connected to V_{CC} through a low-pass filter.



2.2.14 AREF

This is the analog reference pin for the A/D Converter.

2.2.15 LCDCAP

An external capacitor (typical > 470 nF) must be connected to the LCDCAP pin as shown in Figure 23-2 on page 236. This capacitor acts as a reservoir for LCD power (V_{LCD}). A large capacitance reduces ripple on V_{LCD} but increases the time until V_{LCD} reaches its target value.



3. Resources

A comprehensive set of development tools, application notes and datasheets are available for download on http://www.atmel.com/avr.

4. Data Retention

Reliability Qualification results show that the projected data retention failure rate is much less than 1 PPM over 20 years at 85°C or 100 years at 25°C.



5. Register Summary

Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0xFF)	Reserved	_	_	_	_	_	_	_	_	_
(0xFE)	LCDDR18	_	_	_	_	_	_	_	SEG324	250
(0xFD)	LCDDR17	SEG323	SEG322	SEG321	SEG320	SEG319	SEG318	SEG317	SEG316	250
(0xFC)	LCDDR16	SEG315	SEG314	SEG313	SEG312	SEG311	SEG310	SEG309	SEG308	250
(0xFB)	LCDDR15	SEG307	SEG306	SEG305	SEG304	SEG303	SEG302	SEG301	SEG300	250
(0xFA)	Reserved	_	-	-	-	_	-	-	-	
(0xF9)	LCDDR13	_	-	-	-	_	-	-	SEG224	250
(0xF8)	LCDDR12	SEG223	SEG222	SEG221	SEG220	SEG219	SEG218	SEG217	SEG216	250
(0xF7)	LCDDR11	SEG215	SEG214	SEG213	SEG212	SEG211	SEG210	SEG209	SEG208	250
(0xF6)	LCDDR10	SEG207	SEG206	SEG205	SEG204	SEG203	SEG202	SEG201	SEG200	250
(0xF5)	Reserved	-	-	-	-	-	-	-	-	
(0xF4)	LCDDR8	_	-	-	=	_	_	=	SEG124	250
(0xF3)	LCDDR7	SEG123	SEG122	SEG121	SEG120	SEG119	SEG118	SEG117	SEG116	250
(0xF2)	LCDDR6	SEG115	SEG114	SEG113	SEG112	SEG111	SEG110	SEG109	SEG108	250
(0xF1)	LCDDR5	SEG107	SEG106	SEG105	SEG104	SEG103	SEG102	SEG101	SEG100	250
(0xF0)	Reserved	_	-	-	_	_	_	-	-	
(0xEF)	LCDDR3	-	-	-	-	-	-	-	SEG024	250
(0xEE)	LCDDR2	SEG023	SEG022	SEG021	SEG020	SEG019	SEG018	SEG017	SEG016	250
(0xED)	LCDDR1	SEG015	SEG014	SEG013	SEG012	SEG011	SEG010	SEG09	SEG008	250
(0xEC)	LCDDR0	SEG007	SEG006	SEG005	SEG004	SEG003	SEG002	SEG001	SEG000	250
(0xEB)	Reserved	-	-	-	-	-	-	-	-	
(0xEA)	Reserved	-	=	=	-	-	-	-	-	
(0xE9)	Reserved	-	-	-	-	-	-	-	-	
(0xE8)	Reserved	-	=	=	-	-	-	-	-	
(0xE7)	LCDCCR	LCDDC2	LCDDC1	LCDDC0	LCDMDT	LCDCC3	LCDCC2	LCDCC1	LCDCC0	249
(0xE6)	LCDFRR	-	LCDPS2	LCDPS1	LCDPS0	-	LCDCD2	LCDCD1	LCDCD0	247
(0xE5)	LCDCRB	LCDCS	LCD2B	LCDMUX1	LCDMUX0	-	LCDPM2	LCDPM1	LCDPM0	246
(0xE4)	LCDCRA	LCDEN	LCDAB	-	LCDIF	LCDIE	LCDBD	LCDCCD	LCDBL	245
(0xE3)	Reserved	_	_	_	-	_	_	-	-	
(0xE2)	Reserved	-	-	-	-	-	-	-	-	
(0xE1)	Reserved	_	-	-	-	-	_	-	-	
(0xE0)	Reserved	_	_	_	_	_	_	_	-	
(0xDF)	Reserved	_	-	_	_	-	_	_	-	
(0xDE)	Reserved	_	-	_	_	-	_	-	-	
(0xDD)	Reserved	-	-	_	-	-	_	-	-	
(0xDC)	Reserved	_	-	=	-	_	_	-	-	
(0xDB)	Reserved	_	_	_	_	_	_	_	_	
(0xDA)	Reserved	-	_	_	-	-	-	_	_	
(0xD9)	Reserved					_				
(0xD8) (0xD7)	Reserved Reserved		_			_				
(0xD7)	Reserved									
(0xD6)	Reserved	_			_	_	_	_	_	
(0xD4)	Reserved	_	_	_	_	_	_	_	_	
(0xD3)	Reserved	_	_	_	_	_	_	_	_	
(0xD2)	Reserved	_	_	-	_	_	-	_	_	
(0xD1)	Reserved	_	_	_	_	_	_	_	_	
(0xD0)	Reserved	_	_	_	_	_	_	_	_	
(0xCF)	Reserved	_	-	-	_	-	_	-	_	
(0xCE)	Reserved	_	-	-	_	-	_	-	_	
(0xCD)	Reserved	_	-	-	_	-	_	-	_	
(0xCC)	Reserved	-	-	-	-	-	-	-	-	
(0xCB)	Reserved	_	-	-	_	_	-	-	_	
(0xCA)	Reserved	-	-	-	-	-	-	-	-	
(0xC9)	Reserved	-	-	-	-	-	-	-	-	
(0xC8)	Reserved	-	_	_	_	_	-	_	_	
(0xC7)	Reserved	-	-	-	-	-	-	-	-	
(0xC6)	UDR0				USART0 I/O	Data Register				190
(0xC5)	UBRRH0						USART0 Baud R	ate Register High		194
(0xC4)	UBRRL0				USART0 Baud F	Rate Register Low				194
(0xC3)	Reserved	-	=	=	-	-	-	-	-	
(0xC2)	UCSR0C	=	UMSEL0	UPM01	UPM00	USBS0	UCSZ01	UCSZ00	UCPOL0	190
(0xC1)	UCSR0B	RXCIE0	TXCIE0	UDRIE0	RXEN0	TXEN0	UCSZ02	RXB80	TXB80	190
(0xC0)	UCSR0A	RXC0	TXC0	UDRE0	FE0	DOR0	UPE0	U2X0	MPCM0	190



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0xBF)	Reserved	_	-	_	_	_	_	_	-	
(0xBE)	Reserved	_	_	_	_	-	_	-	-	
(0xBD)	Reserved	-	-	_	-	-	-	_	-	
(0xBC)	Reserved	-	-	-	-	-	-	-	-	
(0xBB)	Reserved	-	_	-	-	-	_	-	-	
(0xBA)	USIDR				USI Data	a Register				207
(0xB9)	USISR	USISIF	USIOIF	USIPF	USIDC	USICNT3	USICNT2	USICNT1	USICNT0	207
(0xB8)	USICR	USISIE	USIOIE	USIWM1	USIWM0	USICS1	USICS0	USICLK	USITC	208
(0xB7)	Reserved	-		-	-	-	-	_	-	
(0xB6)	ASSR	-	-	-	EXCLK	AS2	TCN2UB	OCR2UB	TCR2UB	156
(0xB5)	Reserved	-	-	-	-	-	_	-	-	
(0xB4)	Reserved	-	-	-	-	-	-	-	-	
(0xB3)	OCR2A		Timer/Counter2 Output Compare Register A							155
(0xB2)	TCNT2		Timer/Counter2 (8-bit)							155
(0xB1)	Reserved	-	-	-	-	-	_	-	-	
(0xB0)	TCCR2A	FOC2A	WGM20	COM2A1	COM2A0	WGM21	CS22	CS21	CS20	153
(0xAF)	Reserved	_	-	_	-	_	_	-	-	
(0xAE)	Reserved	-	-	-	-	-	-	-	-	
(0xAD)	Reserved	_	_	_	-	_	_	_	-	
(0xAC)	Reserved	_	_	_	-	_	_	-	-	
(0xAB)	Reserved	-	-	-	-	-	_	-	-	
(0xAA)	Reserved	-	_	-	-	_	-	-	-	
(0xA9)	Reserved	_	_	-	-	-	_	-	-	
(0xA8)	Reserved	-	-	-	-	-	_	-	-	
(0xA7)	Reserved	-	_	-	-	_	-	-	-	
(0xA6)	Reserved	_	_	-	-	_	_	-	-	
(0xA5)	Reserved Reserved	_	_	_	-		_	-	_	
(0xA4)								_	_	
(0xA3) (0xA2)	Reserved Reserved	_	_	_		_	_		_	
(0xA2)	Reserved			_				_		
(0xA1)	Reserved			_	_		_	_	_	
(0x9F)	Reserved		_	_			_	_	_	
(0x9E)	Reserved	_	_	_	_	_	_	_	_	
(0x9D)	Reserved	_	_	_	_	_	_	_	_	
(0x9C)	Reserved	_	_	_	_	_	_	_	_	
(0x9B)	Reserved	_	_	_	_	_	_	_	_	
(0x9A)	Reserved	_	_	_	_	_	_	_	_	
(0x99)	Reserved	_	_	_	_	_	_	_	_	
(0x98)	Reserved	_	_	_	_	_	_	_	_	
(0x97)	Reserved	_	_	_	_	_	_	_	_	
(0x96)	Reserved	_	-	_	_	_	_	-	-	
(0x95)	Reserved	-	-	_	_	-	_	-	-	
(0x94)	Reserved	_	-	_	_	_	_	-	-	
(0x93)	Reserved	-	-	-	-	-	-	-	-	
(0x92)	Reserved	-	-	-	-	-	-	_	-	
(0x91)	Reserved	-	-	_	-	-	-	_	-	
(0x90)	Reserved	_	_	_	-	_	_	_	-	
(0x8F)	Reserved	-	_	_	-	-	_	-	-	
(0x8E)	Reserved	-	_	_	-	-	-	_	-	
(0x8D)	Reserved	-	_	_	-	-	_	_	-	
(0x8C)	Reserved	-	-	-	-	-	-	-	-	
(0x8B)	OCR1BH			Timer/Co	ounter1 - Output Co	mpare Register B	High Byte			132
(0x8A)	OCR1BL			Timer/Co	ounter1 - Output Co	ompare Register B	Low Byte			132
(0x89)	OCR1AH			Timer/Co	ounter1 - Output Co	mpare Register A	High Byte			132
(0x88)	OCR1AL			Timer/Co	ounter1 - Output Co	ompare Register A	Low Byte			132
(0x87)	ICR1H			Timer/	Counter1 - Input C	apture Register Hi	gh Byte			133
(0x86)	ICR1L			Timer	/Counter1 - Input C	apture Register Lo	w Byte			133
(0x85)	TCNT1H			Tim	er/Counter1 - Cou	nter Register High	Byte			132
(0x84)	TCNT1L			Tim	ner/Counter1 - Cou	nter Register Low	Byte			132
(0x83)	Reserved	-	-	-	-	-	-	-	-	
(0x82)	TCCR1C	FOC1A	FOC1B	-	-	-	-	-	-	131
(0x81)	TCCR1B	ICNC1	ICES1	-	WGM13	WGM12	CS12	CS11	CS10	130
(0x80)	TCCR1A	COM1A1	COM1A0	COM1B1	COM1B0	-	-	WGM11	WGM10	128
(0x7F)	DIDR1	-	_	-	_	-	-	AIN1D	AIN0D	214
(0x7E)	DIDR0	ADC7D	ADC6D	ADC5D	ADC4D	ADC3D	ADC2D	ADC1D	ADC0D	232



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
(0x7D)	Reserved	_	=	_	_	-	=	=	-	
(0x7C)	ADMUX	REFS1	REFS0	ADLAR	MUX4	MUX3	MUX2	MUX1	MUX0	228
(0x7B)	ADCSRB	_	ACME	-	-	-	ADTS2	ADTS1	ADTS0	213, 232
(0x7A)	ADCSRA	ADEN	ADSC	ADATE	ADIF	ADIE	ADPS2	ADPS1	ADPS0	230
(0x79)	ADCH					gister High byte			1	231
(0x78)	ADCL					gister Low byte				231
(0x77)	Reserved	_	_	_	_	_	_	_	_	
(0x76)	Reserved	_	_	_	_	_	_	_	_	
(0x75)	Reserved	_	_	_	_	_	_	_	_	
(0x74)	Reserved	_	_	_	_	_	_	_	_	
(0x73)	Reserved	_	_	_	_	_	_	_	_	
(0x73) (0x72)	Reserved	_		_	_	_		_	_	
i i		_		_		_		_		
(0x71)	Reserved					_				450
(0x70)	TIMSK2	-		-	-	-	-	OCIE2A	TOIE2	156
(0x6F)	TIMSK1	-		ICIE1	-	-	OCIE1B	OCIE1A	TOIE1	133
(0x6E)	TIMSK0	_		-	-	-	_	OCIE0A	TOIE0	104
(0x6D)	Reserved	_		-	-	-		-	-	
(0x6C)	PCMSK1	PCINT15	PCINT14	PCINT13	PCINT12	PCINT11	PCINT10	PCINT9	PCINT8	63
(0x6B)	PCMSK0	PCINT7	PCINT6	PCINT5	PCINT4	PCINT3	PCINT2	PCINT1	PCINT0	64
(0x6A)	Reserved	-	-	-	-	-	-	-	-	
(0x69)	EICRA	-	-	-	-	-	-	ISC01	ISC00	62
(0x68)	Reserved	-	_	-	-	-	-	-	-	
(0x67)	Reserved	-	-	-	-	-	-	-	-	
(0x66)	OSCCAL				Oscillator Calil	oration Register				38
(0x65)	Reserved	_	_	_	-	-	-	-	-	
(0x64)	PRR	-	-	-	PRLCD	PRTIM1	PRSPI	PRUSART0	PRADC	45
(0x63)	Reserved	_	_	_	_	_	_	_	_	
(0x62)	Reserved	_	_	=	=	-	=	=	_	
(0x61)	CLKPR	CLKPCE	_	-	_	CLKPS3	CLKPS2	CLKPS1	CLKPS0	38
(0x60)	WDTCR	_	_	_	WDCE	WDE	WDP2	WDP1	WDP0	54
0x3F (0x5F)	SREG	ı	T	Н	S	V	N	Z	C	13
0x3E (0x5E)	SPH	_		_	_	_	SP10	SP9	SP8	15
0x3D (0x5D)	SPL	SP7	SP6	SP5	SP4	SP3	SP2	SP1	SP0	15
0x3C (0x5C)	Reserved	GI 7	0.0	0.0	01 4	0.0	01.2	OI I	0, 0	10
0x3B (0x5B)	Reserved									
· · ·	Reserved									
0x3A (0x5A)										
0x39 (0x59)	Reserved									
0x38 (0x58)	Reserved	ODME	DIAMACOD		DIAMAGE	DI DOET	DOWDT	DOEDO	ODMEN	000
0x37 (0x57)	SPMCSR	SPMIE	RWWSB	-	RWWSRE	BLBSET	PGWRT	PGERS	SPMEN	293
0x36 (0x56)	Reserved	-	_	-	-	-	_	-	-	
0x35 (0x55)	MCUCR	JTD		-	PUD	-		IVSEL	IVCE	60, 88, 278
0x34 (0x54)	MCUSR	-		-	JTRF	WDRF	BORF	EXTRF	PORF	278
0x33 (0x53)	SMCR	-	-	-	-	SM2	SM1	SM0	SE	45
0x32 (0x52)	Reserved	_	_	-	_	-	-	_	-	
0x31 (0x51)	OCDR	IDRD/OCDR7	OCDR6	OCDR5	OCDR4	OCDR3	OCDR2	OCDR1	OCDR0	257
0x30 (0x50)	ACSR	ACD	ACBG	ACO	ACI	ACIE	ACIC	ACIS1	ACIS0	213
0x2F (0x4F)	Reserved	-	-	_	_	_	_	_	_	ļ
0x2E (0x4E)	SPDR				SPI Data	a Register			T	167
0x2D (0x4D)	SPSR	SPIF	WCOL	-	-	-	-	-	SPI2X	166
0x2C (0x4C)	SPCR	SPIE	SPE	DORD	MSTR	CPOL	CPHA	SPR1	SPR0	165
0x2B (0x4B)	GPIOR2				General Purpos	se I/O Register 2				29
0x2A (0x4A)	GPIOR1				General Purpos	se I/O Register 1				29
0x29 (0x49)	Reserved	-	=	_		_	=	_	-	
0x28 (0x48)	Reserved	-	_	_	_	-	-	-	-	
0x27 (0x47)	OCR0A					ut Compare Regist				104
0x26 (0x46)	TCNT0	İ				inter0 (8 Bit)				104
0x25 (0x45)	Reserved	_	-	_	-	-	_	_	_	,
0x24 (0x44)	TCCR0A	FOC0A	WGM00	COM0A1	COM0A0	WGM01	CS02	CS01	CS00	102
0x23 (0x43)	GTCCR	TSM	- -	-	-	- WGW01	-	PSR2	PSR10	137, 157
· · · · · · · · · · · · · · · · · · ·	EEARH	1 SIVI		_				PSR2 -	EEAR8	
0x22 (0x42)		_	-	_				_	EEAK8	27
0x21 (0x41)	EEARL					Register Low Byte	;			27
0x20 (0x40)	EEDR					Data Register		I ==		27
	EECR	-	-	-	-	EERIE	EEMWE	EEWE	EERE	27
0x1F (0x3F)	0-:					on I//) Dogintor O				29
0x1E (0x3E)	GPIOR0	<u> 1</u>	<u></u>		General Purpos	_				
` '	GPIOR0 EIMSK EIFR	PCIE1 PCIF1	PCIE0 PCIF0	-	General Purpos		<u> </u>	<u> </u>	INT0 INTF0	62



Address	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Page
0x1B (0x3B)	Reserved	-	-	-	-	-	-	-	_	
0x1A (0x3A)	Reserved	-	-	-	-	-	_	-	-	
0x19 (0x39)	Reserved	-	-	-	-	-	-	-	-	
0x18 (0x38)	Reserved	-	-	-	-	-	-	-	-	
0x17 (0x37)	TIFR2	-	-	-	-	-	-	OCF2A	TOV2	156
0x16 (0x36)	TIFR1	-	-	ICF1	-	-	OCF1B	OCF1A	TOV1	134
0x15 (0x35)	TIFR0	-	-	-	-	-	-	OCF0A	TOV0	105
0x14 (0x34)	PORTG	-	-	PORTG5	PORTG4	PORTG3	PORTG2	PORTG1	PORTG0	90
0x13 (0x33)	DDRG	-	-	DDG5	DDG4	DDG3	DDG2	DDG1	DDG0	90
0x12 (0x32)	PING	-	-	PING5	PING4	PING3	PING2	PING1	PING0	90
0x11 (0x31)	PORTF	PORTF7	PORTF6	PORTF5	PORTF4	PORTF3	PORTF2	PORTF1	PORTF0	90
0x10 (0x30)	DDRF	DDF7	DDF6	DDF5	DDF4	DDF3	DDF2	DDF1	DDF0	90
0x0F (0x2F)	PINF	PINF7	PINF6	PINF5	PINF4	PINF3	PINF2	PINF1	PINF0	90
0x0E (0x2E)	PORTE	PORTE7	PORTE6	PORTE5	PORTE4	PORTE3	PORTE2	PORTE1	PORTE0	89
0x0D (0x2D)	DDRE	DDE7	DDE6	DDE5	DDE4	DDE3	DDE2	DDE1	DDE0	89
0x0C (0x2C)	PINE	PINE7	PINE6	PINE5	PINE4	PINE3	PINE2	PINE1	PINE0	90
0x0B (0x2B)	PORTD	PORTD7	PORTD6	PORTD5	PORTD4	PORTD3	PORTD2	PORTD1	PORTD0	89
0x0A (0x2A)	DDRD	DDD7	DDD6	DDD5	DDD4	DDD3	DDD2	DDD1	DDD0	89
0x09 (0x29)	PIND	PIND7	PIND6	PIND5	PIND4	PIND3	PIND2	PIND1	PIND0	89
0x08 (0x28)	PORTC	PORTC7	PORTC6	PORTC5	PORTC4	PORTC3	PORTC2	PORTC1	PORTC0	89
0x07 (0x27)	DDRC	DDC7	DDC6	DDC5	DDC4	DDC3	DDC2	DDC1	DDC0	89
0x06 (0x26)	PINC	PINC7	PINC6	PINC5	PINC4	PINC3	PINC2	PINC1	PINC0	89
0x05 (0x25)	PORTB	PORTB7	PORTB6	PORTB5	PORTB4	PORTB3	PORTB2	PORTB1	PORTB0	88
0x04 (0x24)	DDRB	DDB7	DDB6	DDB5	DDB4	DDB3	DDB2	DDB1	DDB0	88
0x03 (0x23)	PINB	PINB7	PINB6	PINB5	PINB4	PINB3	PINB2	PINB1	PINB0	88
0x02 (0x22)	PORTA	PORTA7	PORTA6	PORTA5	PORTA4	PORTA3	PORTA2	PORTA1	PORTA0	88
0x01 (0x21)	DDRA	DDA7	DDA6	DDA5	DDA4	DDA3	DDA2	DDA1	DDA0	88
0x00 (0x20)	PINA	PINA7	PINA6	PINA5	PINA4	PINA3	PINA2	PINA1	PINA0	88

Note:

- 1. For compatibility with future devices, reserved bits should be written to zero if accessed. Reserved I/O memory addresses should never be written.
- 2. I/O Registers within the address range 0x00 0x1F are directly bit-accessible using the SBI and CBI instructions. In these registers, the value of single bits can be checked by using the SBIS and SBIC instructions.
- 3. Some of the Status Flags are cleared by writing a logical one to them. Note that, unlike most other AVRs, the CBI and SBI instructions will only operate on the specified bit, and can therefore be used on registers containing such Status Flags. The CBI and SBI instructions work with registers 0x00 to 0x1F only.
- 4. When using the I/O specific commands IN and OUT, the I/O addresses 0x00 0x3F must be used. When addressing I/O Registers as data space using LD and ST instructions, 0x20 must be added to these addresses. The ATmega169P is a complex microcontroller with more peripheral units than can be supported within the 64 location reserved in Opcode for the IN and OUT instructions. For the Extended I/O space from 0x60 0xFF in SRAM, only the ST/STS/STD and LD/LDS/LDD instructions can be used.



6. Instruction Set Summary

Mnemonics	Operands	Description	Operation	Flags	#Clocks
ARITHMETIC AND L	OGIC INSTRUCTIONS		·		
ADD	Rd, Rr	Add two Registers	$Rd \leftarrow Rd + Rr$	Z,C,N,V,H	1
ADC	Rd, Rr	Add with Carry two Registers	$Rd \leftarrow Rd + Rr + C$	Z,C,N,V,H	1
ADIW	Rdl,K	Add Immediate to Word	Rdh:Rdl ← Rdh:Rdl + K	Z,C,N,V,S	2
SUB	Rd, Rr	Subtract two Registers	Rd ← Rd - Rr	Z,C,N,V,H	1
SUBI	Rd, K	Subtract Constant from Register	Rd ← Rd - K	Z,C,N,V,H	1
SBC	Rd, Rr	Subtract with Carry two Registers	$Rd \leftarrow Rd - Rr - C$	Z,C,N,V,H	1
SBCI	Rd, K	Subtract with Carry Constant from Reg.	$Rd \leftarrow Rd - K - C$	Z,C,N,V,H	1
SBIW	Rdl,K	Subtract Immediate from Word	Rdh:Rdl ← Rdh:Rdl - K	Z,C,N,V,S	2
AND	Rd, Rr	Logical AND Registers	$Rd \leftarrow Rd \bullet Rr$	Z,N,V	1
ANDI	Rd, K	Logical AND Register and Constant	$Rd \leftarrow Rd \bullet K$	Z,N,V	1
OR	Rd, Rr	Logical OR Registers	$Rd \leftarrow Rd v Rr$	Z,N,V	1
ORI	Rd, K	Logical OR Register and Constant	$Rd \leftarrow Rd \vee K$	Z,N,V	1
EOR	Rd, Rr	Exclusive OR Registers	$Rd \leftarrow Rd \oplus Rr$	Z,N,V	1
COM	Rd	One's Complement	$Rd \leftarrow 0xFF - Rd$	Z,C,N,V	1
NEG	Rd	Two's Complement	$Rd \leftarrow 0x00 - Rd$	Z,C,N,V,H	1
SBR	Rd,K	Set Bit(s) in Register	$Rd \leftarrow Rd v K$	Z,N,V	1
CBR	Rd,K	Clear Bit(s) in Register	$Rd \leftarrow Rd \bullet (0xFF - K)$	Z,N,V	1
INC	Rd	Increment	Rd ← Rd + 1	Z,N,V	1
DEC	Rd	Decrement	Rd ← Rd – 1	Z,N,V	1
TST	Rd	Test for Zero or Minus	$Rd \leftarrow Rd \bullet Rd$	Z,N,V	1
CLR	Rd	Clear Register	$Rd \leftarrow Rd \oplus Rd$	Z,N,V	1
SER	Rd	Set Register	$Rd \leftarrow 0xFF$	None	1
MUL	Rd, Rr	Multiply Unsigned	$R1:R0 \leftarrow Rd \times Rr$	Z,C	2
MULS	Rd, Rr	Multiply Signed	$R1:R0 \leftarrow Rd \times Rr$	Z,C	2
MULSU	Rd, Rr	Multiply Signed with Unsigned	$R1:R0 \leftarrow Rd \times Rr$	Z,C	2
FMUL	Rd, Rr	Fractional Multiply Unsigned	$R1:R0 \leftarrow (Rd \times Rr) << 1$	Z,C	2
FMULS	Rd, Rr	Fractional Multiply Signed	$R1:R0 \leftarrow (Rd \times Rr) << 1$	Z,C	2
FMULSU	Rd, Rr	Fractional Multiply Signed with Unsigned	$R1:R0 \leftarrow (Rd \times Rr) << 1$	Z,C	2
BRANCH INSTRUC			T	T	_
RJMP	k	Relative Jump	PC ← PC + k + 1	None	2
IJMP		Indirect Jump to (Z)	PC ← Z	None	2
JMP	k	Direct Jump	PC ← k	None	3
RCALL	k	Relative Subroutine Call	PC ← PC + k + 1	None	3
ICALL		Indirect Call to (Z)	PC ← Z	None	3
CALL	k	Direct Subroutine Call	PC ← k	None	4
RET RETI		Subroutine Return	PC ← STACK	None	4
	5.15	Interrupt Return	PC ← STACK	1	4
CPSE	Rd,Rr	Compare, Skip if Equal	if (Rd = Rr) PC ← PC + 2 or 3	None	1/2/3
CPSE CP	Rd,Rr	Compare, Skip if Equal Compare	if (Rd = Rr) PC ← PC + 2 or 3 Rd – Rr	Z, N,V,C,H	1/2/3 1
CPSE CP CPC	Rd,Rr Rd,Rr	Compare, Skip if Equal Compare Compare with Carry	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C	Z, N,V,C,H Z, N,V,C,H	1/2/3 1 1
CPSE CP CPC CPI	Rd,Rr Rd,Rr Rd,K	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H	1/2/3 1 1 1
CPSE CP CPC CPI SBRC	Rd,Rr Rd,Rr Rd,K Rr, b	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None	1/2/3 1 1 1 1 1/2/3
CPSE CP CPC CPI SBRC SBRS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set	if $(Rd = Rr) PC \leftarrow PC + 2 \text{ or } 3$ Rd - Rr Rd - Rr - C Rd - K if $(Rr(b)=0) PC \leftarrow PC + 2 \text{ or } 3$ if $(Rr(b)=1) PC \leftarrow PC + 2 \text{ or } 3$	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None	1/2/3 1 1 1 1 1/2/3 1/2/3
CPSE CP CPC CPI SBRC SBRS SBIC	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared	if $(Rd = Rr) PC \leftarrow PC + 2 \text{ or } 3$ Rd - Rr Rd - Rr - C Rd - K if $(Rr(b)=0) PC \leftarrow PC + 2 \text{ or } 3$ if $(Rr(b)=1) PC \leftarrow PC + 2 \text{ or } 3$ if $(P(b)=0) PC \leftarrow PC + 2 \text{ or } 3$	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3
CPSE CP CPC CPI SBRC SBRS SBIC SBIS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Set	if $(Rd = Rr) PC \leftarrow PC + 2 \text{ or } 3$ Rd - Rr Rd - Rr - C Rd - K if $(Rr(b)=0) PC \leftarrow PC + 2 \text{ or } 3$ if $(Rr(b)=1) PC \leftarrow PC + 2 \text{ or } 3$ if $(P(b)=0) PC \leftarrow PC + 2 \text{ or } 3$ if $(P(b)=0) PC \leftarrow PC + 2 \text{ or } 3$ if $(P(b)=1) PC \leftarrow PC + 2 \text{ or } 3$	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Set Branch if Status Flag Set	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC←PC+k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Set Branch if Status Flag Set Branch if Status Flag Cleared	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC←PC+k + 1 if (SREG(s) = 0) then PC←PC+k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBC BRBC BREQ	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBC BRBC BREQ BRNE	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Not Equal	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k + 1 if (SREG(s) = 0) then PC ← PC+k + 1 if (Z = 1) then PC ← PC + k + 1 if (Z = 0) then PC ← PC + k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBC BREQ BRNE BRCS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Not Equal Branch if Carry Set	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 1) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBC BREQ BRNE BRCC BRCC	Rd,Rr Rd,Kr Rd,K Rr, b Rr, b P, b P, b s, k s, k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Status Flag Cleared Branch if Not Equal Branch if Carry Set Branch if Carry Set	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC←PC+k + 1 if (SREG(s) = 0) then PC←PC+k + 1 if (Z = 1) then PC ← PC + k + 1 if (Z = 0) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BRBC BREQ BRNE BRCC BRCC BRSH	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b S, k S, k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Set Branch if Carry Cleared Branch if Carry Cleared	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC←PC+k + 1 if (SREG(s) = 0) then PC←PC+k + 1 if (Z = 0) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBS BRBC BREQ BRIE BRCC BRSH BRCC BRSH	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if Lower	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k + 1 if (Z = 0) then PC ← PC+k + 1 if (Z = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREC BREQ BRNE BRCC BRSH BRCC BRSH BRCC BRSH BRCC BRSH BRCC BRSH	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k s, k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Otary Set Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if Lower Branch if Minus	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k + 1 if (SREG(s) = 0) then PC ← PC+k + 1 if (Z = 0) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 0) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1 if (C = 1) then PC ← PC + k + 1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREC BREQ BRCA BRCA BRCA BRCA BRCA BRCA BRCA BRCA	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Not Equal Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if Lower Branch if Minus Branch if Plus	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 0) then PC ← PC + k+1 if (C = 1) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 1) then PC ← PC + k+1 if (C = 1) then PC ← PC + k+1 if (N = 1) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREC BREQ BRNE BRCC BRNE BRCC BRNE BRCC BRNE BRCC BRSH BRCC BRSH BRCC BRSH BRCC BRSH BRLO BRMI BRPL BRGE	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Cleared Branch if Carry Cleared Branch if Same or Higher Branch if Lower Branch if Minus Branch if Plus Branch if Greater or Equal, Signed	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (N = 1) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREC BREQ BRNE BRCC BRSH BRCC BRSH BRLO BRMI BRPL BRGE BRCT	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Status Flag Cleared Branch if Not Equal Branch if Carry Set Branch if Carry Cleared Branch if Carry Cleared Branch if Same or Higher Branch if Hower Branch if Lower Branch if Minus Branch if Greater or Equal, Signed Branch if Greater Than Zero, Signed	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (N = 1) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N ⊕ V = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREQ BRNE BRCC BRSH BRCC BRSH BRLO BRMI BRLO BRMI BRPL BRGE BRLT BRHS	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if I Lower Branch if I Lower Branch if Minus Branch if Greater or Equal, Signed Branch if Less Than Zero, Signed Branch if Half Carry Flag Set	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREQ BRNE BRCC BRNE BRCC BRSH BRIC BRCL BRCL BRCL BRCL BRCL BRCL BRCL BRC	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k k k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if Lower Branch if I Lower Branch if Minus Branch if Greater or Equal, Signed Branch if Less Than Zero, Signed Branch if Half Carry Flag Set Branch if Half Carry Flag Cleared	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=0) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 1) then PC ← PC + k+1 if (N = 1) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2
CPSE CP CPC CPC CPI SBRC SBRS SBIC SBIS BRBS BRBC BREC BREC BREC BRIC BRIC BRIC BRIC BRIC BRIC BRIC BRI	Rd,Rr Rd,Rr Rd,K Rr, b Rr, b P, b P, b s, k k k k k k k k k k k k	Compare, Skip if Equal Compare Compare with Carry Compare Register with Immediate Skip if Bit in Register Cleared Skip if Bit in Register is Set Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register Cleared Skip if Bit in I/O Register is Set Branch if Status Flag Set Branch if Status Flag Cleared Branch if Equal Branch if Carry Set Branch if Carry Set Branch if Carry Cleared Branch if Same or Higher Branch if I Lower Branch if I Lower Branch if Minus Branch if Greater or Equal, Signed Branch if Less Than Zero, Signed Branch if Half Carry Flag Set	if (Rd = Rr) PC ← PC + 2 or 3 Rd − Rr Rd − Rr − C Rd − K if (Rr(b)=0) PC ← PC + 2 or 3 if (Rr(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (P(b)=1) PC ← PC + 2 or 3 if (SREG(s) = 1) then PC ← PC+k+1 if (SREG(s) = 0) then PC ← PC+k+1 if (Z = 1) then PC ← PC + k+1 if (Z = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (C = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1 if (N = 0) then PC ← PC + k+1	Z, N,V,C,H Z, N,V,C,H Z, N,V,C,H None None None None None None None None	1/2/3 1 1 1 1 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2/3 1/2 1/2



Mnemonics	Operands	Description	Operation	Flags	#Clocks
BRVC	k	Branch if Overflow Flag is Cleared	if (V = 0) then PC ← PC + k + 1	None	1/2
BRIE	k	Branch if Interrupt Enabled	if (I = 1) then PC ← PC + k + 1	None	1/2
BRID	k	Branch if Interrupt Disabled	if (I = 0) then PC ← PC + k + 1	None	1/2
BIT AND BIT-TEST	INSTRUCTIONS				
SBI	P,b	Set Bit in I/O Register	I/O(P,b) ← 1	None	2
CBI	P,b	Clear Bit in I/O Register	I/O(P,b) ← 0	None	2
LSL	Rd	Logical Shift Left	$Rd(n+1) \leftarrow Rd(n), Rd(0) \leftarrow 0$	Z,C,N,V	1
LSR	Rd	Logical Shift Right	$Rd(n) \leftarrow Rd(n+1), Rd(7) \leftarrow 0$	Z,C,N,V	1
ROL	Rd	Rotate Left Through Carry	$Rd(0)\leftarrow C,Rd(n+1)\leftarrow Rd(n),C\leftarrow Rd(7)$	Z,C,N,V	1
ROR	Rd	Rotate Right Through Carry	$Rd(7)\leftarrow C,Rd(n)\leftarrow Rd(n+1),C\leftarrow Rd(0)$	Z,C,N,V	1
ASR	Rd	Arithmetic Shift Right	$Rd(n) \leftarrow Rd(n+1), n=06$	Z,C,N,V	1
SWAP	Rd	Swap Nibbles	$Rd(30) \leftarrow Rd(74), Rd(74) \leftarrow Rd(30)$	None	1
BSET	S	Flag Set	SREG(s) ← 1	SREG(s)	1
BCLR	s	Flag Clear	$SREG(s) \leftarrow 0$	SREG(s)	1
BST	Rr, b	Bit Store from Register to T	$T \leftarrow Rr(b)$	T	1
BLD	Rd, b	Bit load from T to Register	$Rd(b) \leftarrow T$	None	1
SEC		Set Carry	C ← 1	С	1
CLC		Clear Carry	C ← 0	С	1
SEN		Set Negative Flag	N ← 1	N	1
CLN		Clear Negative Flag	N ← 0	N	1
SEZ		Set Zero Flag	Z←1	Z	1
CLZ		Clear Zero Flag	Z ← 0	Z	1
SEI		Global Interrupt Enable	1←1	1	1
CLI		Global Interrupt Disable	1 ← 0	1	1
SES		Set Signed Test Flag	S ← 1	S	1
CLS		Clear Signed Test Flag	S ← 0	S	1
SEV		Set Twos Complement Overflow.	V ← 1	V	1
CLV		Clear Twos Complement Overflow	V ← 0	V	1
SET		Set T in SREG	T ← 1	Т	1
CLT		Clear T in SREG	T ← 0	Т	1
SEH		Set Half Carry Flag in SREG	H ← 1	H	1
CLH		Clear Half Carry Flag in SREG	H ← 0	Н	1
DATA TRANSFER		1	T	1	1 .
MOV	Rd, Rr	Move Between Registers	Rd ← Rr	None	1
MOVW	Rd, Rr	Copy Register Word	Rd+1:Rd ← Rr+1:Rr	None	1
LDI	Rd, K	Load Immediate	Rd ← K	None	1
			$Rd \leftarrow (X)$		2
LD	Rd, X	Load Indirect		None	
LD	Rd, X+	Load Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$	None	2
LD LD	Rd, X+ Rd, - X	Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$	None None	2
LD LD LD	Rd, X+ Rd, - X Rd, Y	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$	None None None	2 2
LD LD LD LD	Rd, X+ Rd, - X Rd, Y Rd, Y+	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$	None None None	2 2 2
LD LD LD LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$	None None None None None	2 2 2 2
LD LD LD LD LD LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$	None None None None None None None	2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, - Y Rd, Y+q Rd, Z	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, - Y Rd, Y+q Rd, Z Rd, Z+	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$	None None None None None None None None	2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect from SRAM	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (K)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM Store Indirect	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD ST	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, X+q Rd, k X, Rr X+, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X +$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, Z+ Rd, Z- Rd, Z+ Rd, -Z Rd, X+q Rd, K X, Rr X+, Rr - X, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD L	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd,Y+q Rd, Z Rd, Z+ Rd, Z- Rd, Z+ Rd, -Z Rd, X+q Rd, K X, Rr X+, Rr - X, Rr Y, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD LS ST ST ST ST	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+ Rd, -Z Rd, Z+q Rd, K X, Rr X+, Rr - X, Rr Y+, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD LD LD LD LD LD LD LD LD S S S S S S S	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z+ Rd, Z+ Rd, -Z Rd, Z+q Rd, Z+q Rd, X+q Rd, K X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD LD LD LD LD LD LD LD LD ST ST ST ST ST STD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, -Z Rd, X+q Rd, K X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Y + q)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (Z + q)$ $Rd \leftarrow (X + q$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q, Rr Z, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd \leftarrow $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr -X, Rr Y+, Rr -Y, Rr Y+q, Rr Z+, Rr Z+, Rr Z+, Rr Z+, Rr Z+, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd \leftarrow $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr Z+, Rr Z-, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd \leftarrow $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z+q, Rr Z+q,Rr Z+q,Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (K) \\ (X) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y + q) \leftarrow Rr \\ (Z) \leftarrow Rr \\ (Z + q) \leftarrow Rr \\$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+, Rr Z+, Rr Z-, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM Store Indirect from SRAM Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Rd \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z+q,Rr Z+q,Rr Z+q,Rr k, Rr Z+q,Rr k, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Pre-Dec.	$Rd \leftarrow (X), X \leftarrow X + 1$ $X \leftarrow X - 1, Rd \leftarrow (X)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y)$ $Rd \leftarrow (Y), Y \leftarrow Y + 1$ $Y \leftarrow Y - 1, Rd \leftarrow (Y)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, Rd \leftarrow (Z)$ $Rd \leftarrow (Z), Z \leftarrow Z + 1$ $Z \leftarrow Z - 1, (Z) \leftarrow Rr$ $(Z) \leftarrow Rr$ $(Z + q) \leftarrow Rr$ $(R) \leftarrow (Z)$	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+q,Rr Z+q,Rr k, Rr Rd, Z	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect Stor	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (K) \\ (X) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y + q) \leftarrow Rr \\ (Z) \leftarrow Rr $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z+q,Rr Z+q,Rr Z+q,Rr k, Rr Z+q,Rr k, Rr	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect and Pre-Dec. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect with Displacement Store Indirect and Post-Inc. Store Indirect and Pre-Dec.	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (X + q) \\ Rd \leftarrow $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
LD	Rd, X+ Rd, - X Rd, Y Rd, Y+ Rd, - Y Rd, Y+ Rd, - Y Rd, Y+q Rd, Z Rd, Z+ Rd, -Z Rd, Z+q Rd, k X, Rr X+, Rr - X, Rr Y+, Rr - Y, Rr Y+q,Rr Z, Rr Z+, Rr Z+q,Rr Z+q,Rr k, Rr Rd, Z	Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect and Pre-Dec. Load Indirect and Post-Inc. Load Indirect and Pre-Dec. Load Indirect with Displacement Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect and Post-Inc. Load Indirect with Displacement Load Direct from SRAM Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Post-Inc. Store Indirect and Pre-Dec. Store Indirect Stor	$ \begin{array}{c} Rd \leftarrow (X), X \leftarrow X + 1 \\ X \leftarrow X - 1, Rd \leftarrow (X) \\ Rd \leftarrow (Y) \\ Rd \leftarrow (Y), Y \leftarrow Y + 1 \\ Y \leftarrow Y - 1, Rd \leftarrow (Y) \\ Rd \leftarrow (Y + q) \\ Rd \leftarrow (Z), Z \leftarrow Z + 1 \\ Z \leftarrow Z - 1, Rd \leftarrow (Z) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (Z + q) \\ Rd \leftarrow (K) \\ (X) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y) \leftarrow Rr \\ (Y + q) \leftarrow Rr \\ (Z) \leftarrow Rr $	None None None None None None None None	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2



Mnemonics	Operands	Description	Operation	Flags	#Clocks				
PUSH	Rr	Push Register on Stack	STACK ← Rr	None	2				
POP	Rd	Pop Register from Stack	Rd ← STACK	None	2				
MCU CONTROL INSTRUCTIONS									
NOP		No Operation		None	1				
SLEEP		Sleep	(see specific descr. for Sleep function)	None	1				
WDR		Watchdog Reset	(see specific descr. for WDR/timer)	None	1				
BREAK		Break	For On-chip Debug Only	None	N/A				



Ordering Information

Speed (MHz) ⁽³⁾	Power Supply	Ordering Code	Package ⁽¹⁾⁽²⁾	Operation Range
8		ATmega169PV-8AU	64A	la distantial
	1.8V - 5.5V	ATmega169PV-8MU	64M1	Industrial (-40°C to 85°C)
		ATmega169PV-8MCH	64MC	(-40 6 10 03 6)
		ATmega169P-16AU	64A	la de deial
16	2.7V - 5.5V	ATmega169P-16MU	64M1	Industrial (-40°C to 85°C)
		ATmega169P-16MCH	64MC	(-40 8 10 03 8)


- Notes: 1. This device can also be supplied in wafer form. Please contact your local Atmel sales office for detailed ordering information and minimum quantities.
 - 2. Pb-free packaging, complies to the European Directive for Restriction of Hazardous Substances (RoHS directive). Also Halide free and fully Green.
 - 3. For Speed vs. $\rm V_{\rm CC}$, see Figure 28-1 on page 331 and Figure 28-2 on page 332.

Package Type						
64A	64-Lead, Thin (1.0 mm) Plastic Gull Wing Quad Flat Package (TQFP)					
64M1	64-pad, 9 x 9 x 1.0 mm body, lead pitch 0.50 mm, Quad Flat No-Lead/Micro Lead Frame Package (QFN/MLF)					
64MC	64-lead (2-row Staggered), 7 x 7 x 1.0 mm body, 4.0 x 4.0 mm Exposed Pad, Quad Flat No-Lead Package (QFN)					



8. Packaging Information

8.1 64A

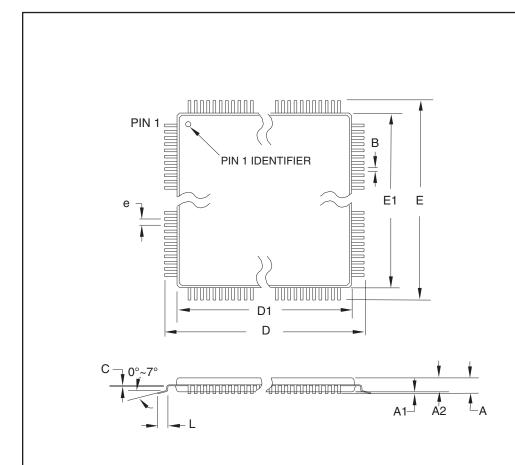

COMMON DIMENSIONS (Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	-	-	1.20	
A1	0.05	-	0.15	
A2	0.95	1.00	1.05	
D	15.75	16.00	16.25	
D1	13.90	14.00	14.10	Note 2
Е	15.75	16.00	16.25	
E1	13.90	14.00	14.10	Note 2
В	0.30	_	0.45	
С	0.09	-	0.20	
L	0.45	_	0.75	
е		0.80 TYP		

10/5/2001

Notes:

- 1. This package conforms to JEDEC reference MS-026, Variation AEB.
- Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is 0.25 mm per side. Dimensions D1 and E1 are maximum plastic body size dimensions including mold mismatch.
- 3. Lead coplanarity is 0.10 mm maximum.


TITLE

64A, 64-lead, 14 x 14 mm Body Size, 1.0 mm Body Thickness, 0.8 mm Lead Pitch, Thin Profile Plastic Quad Flat Package (TQFP)


DRAWING NO.	REV.	
64A	В	





8.2 64M1

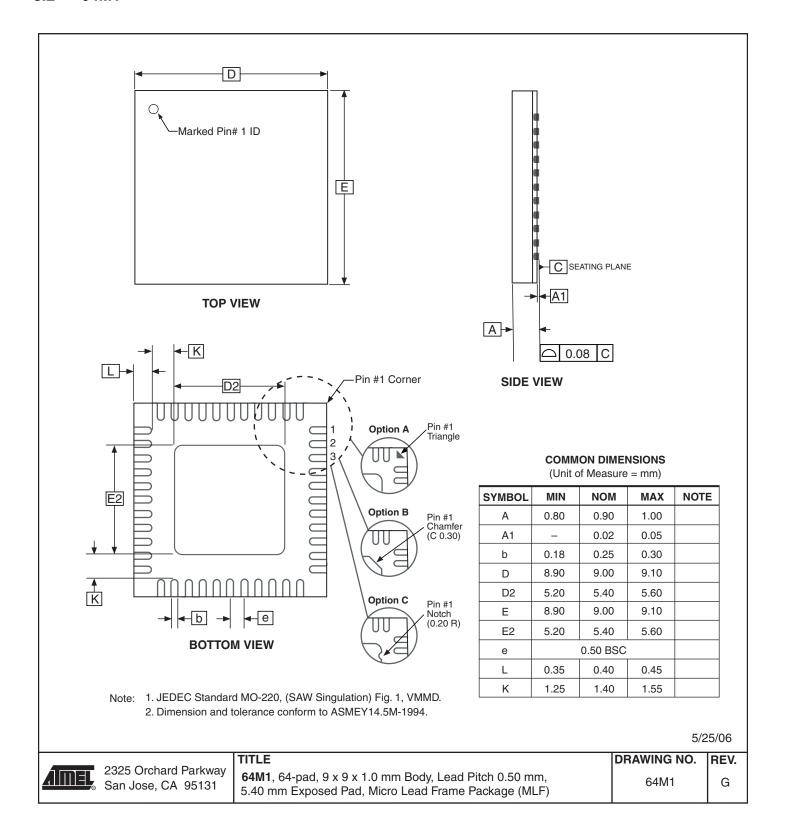

8.3 64MC







COMMON DIMENSIONS (Unit of Measure = mm)

SYMBOL	MIN	NOM	MAX	NOTE
Α	0.80	0.90	1.00	
A1	0.00	0.02	0.05	
b	0.18	0.23	0.28	
С	0.20 REF			
D	6.90	7.00	7.10	
D2	3.95	4.00	4.05	
Е	6.90	7.00	7.10	
E2	3.95	4.00	4.05	
eT	ı	0.65	_	
eR	ı	0.65	_	
K	0.20	_	-	(REF)
L	0.35	0.40	0.45	
у	0.00	_	0.075	

10/3/07



Note: 1. The terminal #1 ID is a Laser-marked Feature.

TITLE
64MC, 64QFN (2-Row Staggered),
7 x 7 x 1.00 mm Body, 4.0 x 4.0 mm Exposed Pad,
Quad Flat No Lead Package

GPC

ZXI

GPC DRAWING NO. REV.

ZXC 64MC A



- 9. Errata
- 9.1 ATmega169P Rev. G

No known errata.

9.2 ATmega169P Rev. A to F

Not sampled.



10. Datasheet Revision History

Please note that the referring page numbers in this section are referring to this document. The referring revision in this section are referring to the document revision.

10.1 Rev. 8018P 08/10

- 1. Status changed to active
- 2. EEPROM minimum wait delay, Table 27-15 on page 312, has been changed from 9.0 ms to 3.6 ms
- 3. Datasheet layout and technical terminology updated

10.2 Rev. 8018O 10/09

- Changed datasheet status to "Mature"
- 2. Added Capacitance for Low-frequency Crystal Oscillator, Table 8-5 on page 33.

10.3 Rev. 8018N 08/09

1. Updated "Ordering Information" on page 17, MCU replaced by MCH.

10.4 Rev. 8018M 07/09

1. Updated the last page with new Atmel's addresses.

10.5 Rev. L 08/08

- 1. Updated package information in "Features" on page 1.
- 2. Added "Pinout DRQFN" on page 3:
 - The Staggered QFN is named Dual Row QFN (DRQFN).

10.6 Rev. K 06/08

- 1. Updated package information in "Features" on page 1.
- 2. Removed "Disclaimer" from section "Pin Configurations" on page 2
- 3. Added "64MC (DRQFN) Pinout ATmega169P" on page 3
- 4. Added "Data Retention" on page 9.
- 5. Updated "Stack Pointer" on page 13.
- 6. Updated "Low-frequency Crystal Oscillator" on page 34.
- 7. Updated "USART Register Description" on page 194, register descriptions and tables.
- 8. Updated "UCSRnB USART Control and Status Register n B" on page 195.
- 9. Updated V_{IL2} in "DC Characteristics" on page 329, by removing 0.2V_{CC} from the table.



- 10. Replaced Figure 29-36 on page 357 by a correct one.
- 11. Updated "Ordering Information" on page 17.
- 12. Added "64MC" on page 20 package to "Packaging Information" on page 18.

10.7 Rev. J 08/07

- 1. Updated "Features" on page 1.
- 2. Added "Minimizing Power Consumption" on page 237 in the LCD section.
- 3. Updated "System and Reset Characteristics" on page 333.

10.8 Rev. I 11/06

- 1. Updated "Low-frequency Crystal Oscillator" on page 34.
- 2. Updated Table 8-8 on page 35, Table 8-9 on page 35, Table 8-10 on page 35, Table 28-7 on page 336.
- 3. Updated note in Table 28-7 on page 336.

10.9 Rev. H 09/06

- 1. All characterization data moved to "Electrical Characteristics" on page 329.
- 2. Updated "Calibrated Internal RC Oscillator" on page 32.
- 3. Updated "System Control and Reset" on page 47.
- 4. Added note to Table 27-16 on page 314.
- 5. Updated "LCD Controller Characteristics" on page 337.

10.10 Rev. G 08/06

1. Updated "LCD Controller Characteristics" on page 337.

10.11 Rev. F 08/06

- 1. Updated "DC Characteristics" on page 329.
- 2. Updated Table 13-19 on page 84.

10.12 Rev. E 08/06

- 1. Updated "Low-frequency Crystal Oscillator" on page 34.
- 2. Updated "Device Identification Register" on page 260.
- 3. Updated "Signature Bytes" on page 299.
- 4. Added Table 27-6 on page 299.



10.13 Rev. D 07/06

- 1. Updated "Register Description for I/O-Ports" on page 88.
- 2. Updated "Fast PWM Mode" on page 97.
- 3. Updated "Fast PWM Mode" on page 120.
- 4. Updated Table 14-2 on page 102, Table 14-4 on page 103, Table 15-3 on page 129, Table 15-4 on page 130, Table 17-2 on page 153 and Table 17-4 on page 154.
- 5 Updated "UCSRnC USART Control and Status Register n C" on page 196.
- 6. Updated Features in "USI Universal Serial Interface" on page 199.
- 7. Added "Clock speed considerations." on page 206.
- 8. Updated Features in "LCD Controller" on page 234.
- 9. Updated "Register Summary" on page 10.

10.14 Rev. C 06/06

- 1. Updated typos.
- 2. Updated "Calibrated Internal RC Oscillator" on page 32.
- 3. Updated "OSCCAL Oscillator Calibration Register" on page 38.
- 4. Added Table 28-2 on page 332.

10.15 Rev. B 04/06

1. Updated "Calibrated Internal RC Oscillator" on page 32.

10.16 Rev. A 03/06

1. Initial revision.





Headquarters

Atmel Corporation

2325 Orchard Parkway San Jose, CA 95131 USA

Tel: 1(408) 441-0311 Fax: 1(408) 487-2600

International

Atmel Asia

Unit 1-5 & 16, 19/F BEA Tower, Millennium City 5 418 Kwun Tong Road Kwun Tong, Kowloon Hong Kong

Tel: (852) 2245-6100 Fax: (852) 2722-1369 Atmel Europe

Le Krebs 8, Rue Jean-Pierre Timbaud BP 309 78054 Saint-Quentin-en-Yvelines Cedex

France

Tel: (33) 1-30-60-70-00 Fax: (33) 1-30-60-71-11

Atmel Japan

Japan

9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033

Tel: (81) 3-3523-3551 Fax: (81) 3-3523-7581

Product Contact

Web Site

www.atmel.com

Technical Support

avr@atmel.com

Sales Contact

www.atmel.com/contacts

Literature Requests

www.atmel.com/literature

Disclaimer: The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2010 Atmel Corporation. All rights reserved. Atmel[®], Atmel logo and combinations thereof, AVR[®], AVR[®] logo, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Windows[®] and others are registered trademarks or trademarks of Microsoft[®] Corporation in the US and/or other countries. Other terms and product names may be trademarks of others.