


Duty Cycle:	Continuous 100% On-Time	Intermittent 25% (100 Seconds Max)	UL Recognition Recognized under the Component Recognition Program of Underwriters Laboratories Inc. 
Power Consumption:	7.8 Watts	20 Watts	
Current Draw: 12VDC	0.632 Amp	1.54 Amps	
24VDC	0.315 Amp	0.82 Amps	
Holding Force: 12VDC	150 ounces	168 ounces	
24VDC	150 ounces	168 ounces	
Resistance: 12VDC	19.0 Ohms	7.78 Ohms	
24VDC	76.3 Ohms	29.3 Ohms	

Stroke, in inches:	0.050"	0.125"	0.250"	0.375"	0.500"	0.625"	0.750"	1.000"
Continuous Duty:	70	35	14	8	5	3	2	1
Intermittent Duty:	110	73	35	22	18	10	7	5

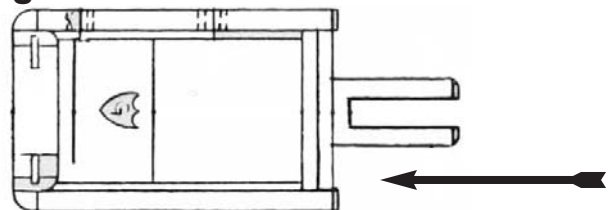

Guardian part numbers look like this:

Ordering Information

Model	Duty Cycle	Power Supply
11HD		
	I = Intermittent C = Continuous	12 VDC 24 VDC

The first number is the model number, the middle letter defines Intermittent or Continuous Duty cycle, and the third number is the power supply to the solenoid.