

RTS MUST COMPLY WITH TE SOLDERABILITY SPEC
09-11-3.



CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS
PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN
STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA
INDICATED AND TIN-LEAD ON SOLDER TAIL END.

CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE
INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY
DIFFER FROM PRINT.

CONTACT IS PLATED OVERALL WITH 0.00127 [.000050]
ICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT.
NGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

LL ACCEPT 1.98[.078] DIA PIN

RECORDED BY 350828-4

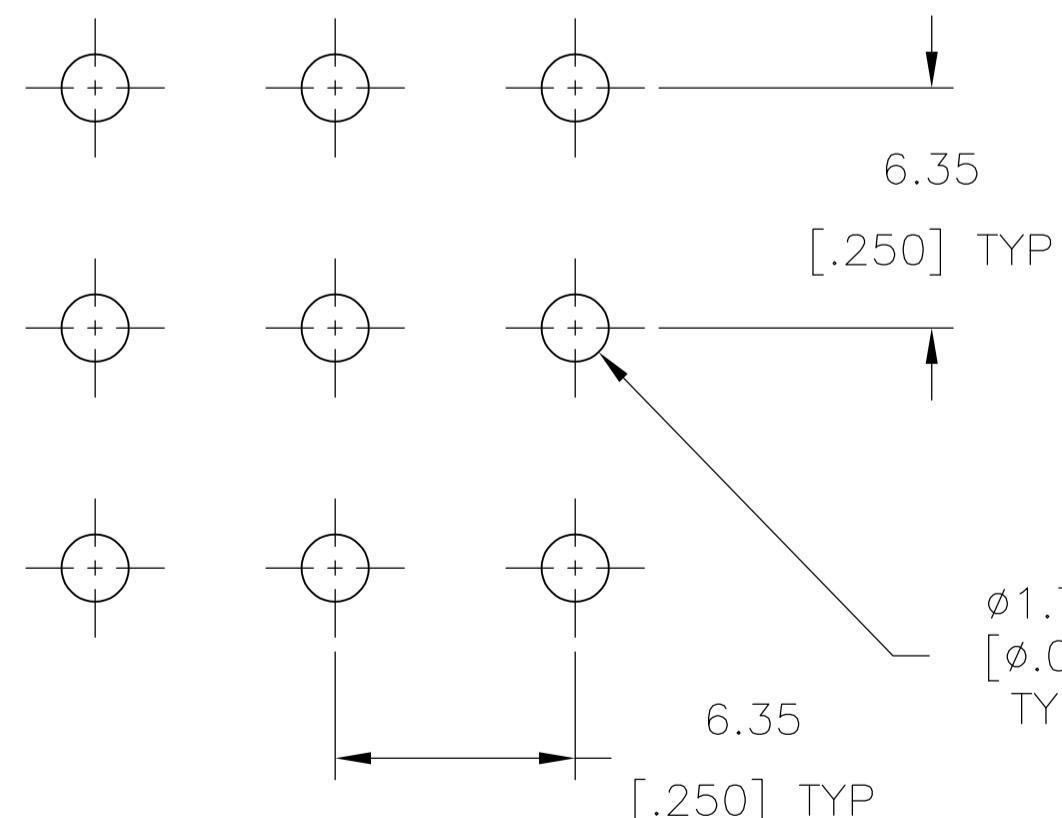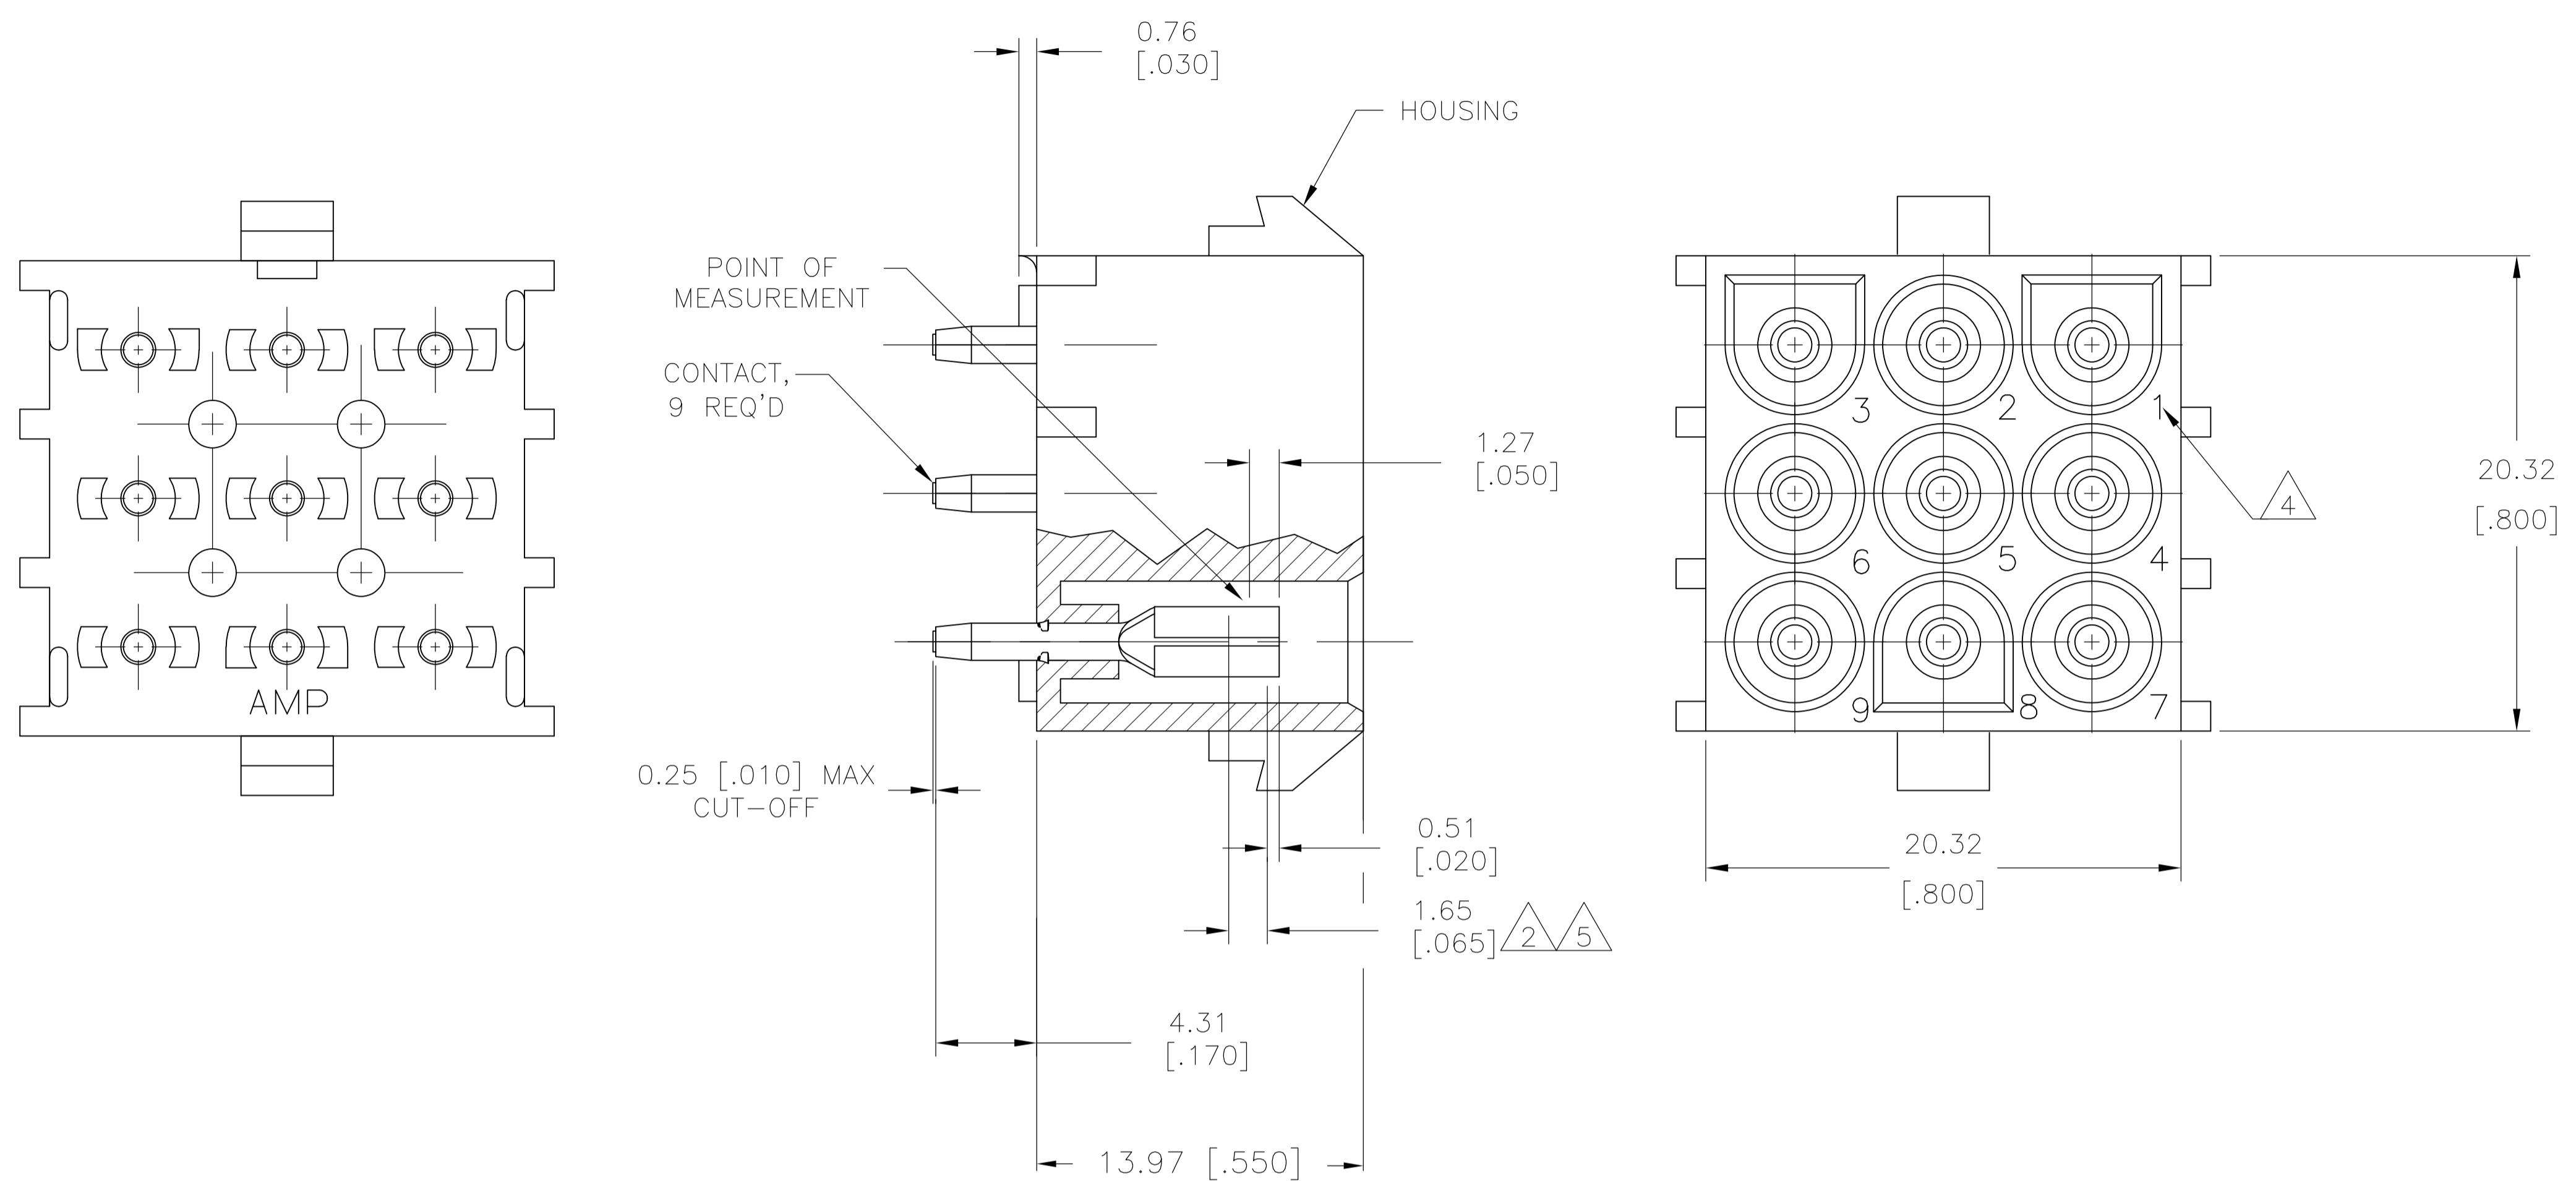

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD

	PH BRZ TIN	6	NYLON,UL 94V-0	350828-5
	PH BRZ GOLD	5	NYLON,UL 94V-0	350828-4
	PH BRZ GOLD	2	NYLON,UL 94V-0	350828-2
	PH BRZ TIN		NYLON,UL 94V-0	350828-1
	CONTACT		HOUSING	PART NO