

# LM231A/LM231/LM331A/LM331

## Precision Voltage-to-Frequency Converters

## General Description

The LM231/LM331 family of voltage-to-frequency converters are ideally suited for use in simple low-cost circuits for analog-to-digital conversion, precision frequency-to-voltage conversion, long-term integration, linear frequency modulation or demodulation, and many other functions. The output when used as a voltage-to-frequency converter is a pulse train at a frequency precisely proportional to the applied input voltage. Thus, it provides all the inherent advantages of the voltage-to-frequency conversion techniques, and is easy to apply in all standard voltage-to-frequency converter applications. Further, the LM231A/LM331A attain a new high level of accuracy versus temperature which could only be attained with expensive voltage-to-frequency modules. Additionally the LM231/331 are ideally suited for use in digital systems at low power supply voltages and can provide low-cost analog-to-digital conversion in microprocessor-controlled systems. And, the frequency from a battery powered voltage-to-frequency converter can be easily channeled through a simple photoisolator to provide isolation against high common mode levels.


The LM231/LM331 utilize a new temperature-compensated band-gap reference circuit, to provide excellent accuracy

over the full operating temperature range, at power supplies as low as 4.0V. The precision timer circuit has low bias currents without degrading the quick response necessary for 100 kHz voltage-to-frequency conversion. And the output is capable of driving 3 TTL loads, or a high voltage output up to 40V, yet is short-circuit-proof against  $V_{CC}$ .

## Features

- Guaranteed linearity 0.01% max
- Improved performance in existing voltage-to-frequency conversion applications
- Split or single supply operation
- Operates on single 5V supply
- Pulse output compatible with all logic forms
- Excellent temperature stability,  $\pm 50$  ppm/ $^{\circ}\text{C}$  max
- Low power dissipation, 15 mW typical at 5V
- Wide dynamic range, 100 dB min at 10 kHz full scale frequency
- Wide range of full scale frequency, 1 Hz to 100 kHz
- Low cost

## Typical Applications

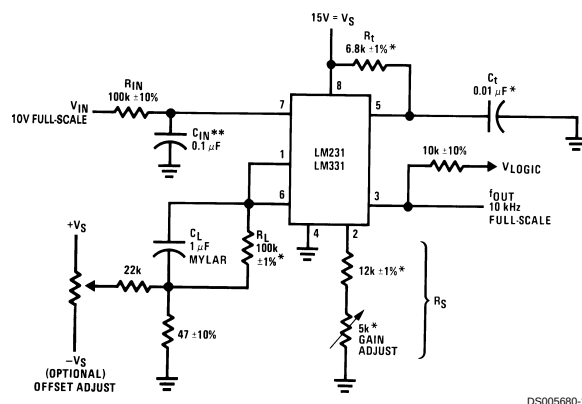

$$f_{OUT} = \frac{V_{IN}}{2.09 \text{ V}} \cdot \frac{R_S}{R_I} \cdot \frac{1}{R_I C_I}$$

\*Use stable components with low temperature coefficients. See Typical Applications section.

\*\*0.1μF or 1μF, See "Principles of Operation."

**FIGURE 1. Simple Stand-Alone Voltage-to-Frequency Converter with  $\pm 0.03\%$  Typical Linearity ( $f = 10 \text{ Hz}$  to  $11 \text{ kHz}$ )**

Teflon® is a registered trademark of DuPont

## Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

|                                                                                | LM231A/LM231                          | LM331A/LM331                        |
|--------------------------------------------------------------------------------|---------------------------------------|-------------------------------------|
| Supply Voltage                                                                 | 40V                                   | 40V                                 |
| Output Short Circuit to Ground                                                 | Continuous                            | Continuous                          |
| Output Short Circuit to $V_{CC}$                                               | Continuous                            | Continuous                          |
| Input Voltage                                                                  | -0.2V to $+V_S$                       | -0.2V to $+V_S$                     |
| Operating Ambient Temperature Range                                            | $T_{MIN}$ $T_{MAX}$<br>-25°C to +85°C | $T_{MIN}$ $T_{MAX}$<br>0°C to +70°C |
| Power Dissipation ( $P_D$ at 25°C)<br>and Thermal Resistance ( $\theta_{JA}$ ) |                                       |                                     |
| (N Package) $P_D$                                                              | 1.25W                                 | 1.25W                               |
| $\theta_{JA}$                                                                  | 100°C/W                               | 100°C/W                             |
| Lead Temperature (Soldering, 10 sec.)                                          |                                       |                                     |
| Dual-In-Line Package (Plastic)                                                 | 260°C                                 | 260°C                               |
| ESD Susceptibility (Note 4)                                                    |                                       |                                     |
| N Package                                                                      | 500V                                  | 500V                                |

## Electrical Characteristics

$T_A = 25^\circ\text{C}$  unless otherwise specified (Note 2)

| Parameter                                                                 | Conditions                                                 | Min          | Typ                  | Max                   | Units            |
|---------------------------------------------------------------------------|------------------------------------------------------------|--------------|----------------------|-----------------------|------------------|
| VFC Non-Linearity (Note 3)                                                | $4.5V \leq V_S \leq 20V$                                   |              | $\pm 0.003$          | $\pm 0.01$            | % Full-Scale     |
|                                                                           | $T_{MIN} \leq T_A \leq T_{MAX}$                            |              | $\pm 0.006$          | $\pm 0.02$            | % Full-Scale     |
| VFC Non-Linearity<br>In Circuit of Figure 1                               | $V_S = 15V$ , $f = 10\text{ Hz to } 11\text{ kHz}$         |              | $\pm 0.024$          | $\pm 0.14$            | % Full-Scale     |
| Conversion Accuracy Scale Factor (Gain)<br>LM231, LM231A<br>LM331, LM331A | $V_{IN} = -10V$ , $R_S = 14\text{ k}\Omega$                | 0.95<br>0.90 | 1.00<br>1.00         | 1.05<br>1.10          | kHz/V<br>kHz/V   |
| Temperature Stability of Gain<br>LM231/LM331<br>LM231A/LM331A             | $T_{MIN} \leq T_A \leq T_{MAX}$ , $4.5V \leq V_S \leq 20V$ |              | $\pm 30$<br>$\pm 20$ | $\pm 150$<br>$\pm 50$ | ppm/°C<br>ppm/°C |
| Change of Gain with $V_S$                                                 | $4.5V \leq V_S \leq 10V$<br>$10V \leq V_S \leq 40V$        |              | 0.01<br>0.006        | 0.1<br>0.06           | %/V<br>%/V       |
| Rated Full-Scale Frequency                                                | $V_{IN} = -10V$                                            | 10.0         |                      |                       | kHz              |
| Gain Stability vs Time<br>(1000 Hrs)                                      | $T_{MIN} \leq T_A \leq T_{MAX}$                            |              | $\pm 0.02$           |                       | % Full-Scale     |
| Overrange (Beyond Full-Scale) Frequency                                   | $V_{IN} = -11V$                                            | 10           |                      |                       | %                |
| <b>INPUT COMPARATOR</b>                                                   |                                                            |              |                      |                       |                  |
| Offset Voltage                                                            |                                                            |              | $\pm 3$              | $\pm 10$              | mV               |
| LM231/LM331                                                               | $T_{MIN} \leq T_A \leq T_{MAX}$                            |              | $\pm 4$              | $\pm 14$              | mV               |
| LM231A/LM331A                                                             | $T_{MIN} \leq T_A \leq T_{MAX}$                            |              | $\pm 3$              | $\pm 10$              | mV               |
| Bias Current                                                              |                                                            |              | -80                  | -300                  | nA               |
| Offset Current                                                            |                                                            |              | $\pm 8$              | $\pm 100$             | nA               |
| Common-Mode Range                                                         | $T_{MIN} \leq T_A \leq T_{MAX}$                            | -0.2         |                      | $V_{CC} - 2.0$        | V                |
| <b>TIMER</b>                                                              |                                                            |              |                      |                       |                  |
| Timer Threshold Voltage, Pin 5                                            |                                                            | 0.63         | 0.667                | 0.70                  | $\times V_S$     |
| Input Bias Current, Pin 5                                                 | $V_S = 15V$                                                |              |                      |                       |                  |
| All Devices                                                               | $0V \leq V_{PIN\ 5} \leq 9.9V$                             |              | $\pm 10$             | $\pm 100$             | nA               |
| LM231/LM331                                                               | $V_{PIN\ 5} = 10V$                                         |              | 200                  | 1000                  | nA               |
| LM231A/LM331A                                                             | $V_{PIN\ 5} = 10V$                                         |              | 200                  | 500                   | nA               |

## Electrical Characteristics (Continued)

$T_A = 25^\circ\text{C}$  unless otherwise specified (Note 2)

| Parameter                            | Conditions                                                         | Min  | Typ         | Max  | Units                 |
|--------------------------------------|--------------------------------------------------------------------|------|-------------|------|-----------------------|
| <b>TIMER</b>                         |                                                                    |      |             |      |                       |
| $V_{SAT\ PIN\ 5}$ (Reset)            | $I = 5\text{ mA}$                                                  |      | 0.22        | 0.5  | V                     |
| <b>CURRENT SOURCE (Pin 1)</b>        |                                                                    |      |             |      |                       |
| Output Current                       | $R_S = 14\text{ k}\Omega$ , $V_{PIN\ 1} = 0$                       |      |             |      |                       |
| LM231, LM231A                        |                                                                    | 126  | 135         | 144  | $\mu\text{A}$         |
| LM331, LM331A                        |                                                                    | 116  | 136         | 156  | $\mu\text{A}$         |
| Change with Voltage                  | $0\text{V} \leq V_{PIN\ 1} \leq 10\text{V}$                        |      | 0.2         | 1.0  | $\mu\text{A}$         |
| Current Source OFF Leakage           |                                                                    |      |             |      |                       |
| LM231, LM231A, LM331, LM331A         |                                                                    |      | 0.02        | 10.0 | nA                    |
| All Devices                          | $T_A = T_{MAX}$                                                    |      | 2.0         | 50.0 | nA                    |
| Operating Range of Current (Typical) |                                                                    |      | (10 to 500) |      | $\mu\text{A}$         |
| <b>REFERENCE VOLTAGE (Pin 2)</b>     |                                                                    |      |             |      |                       |
| LM231, LM231A                        |                                                                    | 1.76 | 1.89        | 2.02 | $V_{DC}$              |
| LM331, LM331A                        |                                                                    | 1.70 | 1.89        | 2.08 | $V_{DC}$              |
| Stability vs Temperature             |                                                                    |      | $\pm 60$    |      | ppm/ $^\circ\text{C}$ |
| Stability vs Time, 1000 Hours        |                                                                    |      | $\pm 0.1$   |      | %                     |
| <b>LOGIC OUTPUT (Pin 3)</b>          |                                                                    |      |             |      |                       |
| $V_{SAT}$                            | $I = 5\text{ mA}$                                                  |      | 0.15        | 0.50 | V                     |
|                                      | $I = 3.2\text{ mA}$ (2 TTL Loads), $T_{MIN} \leq T_A \leq T_{MAX}$ |      | 0.10        | 0.40 | V                     |
| OFF Leakage                          |                                                                    |      | $\pm 0.05$  | 1.0  | $\mu\text{A}$         |
| <b>SUPPLY CURRENT</b>                |                                                                    |      |             |      |                       |
| LM231, LM231A                        | $V_S = 5\text{V}$                                                  | 2.0  | 3.0         | 4.0  | mA                    |
| LM331, LM331A                        | $V_S = 40\text{V}$                                                 | 2.5  | 4.0         | 6.0  | mA                    |
|                                      | $V_S = 5\text{V}$                                                  | 1.5  | 3.0         | 6.0  | mA                    |
|                                      | $V_S = 40\text{V}$                                                 | 2.0  | 4.0         | 8.0  | mA                    |


**Note 1:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. DC and AC electrical specifications do not apply when operating the device beyond its specified operating conditions.

**Note 2:** All specifications apply in the circuit of Figure 4, with  $4.0\text{V} \leq V_S \leq 40\text{V}$ , unless otherwise noted.

**Note 3:** Nonlinearity is defined as the deviation of  $f_{OUT}$  from  $V_{IN} \times (10\text{ kHz} / 10\text{ V}_{DC})$  when the circuit has been trimmed for zero error at 10 Hz and at 10 kHz, over the frequency range 1 Hz to 11 kHz. For the timing capacitor,  $C_T$ , use NPO ceramic, Teflon®, or polystyrene.

**Note 4:** Human body model, 100 pF discharged through a 1.5 k $\Omega$  resistor.

## Functional Block Diagram

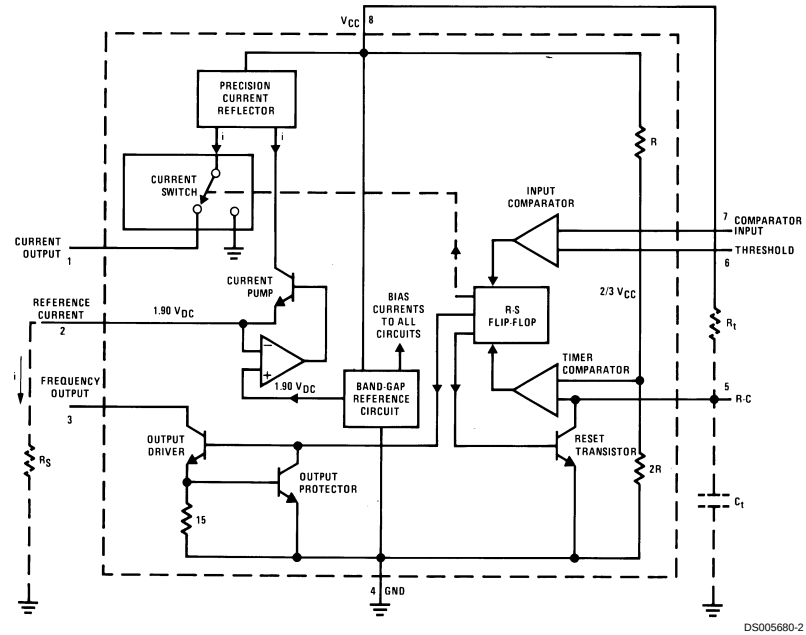


Pin numbers apply to 8-pin packages only.

FIGURE 2.


## Typical Performance Characteristics

(All electrical characteristics apply for the circuit of Figure 4, unless otherwise noted.)


**Nonlinearity Error as Precision V-to-F Converter (Figure 4)**




**Nonlinearity Error**




**Nonlinearity Error vs Power Supply Voltage**




**Frequency vs Temperature**




**V<sub>REF</sub> vs Temperature**




**Output Frequency vs V<sub>SUPPLY</sub>**




**100 kHz Nonlinearity Error (Figure 5)**



**Nonlinearity Error (Figure 1)**




**Input Current (Pins 6,7) vs Temperature**




## Typical Performance Characteristics (Continued)

Power Drain vs  $V_{SUPPLY}$




DS005680-34

Output Saturation Voltage vs  $I_{OUT}$  (Pin 3)



DS005680-35

Nonlinearity Error, Precision F-to-V Converter (Figure 7)



DS005680-36

## Typical Applications

### PRINCIPLES OF OPERATION OF A SIMPLIFIED VOLTAGE-TO-FREQUENCY CONVERTER


The LM231/331 are monolithic circuits designed for accuracy and versatile operation when applied as voltage-to-frequency (V-to-F) converters or as frequency-to-voltage (F-to-V) converters. A simplified block diagram of the LM231/331 is shown in Figure 3 and consists of a switched current source, input comparator, and 1-shot timer.

The operation of these blocks is best understood by going through the operating cycle of the basic V-to-F converter, Figure 3, which consists of the simplified block diagram of the LM231/331 and the various resistors and capacitors connected to it.

The voltage comparator compares a positive input voltage,  $V_1$ , at pin 7 to the voltage,  $V_x$ , at pin 6. If  $V_1$  is greater, the comparator will trigger the 1-shot timer. The output of the timer will turn ON both the frequency output transistor and the switched current source for a period  $t = 1.1 R_t C_t$ . During this period, the current  $i$  will flow out of the switched current source and provide a fixed amount of charge,  $Q = i \times t$ , into the capacitor,  $C_L$ . This will normally charge  $V_x$  up to a higher level than  $V_1$ . At the end of the timing period, the current  $i$  will turn OFF, and the timer will reset itself.

Now there is no current flowing from pin 1, and the capacitor  $C_L$  will be gradually discharged by  $R_L$  until  $V_x$  falls to the level of  $V_1$ . Then the comparator will trigger the timer and start another cycle.

The current flowing into  $C_L$  is exactly  $I_{AVE} = i \times (1.1 R_t C_t) \times f$ , and the current flowing out of  $C_L$  is exactly  $V_x / R_L \equiv V_{IN} / R_L$ . If  $V_{IN}$  is doubled, the frequency will double to maintain this balance. Even a simple V-to-F converter can provide a frequency precisely proportional to its input voltage over a wide range of frequencies.

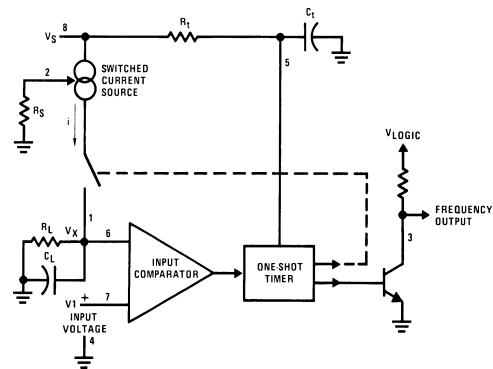

DS005680-4

FIGURE 3. Simplified Block Diagram of Stand-Alone Voltage-to-Frequency Converter and External Components

### DETAIL OF OPERATION, FUNCTIONAL BLOCK DIAGRAM (Figure 2)

The block diagram shows a band gap reference which provides a stable 1.9  $V_{DC}$  output. This 1.9  $V_{DC}$  is well regulated over a  $V_S$  range of 3.9V to 40V. It also has a flat, low temperature coefficient, and typically changes less than  $\frac{1}{2}\%$  over a 100°C temperature change.

The current pump circuit forces the voltage at pin 2 to be at 1.9V, and causes a current  $i = 1.90V / R_S$  to flow. For  $R_S = 14k$ ,  $i = 135 \mu A$ . The precision current reflector provides a current equal to  $i$  to the current switch. The current switch switches the current to pin 1 or to ground depending on the state of the  $R_S$  flip-flop.

The timing function consists of an  $R_S$  flip-flop, and a timer comparator connected to the external  $R_t C_t$  network. When the input comparator detects a voltage at pin 7 higher than pin 6, it sets the  $R_S$  flip-flop which turns ON the current switch and the output driver transistor. When the voltage at pin 5 rises to  $\frac{2}{3} V_{CC}$ , the timer comparator causes the  $R_S$  flip-flop to reset. The reset transistor is then turned ON and the current switch is turned OFF.

However, if the input comparator still detects pin 7 higher than pin 6 when pin 5 crosses  $\frac{2}{3} V_{CC}$ , the flip-flop will not be reset, and the current at pin 1 will continue to flow, in its attempt to make the voltage at pin 6 higher than pin 7. This

## Typical Applications (Continued)

condition will usually apply under start-up conditions or in the case of an overload voltage at signal input. It should be noted that during this sort of overload, the output frequency will be 0; as soon as the signal is restored to the working range, the output frequency will be resumed.

The output driver transistor acts to saturate pin 3 with an ON resistance of about 50Ω. In case of overvoltage, the output current is actively limited to less than 50 mA.

The voltage at pin 2 is regulated at  $1.90 V_{DC}$  for all values of  $i$  between 10 μA to 500 μA. It can be used as a voltage reference for other components, but care must be taken to ensure that current is not taken from it which could reduce the accuracy of the converter.

### PRINCIPLES OF OPERATION OF BASIC VOLTAGE-TO-FREQUENCY CONVERTER (Figure 1)

The simple stand-alone V-to-F converter shown in Figure 1 includes all the basic circuitry of Figure 3 plus a few components for improved performance.

A resistor,  $R_{IN}=100\text{ k}\Omega\pm10\%$ , has been added in the path to pin 7, so that the bias current at pin 7 (–80 nA typical) will cancel the effect of the bias current at pin 6 and help provide minimum frequency offset.

The resistance  $R_S$  at pin 2 is made up of a 12 kΩ fixed resistor plus a 5 kΩ (cermet, preferably) gain adjust rheostat. The function of this adjustment is to trim out the gain tolerance of the LM231/331, and the tolerance of  $R_i$ ,  $R_L$  and  $C_i$ .

For best results, all the components should be stable low-temperature-coefficient components, such as metal-film resistors. The capacitor should have low dielectric absorption; depending on the temperature characteristics desired, NPO ceramic, polystyrene, Teflon or polypropylene are best suited.

A capacitor  $C_{IN}$  is added from pin 7 to ground to act as a filter for  $V_{IN}$ . A value of 0.01 μF to 0.1 μF will be adequate in most cases; however, in cases where better filtering is required, a

1 μF capacitor can be used. When the RC time constants are matched at pin 6 and pin 7, a voltage step at  $V_{IN}$  will cause a step change in  $f_{OUT}$ . If  $C_{IN}$  is much less than  $C_L$ , a step at  $V_{IN}$  may cause  $f_{OUT}$  to stop momentarily.

A 47Ω resistor, in series with the 1 μF  $C_L$ , is added to give hysteresis effect which helps the input comparator provide the excellent linearity (0.03% typical).

### DETAIL OF OPERATION OF PRECISION V-TO-F CONVERTER (Figure 4)


In this circuit, integration is performed by using a conventional operational amplifier and feedback capacitor,  $C_F$ . When the integrator's output crosses the nominal threshold level at pin 6 of the LM231/331, the timing cycle is initiated.

The average current fed into the op amp's summing point (pin 2) is  $i \times (1.1 R_i C_i) \times f$  which is perfectly balanced with  $-V_{IN}/R_{IN}$ . In this circuit, the voltage offset of the LM231/331 input comparator does not affect the offset or accuracy of the V-to-F converter as it does in the stand-alone V-to-F converter; nor does the LM231/331 bias current or offset current. Instead, the offset voltage and offset current of the operational amplifier are the only limits on how small the signal can be accurately converted. Since op amps with voltage offset well below 1 mV and offset currents well below 2 nA are available at low cost, this circuit is recommended for best accuracy for small signals. This circuit also responds immediately to any change of input signal (which a stand-alone circuit does not) so that the output frequency will be an accurate representation of  $V_{IN}$ , as quickly as 2 output pulses' spacing can be measured.

In the precision mode, excellent linearity is obtained because the current source (pin 1) is always at ground potential and that voltage does not vary with  $V_{IN}$  or  $f_{OUT}$ . (In the stand-alone V-to-F converter, a major cause of non-linearity is the output impedance at pin 1 which causes  $i$  to change as a function of  $V_{IN}$ ).

The circuit of Figure 5 operates in the same way as Figure 4, but with the necessary changes for high speed operation.

## Typical Applications (Continued)

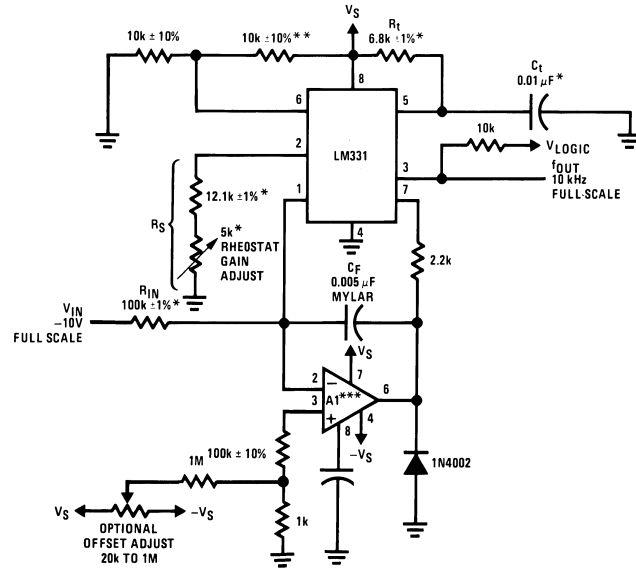

DS005680-5

$$f_{OUT} = \frac{-V_{IN}}{2.09 V} \cdot \frac{R_S}{R_{IN}} \cdot \frac{1}{R_1 C_1}$$

\*Use stable components with low temperature coefficients. See Typical Applications section.

\*\*This resistor can be 5 kΩ or 10 kΩ for  $V_S=8V$  to 22V, but must be 10 kΩ for  $V_S=4.5V$  to 8V.

\*\*\*Use low offset voltage and low offset current op amps for A1: recommended type LF411A

**FIGURE 4. Standard Test Circuit and Applications Circuit, Precision Voltage-to-Frequency Converter**




## Typical Applications (Continued)

### DETAILS OF OPERATION, FREQUENCY-TO-VOLTAGE CONVERTERS (Figure 6 and Figure 7)

In these applications, a pulse input at  $f_{IN}$  is differentiated by a C-R network and the negative-going edge at pin 6 causes the input comparator to trigger the timer circuit. Just as with a V-to-F converter, the average current flowing out of pin 1 is  $I_{AVERAGE} = i \times (1.1 R_i C_i) \times f$ .

In the simple circuit of Figure 6, this current is filtered in the network  $R_L = 100 \text{ k}\Omega$  and  $1 \mu\text{F}$ . The ripple will be less than 10 mV peak, but the response will be slow, with a 0.1 second time constant, and settling of 0.7 second to 0.1% accuracy.

In the precision circuit, an operational amplifier provides a buffered output and also acts as a 2-pole filter. The ripple will be less than 5 mV peak for all frequencies above 1 kHz, and the response time will be much quicker than in Figure 6. However, for input frequencies below 200 Hz, this circuit will have worse ripple than Figure 6. The engineering of the filter time-constants to get adequate response and small enough ripple simply requires a study of the compromises to be made. Inherently, V-to-F converter response can be fast, but F-to-V response can not.

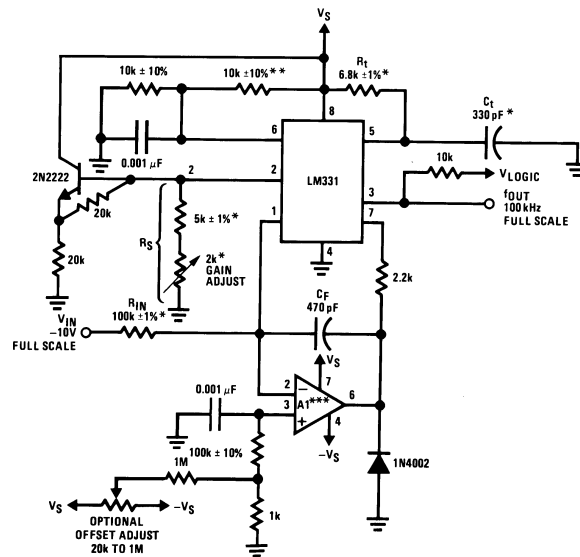

DS005680-6

\*Use stable components with low temperature coefficients.


See Typical Applications section.

\*\*This resistor can be 5 kΩ or 10 kΩ for  $V_S=8\text{V}$  to 22V, but must be 10 kΩ for  $V_S=4.5\text{V}$  to 8V.

\*\*\*Use low offset voltage and low offset current op amps for A1: recommended types LF411A or LF356.

**FIGURE 5. Precision Voltage-to-Frequency Converter,  
100 kHz Full-Scale,  $\pm 0.03\%$  Non-Linearity**

## Typical Applications (Continued)

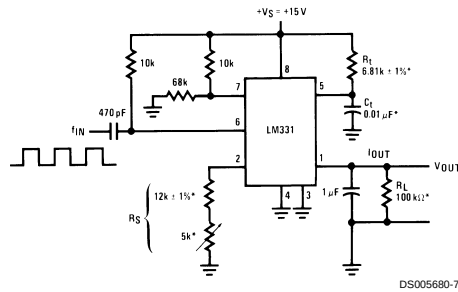


DS005680-7

$$V_{OUT} = f_{IN} \times 2.09V \times \frac{R_L}{R_S} \times (R_1 C_1)$$

\*Use stable components with low temperature coefficients.

**FIGURE 6. Simple Frequency-to-Voltage Converter,  
10 kHz Full-Scale, ±0.06% Non-Linearity**

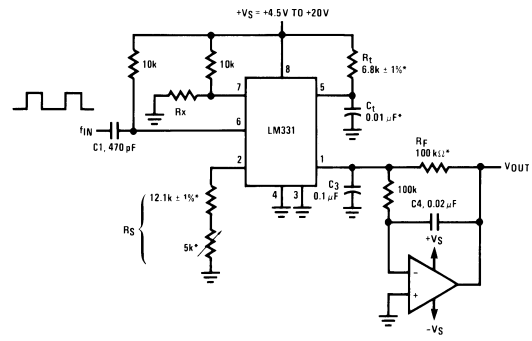

DS005680-8


$$V_{OUT} = -f_{IN} \times 2.09V \times \frac{R_F}{R_S} \times (R_1 C_1)$$

$$\text{SELECT } R_X = \frac{(V_S - 2V)}{0.2 \text{ mA}}$$

\*Use stable components with low temperature coefficients.

**FIGURE 7. Precision Frequency-to-Voltage Converter,  
10 kHz Full-Scale with 2-Pole Filter, ±0.01%  
Non-Linearity Maximum**


### Light Intensity to Frequency Converter

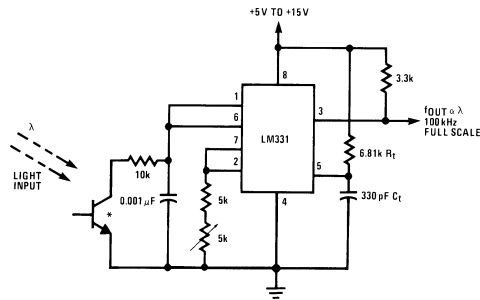

DS005680-9

\*L14F-1, L14G-1 or L14H-1, photo transistor (General Electric Co.) or similar


### Temperature to Frequency Converter

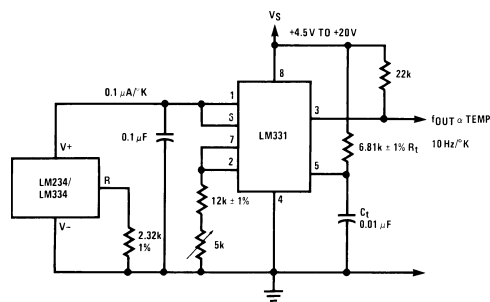


DS005680-10

## Typical Applications (Continued)


Long-Term Digital Integrator Using VFC

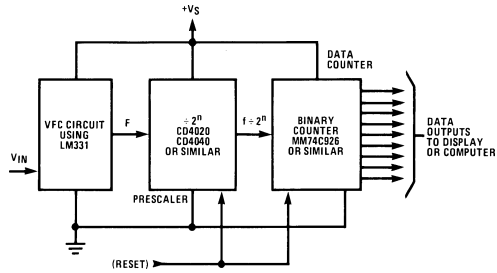


Basic Analog-to-Digital Converter Using Voltage-to-Frequency Converter

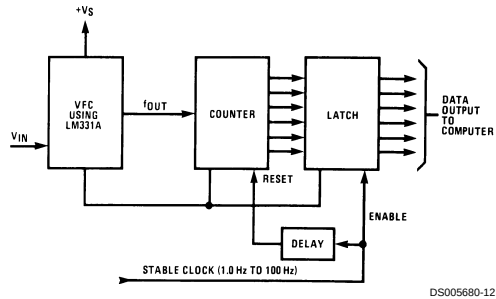

Analog-to-Digital Converter with Microprocessor

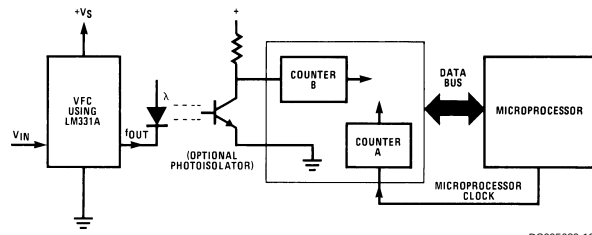


Remote Voltage-to-Frequency Converter with 2-Wire Transmitter and Receiver

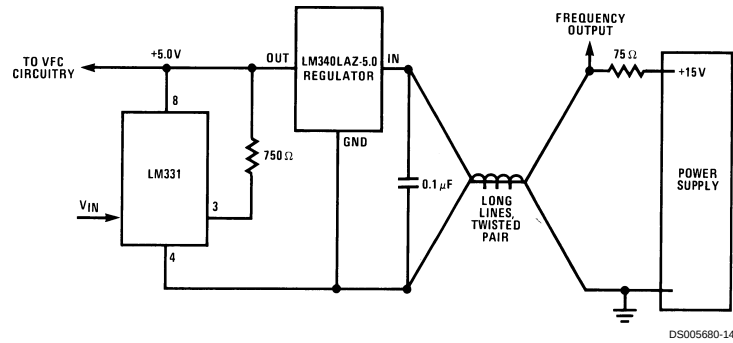


## Typical Applications (Continued)

### Voltage-to-Frequency Converter with Square-Wave Output Using $\div 2$ Flip-Flop

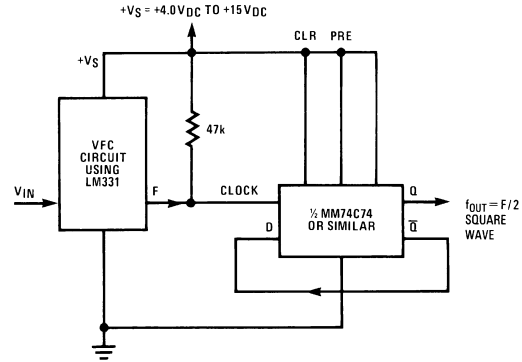


DS005680-15

### Voltage-to-Frequency Converter with Isolators

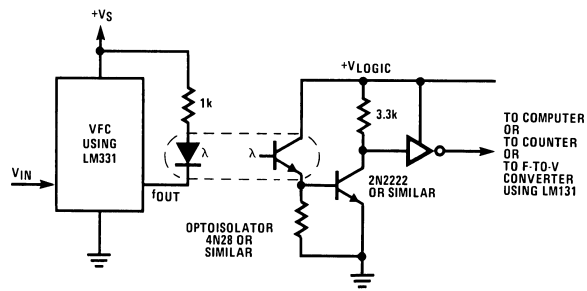

DS005680-16


### Voltage-to-Frequency Converter with Isolators

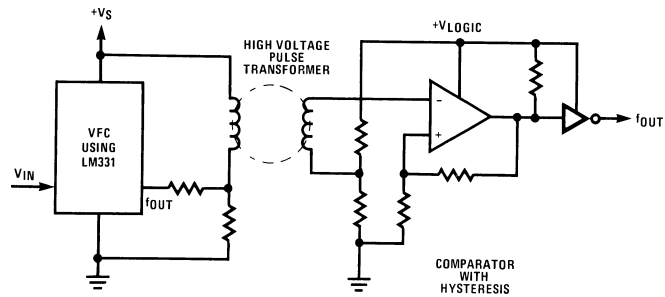

DS005680-17


## Typical Applications (Continued)

### Voltage-to-Frequency Converter with Isolators

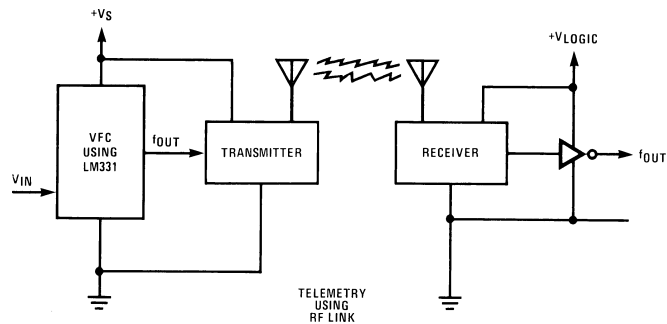


DS005680-18

### Voltage-to-Frequency Converter with Isolators

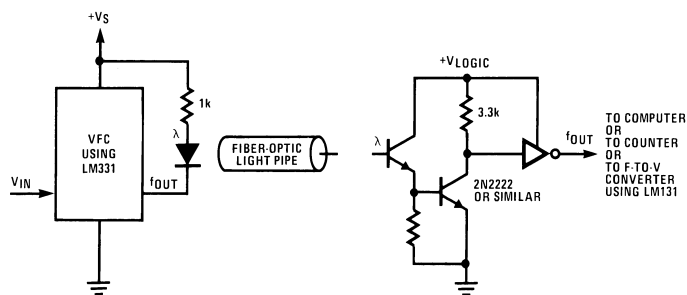

DS005680-19


## Connection Diagram

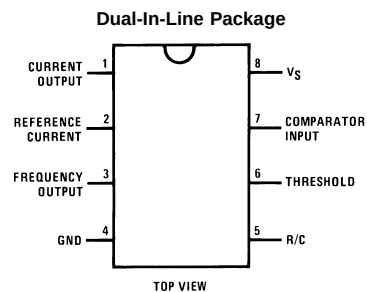

DS005680-21

Order Number LM231AN, LM231N, LM331AN,  
or LM331N  
See NS Package Number N08E


# Schematic Diagram

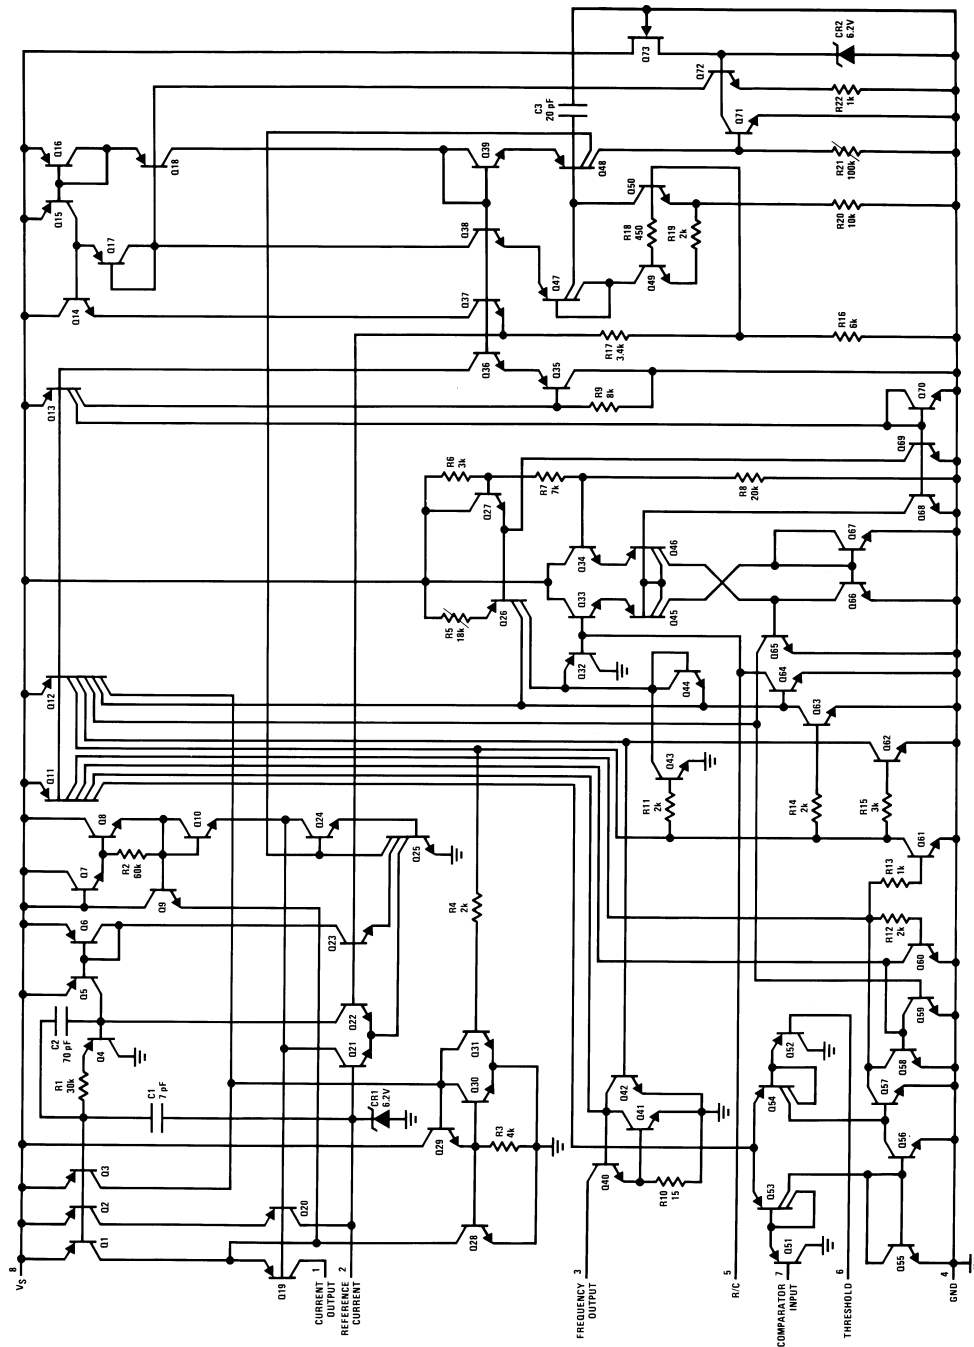

DS000680-22

# Physical Dimensions

inches (millimeters) unless otherwise noted

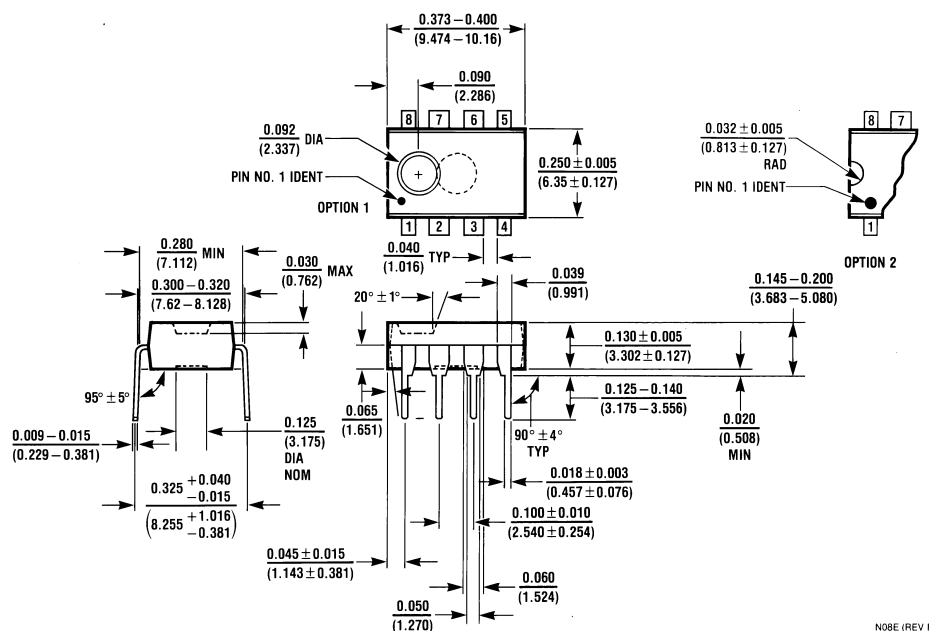

**Dual-In-Line Package (N)**  
**Order Number LM231AN, LM231N, LM331AN, or LM331N**  
**NS Package N08E**

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
Americas  
Tel: 1-800-272-9959  
Fax: 1-800-737-7018  
Email: support@nsc.com

www.national.com

**National Semiconductor Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 1 80-530 85 85  
English Tel: +49 (0) 1 80-532 78 32  
Français Tel: +49 (0) 1 80-532 93 58  
Italiano Tel: +49 (0) 1 80-534 16 80

**National Semiconductor Asia Pacific Customer Response Group**  
Tel: 65-2544466  
Fax: 65-2504466  
Email: sea.support@nsc.com

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5639-7560  
Fax: 81-3-5639-7507