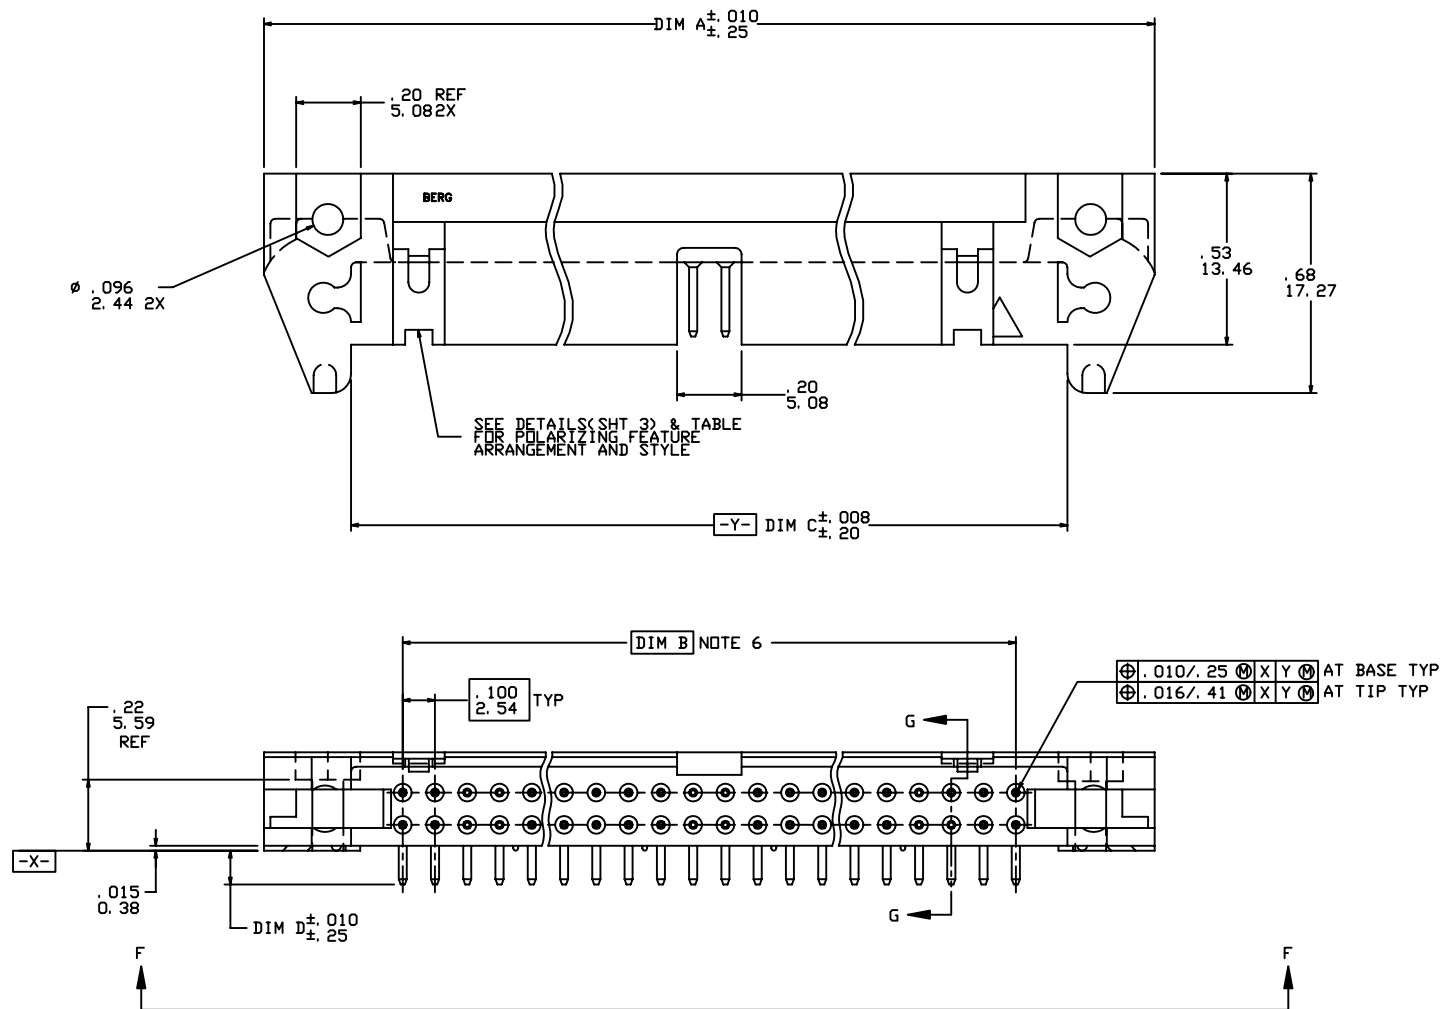

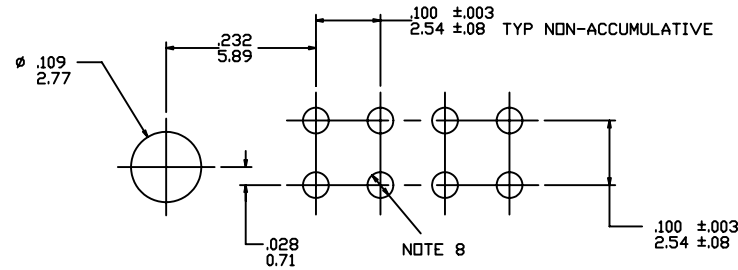
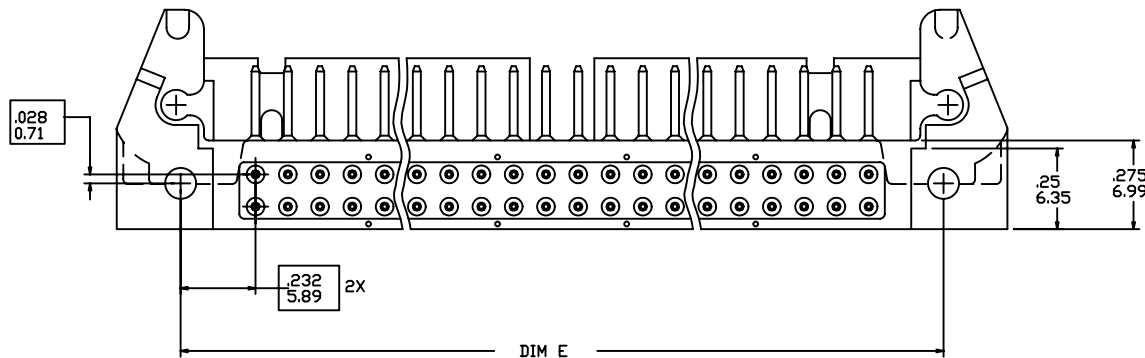




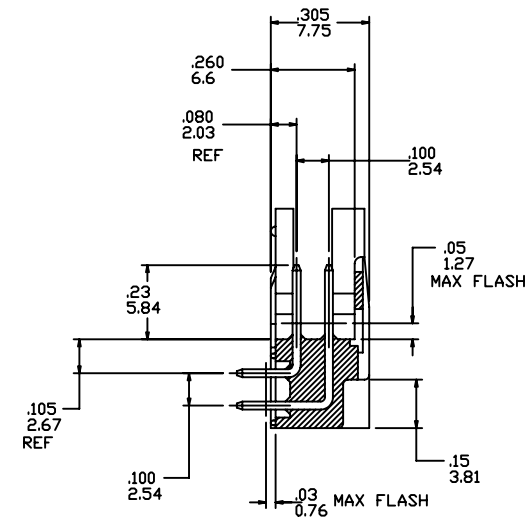
mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY				 www.fciconnect.com																
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3				projection				title															
AC	I40002	LSS	07/22/94		.XXX±.005/.XX±.13								HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE															
AD	N05-0129	ZC	5/20/05		.XXX±.0020/.XXX±.051																							
AE	N05-0151	WG	7/31/07	angles	0°±2°																							
AF	N08-0175	R.B	2008/08/22	dr	J. SHREINER	1/16/90		INCH/MM				product family				QUICKIE				code								
				engr	M. SMYK	1/16/90						size				dwg no				—								
				chr	M. SMYK	1/16/90		scale				A				65823				sheet 1 of 21								
				appd	M. SMYK	1/16/90		5:1																				
AE	sheet	revision	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	AF	
21	index	sheet	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20						




RECOMMENDED HOLE PATTERN
SCALE 10:1






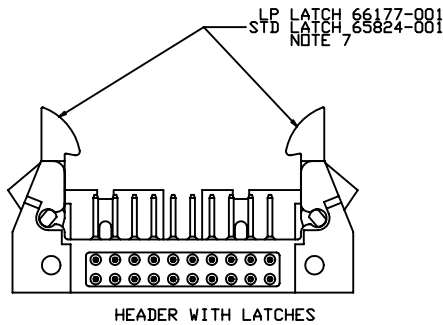


VIEW F-F



SECTION G-G
ROTATED 90°CW

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	angles				
AF				.XX±.01/.X±.3		projection	 INCH/MM		
				.XXX±.005/.XX±.13					
				.XXX±.0020/.XXX±.051			title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
				0°±2°					
				dr J. SHREINER 1/16/90		scale	product family QUICKIE		code —
				enr M. SMYK 1/16/90		5:1			
				chr M. SMYK 1/16/90			size 65823		sheet 2 of 21
				appd M. SMYK 1/16/90					
21	sheet index	revision sheet							




NOTES:

- RECOMMENDED MOUNTING SCREW SIZE: #2-56 FILLISTER HD MACH SCREW, 3/8" LG FOR 1/16" & 3/32" BOARD, 7/16" LG FOR 1/8" BOARD.
- MOLDING MAT'L: 30% GLASS FILLED POLYESTER, FLAME RETARDANT PER UL-94V-0, COLOR: BLUE.
- PIN MAT'L: 3/4 HARD PHOS BRONZE ALLOY UNS C-51000.
- 1° MAX DRAFT PERMISSIBLE ON ALL SURFACES UNLESS OTHERWISE SPECIFIED.
- PLATING ON LEAD-IN PORTION OF PIN IS MANUFACTURING OPTION.
- B** BASIC DIM SHALL BE LOCATED SYMMETRICAL TO DATUM -Y-.
- LOW PROFILE LATCHES TO BE USED WITH FEMALE CONNECTOR WITHOUT STRAIN RELIEF. STANDARD LATCHES TO BE USED WITH FEMALE CONNECTOR WITH STRAIN RELIEF.
- .040±.003/.1.02±.08 DIA HOLE TYP FOR SQ PINS, .035±.003/.89±.08. DIA HOLE TYP FOR RND PINS.
- RETENTION FEATURE AVAILABLE ON CONNECTORS WITH .105/2.67, .120/3.05, OR .150/3.81 TAIL LENGTH. RETENTION P/N INCLUDES THE LETTER "R" AFTER THE EXISTING P/N.
EXAMPLE: 65823-XXX FOR EXISTING P/N
65823-XXXX FOR RETENTION P/N
RETENTION FEATURE LOCATION IS MANUFACTURERS OPTION.
 - ROUND PINS HAVE 15 LBS/6.8 KGS MAX INSERTION AND .25 LB/.1 KG MIN RETENTION FORCE WHEN USED IN .035±.003/.89±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
 - SQUARE PINS HAVE A 15 LBS/6.8 KG MAX INSERTION AND .5 LB/.2 KG MIN RETENTION FORCE WHEN USED IN .040±.003/1.02±.08 DIA HOLES AND .062/1.57 THICK PC BOARD.
- 65496-***LF IS JUST A LEAD FREE PRODUCT.
- THE HOUSING OF XXXXX-XYLF WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER PROCESS.
- PLATING OPTION: MAYBE EITHER GOLD OR GXT PLATING AT MANUFACTURER'S OPTION .

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date						
AF				linear	.XX±.01/.X±.3	projection	 title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051		 product family QUICKIE		
				angles	0°±2°				
				dr	J. SHREINER 1/16/90	INCH/MM	size dwg no 65823		
				enrg	M. SMYK 1/16/90				
				chr	M. SMYK 1/16/90	scale	sheet 3 of 21		
				appd	M. SMYK 1/16/90	5:1			
	sheet index	revision sheet							
21									



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-001(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76 Au OVER 50u" / 1.27uNi	A
-002(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-003(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-004(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-005(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-006(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u" / 3.81u Sn	A
-007(LF)	2x7		RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30u" / .76 Au OVER 50u" / 1.27uNi	C
-008(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-009(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-010(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-011(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-012(LF)	2x7		SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150u" / 3.81u Sn	C
-013(LF)	2x8		RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4	30u" / .76 Au OVER 50u" / 1.27uNi	D
-014(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-015(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-016(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-017(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-018(LF)	2x8		SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.4	150u" / 3.81u Sn	
-019(LF)	2x10		RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u" / .76 Au OVER 50u" / 1.27uNi	
-020(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-021(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-022(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-023(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-024(LF)	2x10		SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150u" / 3.81u Sn	
-025(LF)	2x13		RND	2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.1	30u" / .76 Au OVER 50u" / 1.27uNi	
-026(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-027(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-028(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-029(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
-030(LF)	2x13		SQ	2.060/52.32	1.200/30.48	1.520/38.61	.675/17.15	1.66/42.1	150u" / 3.81u Sn	
-031(LF)	2x17		RND	2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3	30u" / .76 Au OVER 50u" / 1.27uNi	
-032(LF)			SQ				.105/2.67		150u" / 3.81u Sn	
-033(LF)			RND				.150/3.81		30u" / .76 Au OVER 50u" / 1.27uNi	
-034(LF)			SQ				.150/3.81		150u" / 3.81u Sn	
-035(LF)			SQ				.675/17.15		30u" / .76 Au OVER 50u" / 1.27uNi	
65823-036(LF)	2x17	ND	SQ	2.460/62.48	1.600/40.64	1.920/48.77	.675/17.15	2.06/52.3	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE			
AF					.XXX±.005/.XX±.13							
					.XXXX±.0020/.XXX±.051							
				angles	0°±2°			INCH/MM 	product family QUICKIE size dwg no A 65823			
				dr	J. SHREINER	1/16/90						
				engr	M. SMYK	1/16/90						
				chr	M. SMYK	1/16/90						
				appd	M. SMYK	1/16/90						
sheet index		revision sheet						scale 5:1				





1 | 2

3 |

4

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-037(LF)	2x20	ND	RND	2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.9	30u" / .76u Au OVER 50u" / 1.27u Ni	D
↑ -038(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -039(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -040(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -041(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -042(LF)	2x20	↑	SQ	2.760/70.10	1.900/48.26	2.220/56.39	.675/17.15	2.36/59.9	150u" / 3.81u Sn	↑
↑ -043(LF)	2x25	↑	RND	3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.6	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -044(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -045(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -046(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -047(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -048(LF)	2x25	ND	SQ	3.260/82.80	2.400/60.96	2.720/69.09	.675/17.15	2.86/72.6	150u" / 3.81u Sn	D
↑ -049(LF)	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u Au OVER 50u" / 1.27u Ni	A
↑ -050(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -051(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -052(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -053(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -054(LF)	2x5	↑	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u" / 3.81u Sn	A
↑ -055(LF)	2x7	↑	RND	1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9	30u" / .76u Au OVER 50u" / 1.27u Ni	C
↑ -056(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -057(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -058(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -059(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -060(LF)	2x7	↑	SQ	1.460/37.08	.600/15.24	.920/23.37	.675/17.15	1.06/26.9	150u" / 3.81u Sn	C
↑ -061(LF)	2x8	↑	RND	1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4	30u" / .76u Au OVER 50u" / 1.27u Ni	D
↑ -062(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -063(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -064(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -065(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
↑ -066(LF)	2x8	↑	SQ	1.560/39.62	.700/17.78	1.020/25.91	.675/17.15	1.16/29.4	150u" / 3.81u Sn	↑
↑ -067(LF)	2x10	↑	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -068(LF)	↑	↑	SQ	↑	↑	↑	.105/2.67	↑	150u" / 3.81u Sn	↑
↑ -069(LF)	↑	↑	RND	↑	↑	↑	.150/3.81	↑	30u" / .76u Au OVER 50u" / 1.27u Ni	↑
↑ -070(LF)	↑	↑	SQ	↑	↑	↑	.150/3.81	↑	150u" / 3.81u Sn	↑
↑ -071(LF)	↓	↓	SQ	↓	↓	↓	.675/17.15	↓	30u" / .76u Au OVER 50u" / 1.27u Ni	↓
65823-072(LF)	2x10	STD	SQ	1.760/44.70	.900/22.86	1.220/30.99	.675/17.15	1.36/34.5	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	
AF					.XXX±.005/.XX±.13					
					.XXXX±.0020/.XXX±.051					
				angles	0°±2°				product family QUICKIE	
				dr	J. SHREINER	1/16/90	code —			
				enr	M. SMYK	1/16/90				
				appd	M. SMYK	1/16/90				
PDM-Rev-A							scale 5:1		Released 65823 Printed: Apr 12, 2011	
							STATUS		sheet 5 of 21	



A

B

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-073 <LF>	2x13	STD	RND	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 105/2. 67	1. 66/42. 1	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-074 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-075 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-076 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-077 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-078 <LF>	2x13		SQ	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 675/17. 15	1. 66/42. 1	150u" / 3. 81u' 1/27u Ni	
-079 <LF>	2x17		RND	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 105/2. 67	2. 06/52. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-080 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-081 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-082 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-083 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-084 <LF>	2x17		SQ	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 675/17. 15	2. 06/52. 3	150u" / 3. 81u' 1/27u Ni	
-085 <LF>	2x20		RND	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 105/2. 67	2. 36/59. 9	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-086 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-087 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-088 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-089 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-090 <LF>	2x20		SQ	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 675/17. 15	2. 36/59. 9	150u" / 3. 81u' 1/27u Ni	
-091 <LF>	2x25		RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-092 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-093 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-094 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-095 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-096 <LF>	2x25	STD	SQ	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 675/17. 15	2. 86/72. 6	150u" / 3. 81u' 1/27u Ni	
-097 <LF>	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-098 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-099 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-100 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-101 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-102 <LF>		ND	SQ				. 675/17. 15		150u" / 3. 81u' 1/27u Ni	
-103 <LF>		STD	RND				. 105/2. 67		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-104 <LF>			SQ				. 105/2. 67		150u" / 3. 81u' 1/27u Ni	
-105 <LF>			RND				. 150/3. 81		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-106 <LF>			SQ				. 150/3. 81		150u" / 3. 81u' 1/27u Ni	
-107 <LF>			SQ				. 675/17. 15		30u" / . 76u Au OVER 50u" / 1. 27u Ni	
65823-108 <LF>	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	150u" / 3. 81u' 1/27u Ni	D


mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
				angles	0°±2°	INCH/MM ←→	scale 5:1	size A	sheet 6 of 21
				dr	J. SHREINER 1/16/90				
				enr	M. SMYK 1/16/90				
				chr	M. SMYK 1/16/90				
				appd	M. SMYK 1/16/90				
sheet index		revision sheet							
21									

A

B





	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-109(LF)	2x5	ND	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u Au OVER 50u" / 1.27u Ni	A
-110(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-111(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-112(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-113(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-114(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-115(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-116(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-117(LF)	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79		3.36/85.3		D
-118(LF)	2x5	STD		1.260/32.00	.400/10.16	.720/18.29		.86/21.8		A
-119(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-120(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-121(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-122(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-123(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-124(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-125(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-126(LF)	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3	30u" / .76u Au OVER 50u" / 1.27u Ni	D
-127(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8	30u" / .76u GXT/GOLD FLASH	A
-128(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-129(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-130(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-131(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-132(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-133(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-134(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-135(LF)	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79		3.36/85.3		D
-136(LF)	2x5	STD		1.260/32.00	.400/10.16	.720/18.29		.86/21.8		A
-137(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-138(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-139(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-140(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-141(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-142(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-143(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
65823-144(LF)	2x30	STD	RND	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3	30u" / .76u GXT/GOLD FLASH	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
				angles	0°±2°	INCH/MM ←→	scale 5:1	size A	sheet 7 of 21
				dr	J. SHREINER 1/16/90				
				enr	M. SMYK 1/16/90				
				chr	M. SMYK 1/16/90	sheet index	revision sheet		
				appd	M. SMYK 1/16/90				
21									



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-145 (LF)	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	30u' /. 76u Au OVER 50u' /1. 27u Ni	A
↑ -146 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	↑
-147 (LF)			RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	↑
-148 (LF)			SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	↑
-149 (LF)			SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	↓
-150 (LF)	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8	150u' /3. 81u Sn	A
-151 (LF)	2x7		RND	1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 105/2. 67	1. 06/26. 9	30u' /. 76u Au OVER 50u' /1. 27u Ni	C
-152 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	↑
-153 (LF)	↑	↑	RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	↑
-154 (LF)	↑	↑	SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	↑
-155 (LF)	↓	↓	SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	↓
-156 (LF)	2x7		SQ	1. 460/37. 08	. 600/15. 24	. 920/23. 37	. 675/17. 15	1. 06/26. 9	150u' /3. 81u Sn	C
-157 (LF)	2x8		RND	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 105/2. 67	1. 16/29. 4	30u' /. 76u Au OVER 50u' /1. 27u Ni	D
-158 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	↑
-159 (LF)	↑	↑	RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	↑
-160 (LF)	↑	↑	SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	↑
-161 (LF)	↓	↓	SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	↓
-162 (LF)	2x8		SQ	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	. 675/17. 15	1. 16/29. 4	150u' /3. 81u Sn	
-163 (LF)	2x10		RND	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 105/2. 67	1. 36/34. 5	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-164 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	
-165 (LF)	↑	↑	RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-166 (LF)	↑	↑	SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	
-167 (LF)	↓	↓	SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-168 (LF)	2x10		SQ	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	. 675/17. 15	1. 36/34. 5	150u' /3. 81u Sn	
-169 (LF)	2x13		RND	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 105/2. 67	1. 66/42. 1	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-170 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	
-171 (LF)	↑	↑	RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-172 (LF)	↑	↑	SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	
-173 (LF)	↓	↓	SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-174 (LF)	2x13		SQ	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	. 675/17. 15	1. 66/42. 1	150u' /3. 81u Sn	
-175 (LF)	2x17		RND	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 105/2. 67	2. 06/52. 3	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-176 (LF)	↑	↑	SQ	↑	↑	↑	. 105/2. 67	↑	150u' /3. 81u Sn	
-177 (LF)	↑	↑	RND	↑	↑	↑	. 150/3. 81	↑	30u' /. 76u Au OVER 50u' /1. 27u Ni	
-178 (LF)	↑	↑	SQ	↑	↑	↑	. 150/3. 81	↑	150u' /3. 81u Sn	
↓ -179 (LF)	↓	↓	SQ	↓	↓	↓	. 675/17. 15	↓	30u' /. 76u Au OVER 50u' /1. 27u Ni	↓
65823-180 (LF)	2x17	LP	SQ	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	. 675/17. 15	2. 06/52. 3	150u' /3. 81u Sn	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com			
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE			
AF					.XXX±.005/.XX±.13					
					.XXX±.0020/.XXX±.051					
				angles	0°±2°	INCH/MM 	product family QUICKIE		code	
				dr	J. SHREINER		1/16/90	size dwg no		
				enr	M. SMYK		1/16/90			
				chr	M. SMYK		1/16/90			
				appd	M. SMYK	1/16/90	scale 5:1	A	65823	sheet 8 of 21
sheet index		revision sheet								
21										



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-181(LF)	2x20	LP	RND	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 105/2. 67	2. 36/59. 9	30u" / . 76u OVER 50u" / 1. 27u Ni	D
-182(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-183(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-184(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-185(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-186(LF)	2x20		SQ	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	. 675/17. 15	2. 36/59. 9	150u" / 3. 81u Sn	
-187(LF)	2x25		RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u OVER 50u" / 1. 27u Ni	
-188(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-189(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-190(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-191(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-192(LF)	2x25		SQ	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 675/17. 15	2. 86/72. 6	150u" / 3. 81u Sn	
-193(LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u OVER 50u" / 1. 27u Ni	
-194(LF)			SQ				. 105/2. 67		150u" / 3. 81u Sn	
-195(LF)			RND				. 150/3. 81		30u" / . 76u OVER 50u" / 1. 27u Ni	
-196(LF)			SQ				. 150/3. 81		150u" / 3. 81u Sn	
-197(LF)			SQ				. 675/17. 15		30u" / . 76u OVER 50u" / 1. 27u Ni	
-198(LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	150u" / 3. 81u Sn	D
-199(LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	30u" / . 76u OVER 50u" / 1. 27u Ni	A
-200(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-201(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-202(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		
-203(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-204(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-205(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-206(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		
-207(LF)	2x30		SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u OVER 50u" / 1. 27u Ni	D
-208(LF)	2x5		RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8	30u" / . 76u GXT/GOLD FLASH	A
-209(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37		1. 06/26. 9		C
-210(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-211(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		
-212(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-213(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-214(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-215(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09		2. 86/72. 6		
65823-216(LF)	2x30	LP	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	30u" / . 76u GXT/GOLD FLASH	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		FCI www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection INCH/MM	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
				angles	0°±2°	scale 5:1	size A	sheet 65823	9 of 21
				dr	J. SHREINER	1/16/90			
				engr	M. SMYK	1/16/90			
				chr	M. SMYK	1/16/90	sheet index	revision sheet	
				appd	M. SMYK	1/16/90			
21									

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.




All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-217(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u" / .76u GXT/GOLD FLASH	A
-218(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-219(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-220(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-221(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-222(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-223(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-224(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-225(LF)	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		D
-226(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8		A
-227(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-228(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-229(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-230(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-231(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-232(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-233(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-234(LF)	2x30	ND	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.675/17.15	3.36/85.3		D
-235(LF)	2x5	STD	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8		A
-236(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-237(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-238(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-239(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-240(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-241(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-242(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
-243(LF)	2x30		RND	3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		D
-244(LF)	2x5		SQ	1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8		A
-245(LF)	2x7			1.460/37.08	.600/15.24	.920/23.37		1.06/26.9		C
-246(LF)	2x8			1.560/39.62	.700/17.78	1.020/25.91		1.16/29.4		D
-247(LF)	2x10			1.760/44.70	.900/22.86	1.220/30.99		1.36/34.5		
-248(LF)	2x13			2.060/52.32	1.200/30.48	1.520/38.61		1.66/42.1		
-249(LF)	2x17			2.460/62.48	1.600/40.64	1.920/48.77		2.06/52.3		
-250(LF)	2x20			2.760/70.10	1.900/48.26	2.220/56.39		2.36/59.9		
-251(LF)	2x25			3.260/82.80	2.400/60.96	2.720/69.09		2.86/72.6		
65823-252(LF)	2x30	STD	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3	30u" / .76u GXT/GOLD FLASH	D

[illegible]




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-253(LF)	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	30u" / . 76u GXT/GOLD FLASH	A
↑ -254(LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-255(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-256(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-257(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-258(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-259(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-260(LF)	2x25		↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-261(LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-262(LF)	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8		A
-263(LF)	2x7		↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-264(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-265(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-266(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-267(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-268(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-269(LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-270(LF)	2x30	LP	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	30u" / . 76u GXT/GOLD FLASH	D
-271(LF)	2x5	ND	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u" . 38u Au OVER 50u" /1. 27u Ni	A
-272(LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-273(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-274(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-275(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-276(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-277(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-278(LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-279(LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-280(LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		A
-281(LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-282(LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-283(LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-284(LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		
-285(LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-286(LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
↓ -287(LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
65823-288(LF)	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	15u" . 38u Au OVER 50u" /1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	
AF					.XXX±.005/.XX±.13			
					.XXX±.0020/.XXX±.051			
				angles	0°±2°	INCH/MM ←→ scale 5:1	product family QUICKIE size dwg no A 65823	
				dr	J. SHREINER 1/16/90			
				enrg	M. SMYK 1/16/90			
				chr	M. SMYK 1/16/90			
				appd	M. SMYK 1/16/90		sheet 11 of 21	
	sheet index	revision sheet						




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-289<LF>	2x5	ND	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u". 38u Au OVER 50u"/1. 27u Ni	A
↑ -290<LF>	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
↑ -291<LF>	2x8	↑	↑	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	↑	1. 16/29. 4	↑	D
↑ -292<LF>	2x10	↑	↑	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	↑	1. 36/34. 5	↑	↑
↑ -293<LF>	2x13	↑	↑	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	↑	1. 66/42. 1	↑	↑
↑ -294<LF>	2x17	↑	↑	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	↑	2. 06/52. 3	↑	↑
↑ -295<LF>	2x20	↑	↑	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	↑	2. 36/59. 9	↑	↑
↑ -296<LF>	2x25	↑	↑	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↑	2. 86/72. 6	↑	↓
↑ -297<LF>	2x30	ND	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	↑	D
↑ -298<LF>	2x5	STD	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8	↑	A
↑ -299<LF>	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
↑ -300<LF>	2x8	↑	↑	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	↑	1. 16/29. 4	↑	D
↑ -301<LF>	2x10	↑	↑	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	↑	1. 36/34. 5	↑	↑
↑ -302<LF>	2x13	↑	↑	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	↑	1. 66/42. 1	↑	↑
↑ -303<LF>	2x17	↑	↑	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	↑	2. 06/52. 3	↑	↑
↑ -304<LF>	2x20	↑	↑	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	↑	2. 36/59. 9	↑	↑
↑ -305<LF>	2x25	↑	↑	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↑	2. 86/72. 6	↑	↓
↑ -306<LF>	2x30	↑	↑	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	↑	D
↑ -307<LF>	2x5	↑	↑	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	↑	A
↑ -308<LF>	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
↑ -309<LF>	2x8	↑	↑	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	↑	1. 16/29. 4	↑	D
↑ -310<LF>	2x10	↑	↑	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	↑	1. 36/34. 5	↑	↑
↑ -311<LF>	2x13	↑	↑	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	↑	1. 66/42. 1	↑	↑
↑ -312<LF>	2x17	↑	↑	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	↑	2. 06/52. 3	↑	↑
↑ -313<LF>	2x20	↑	↑	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	↑	2. 36/59. 9	↑	↑
↑ -314<LF>	2x25	↑	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↑	2. 86/72. 6	↑	↓
↑ -315<LF>	2x30	↑	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	↑	D
↑ -316<LF>	2x5	↑	SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8	↑	A
↑ -317<LF>	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
↑ -318<LF>	2x8	↑	↑	1. 560/39. 62	. 700/17. 78	1. 020/25. 91	↑	1. 16/29. 4	↑	D
↑ -319<LF>	2x10	↑	↑	1. 760/44. 70	. 900/22. 86	1. 220/30. 99	↑	1. 36/34. 5	↑	↑
↑ -320<LF>	2x13	↑	↑	2. 060/52. 32	1. 200/30. 48	1. 520/38. 61	↑	1. 66/42. 1	↑	↑
↑ -311<LF>	2x17	↑	↑	2. 460/62. 48	1. 600/40. 64	1. 920/48. 77	↑	2. 06/52. 3	↑	↑
↑ -312<LF>	2x20	↑	↑	2. 760/70. 10	1. 900/48. 26	2. 220/56. 39	↑	2. 36/59. 9	↑	↑
↑ -313<LF>	2x25	↑	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↑	2. 86/72. 6	↑	↓
65823-313<LF>	2x30	STD	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3	15u". 38u Au OVER 50u"/1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
					angles	0°±2°					
					dr	J. SHREINER	1/16/90				
				enr	M. SMYK	1/16/90	INCH/MM ←→	product family size	QUICKIE dwg no		code —
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
							scale	A	65823		sheet 12 of 21
							5:1				
sheet		revision									
21		index		sheet							



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-325 (LF)	2x5	LP	RND	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 105/2. 67	. 86/21. 8	15u" / . 38u Au OVER 50u" / 1. 27u Ni	A
↑ -326 (LF)	2x7	↑	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9	↑	C
-327 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-328 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-329 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-330 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-331 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-332 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-333 (LF)	2x30			3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3		D
-334 (LF)	2x5			1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 150/3. 81	. 86/21. 8		A
-335 (LF)	2x7			1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-336 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-337 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-338 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-339 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-340 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-341 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
-342 (LF)	2x30		RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 150/3. 81	3. 36/85. 3		D
-343 (LF)	2x5		SQ	1. 260/32. 00	. 400/10. 16	. 720/18. 29	. 675/17. 15	. 86/21. 8		A
-344 (LF)	2x7		↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-345 (LF)	2x8			1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-346 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-347 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-348 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		
-349 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		
-350 (LF)	2x25			3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		
-351 (LF)	2x30	LP	SQ	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 675/17. 15	3. 36/85. 3	15u" / . 38u Au OVER 50u" / 1. 27u Ni	↓
-352 (LF)	2x25	66258	RND	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	. 105/2. 67	2. 86/72. 6	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-353 (LF)	2x7	ND	↑	1. 460/37. 08	. 600/15. 24	. 920/23. 37	↑	1. 06/26. 9		C
-354 (LF)	2x8	↑		1. 560/39. 62	. 700/17. 78	1. 020/25. 91		1. 16/29. 4		D
-355 (LF)	2x10			1. 760/44. 70	. 900/22. 86	1. 220/30. 99		1. 36/34. 5		↑
-356 (LF)	2x13			2. 060/52. 32	1. 200/30. 48	1. 520/38. 61		1. 66/42. 1		↑
-357 (LF)	2x17			2. 460/62. 48	1. 600/40. 64	1. 920/48. 77		2. 06/52. 3		↑
-358 (LF)	2x20			2. 760/70. 10	1. 900/48. 26	2. 220/56. 39		2. 36/59. 9		↑
↓ -359 (LF)	2x25	↓	↓	3. 260/82. 80	2. 400/60. 96	2. 720/69. 09	↓	2. 86/72. 6		↓
65823-360 (LF)	2x30	ND	RND	3. 760/95. 50	2. 900/73. 66	3. 220/81. 79	. 105/2. 67	3. 36/85. 3	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D


*CUSTOMER SPECIAL

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY			www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —	sheet 13 of 21
AF					.XXX±.005/.XX±.13					
					.XXX±.0020/.XXX±.051					
					0°±2°					
				angles	0°±2°	INCH/MM ←→	scale 5:1	A	65823	
				dr	J. SHREINER 1/16/90					
				enr	M. SMYK 1/16/90					
				chr	M. SMYK 1/16/90					
				appd	M. SMYK 1/16/90					
sheet index		revision sheet								
21										



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-361(LF)	2x5	ND	RND	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	30u"/.76u Au OVER 50u"/1.27u Ni	A
↑ -362(LF)	↑	ND	RND	↑	↑	↑	↑	↑	30u"/.76u Au OVER 50u"/1.27u Ni	B
-363(LF)		ND	RND						15"/.38u Au OVER 50u"/1.27u Ni	↑
-364(LF)		ND	RND						30u"/.76u GXT/GOLD FLASH	
-365(LF)		ND	SQ						150u"/3.81u Sn	
-366(LF)		STD	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-367(LF)		STD	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-368(LF)		STD	RND						30u"/.76u GXT/GOLD FLASH	
-369(LF)		STD	SQ						150u"/3.81u Sn	
-370(LF)		LP	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-371(LF)		LP	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-372(LF)		LP	RND				↓		30u"/.76u GXT/GOLD FLASH	
-373(LF)		LP	SQ				.105/2.67		150u"/3.81u Sn	
-374(LF)		ND	RND				.150/3.81		30u"/.76u Au OVER 50u"/1.27u Ni	
-375(LF)		ND	RND				↑		15"/.38u Au OVER 50u"/1.27u Ni	
-376(LF)		ND	RND						30u"/.76u GXT/GOLD FLASH	
-377(LF)		ND	SQ						150u"/3.81u Sn	
-378(LF)		STD	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-379(LF)		STD	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-380(LF)		STD	RND						30u"/.76u GXT/GOLD FLASH	
-381(LF)		STD	SQ						150u"/3.81u Sn	
-382(LF)		LP	RND						30u"/.76u Au OVER 50u"/1.27u Ni	
-383(LF)		LP	RND						15"/.38u Au OVER 50u"/1.27u Ni	
-384(LF)		LP	RND						30u"/.76u GXT/GOLD FLASH	
-385(LF)		LP	SQ				.150/3.81		150u"/3.81u Sn	
-386(LF)		ND	SQ				.675/17.15		30u"/.76u Au OVER 50u"/1.27u Ni	
-387(LF)		ND	↑				↑		15"/.38u Au OVER 50u"/1.27u Ni	
-388(LF)		ND							30u"/.76u GXT/GOLD FLASH	
-389(LF)		ND							150u"/3.81u Sn	
-390(LF)		STD							30u"/.76u Au OVER 50u"/1.27u Ni	
-391(LF)		STD							15"/.38u Au OVER 50u"/1.27u Ni	
-392(LF)		STD							30u"/.76u GXT/GOLD FLASH	
-393(LF)		STD							150u"/3.81u Sn	
-394(LF)		LP							30u"/.76u Au OVER 50u"/1.27u Ni	
↓ -395(LF)	↓	LP	↓	↓	↓	↓	↓	↓	15"/.38u Au OVER 50u"/1.27u Ni	↓
65823-396(LF)	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	30u"/.76u GXT/GOLD FLASH	B

*CUSTOMER SPECIAL

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXX±.0020/.XXX±.051						
				angles	0°±2°			INCH/MM ←→ scale 5:1	product family QUICKIE size dwg no A 65823		code — sheet 14 of 21
				dr	J. SHREINER	1/16/90					
				enr	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
sheet index		revision sheet									
21											



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-397(LF)	2x5	LP	SQ	1.260/32.00	.400/10.16	.720/18.29	.675/17.15	.86/21.8	150u"/3.81u Sn	B
-398(LF)	2x10	66258-001	RND	1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5	30u"/.76u Au OVER 50u"/1.27u Ni	D
-399(LF)	2x5	ND	SQ	1.260/32.00	.400/10.16	.720/18.29	.105/2.67	.86/21.8	15u"/.38u Au OVER 50u"/1.27u Ni	A
-400(LF)		STD					.105/2.67			
-401(LF)		LP					.105/2.67			
-402(LF)		ND					.150/3.81			
-403(LF)		STD					.150/3.81			
-404(LF)		LP					.150/3.81			A
-405(LF)		ND					.105/2.67			B
-406(LF)		STD					.105/2.67			
-407(LF)		LP					.105/2.67			
-408(LF)		ND					.150/3.81			
-409(LF)		STD					.150/3.81			
-410(LF)	2x5	LP		1.260/32.00	.400/10.16	.720/18.29	.150/3.81	.86/21.8		B
-411(LF)	2x7	ND		1.460/37.08	.600/15.24	.920/23.37	.105/2.67	1.06/26.9		C
-412(LF)		STD					.105/2.67			
-413(LF)		LP					.105/2.67			
-414(LF)		ND					.150/3.81			
-415(LF)		STD					.150/3.81			
-416(LF)	2x7	LP		1.460/37.08	.600/15.24	.920/23.37	.150/3.81	1.06/26.9		C
-417(LF)	2x8	ND		1.560/39.62	.700/17.78	1.020/25.91	.105/2.67	1.16/29.4		D
-418(LF)		STD					.105/2.67			
-419(LF)		LP					.105/2.67			
-420(LF)		ND					.150/3.81			
-421(LF)		STD					.150/3.81			
-422(LF)	2x8	LP		1.560/39.62	.700/17.78	1.020/25.91	.150/3.81	1.16/29.4		
-423(LF)	2x10	ND		1.760/44.70	.900/22.86	1.220/30.99	.105/2.67	1.36/34.5		
-424(LF)		STD					.105/2.67			
-425(LF)		LP					.105/2.67			
-426(LF)		ND					.150/3.81			
-427(LF)		STD					.150/3.81			
-428(LF)	2x10	LP		1.760/44.70	.900/22.86	1.220/30.99	.150/3.81	1.36/34.5		
-429(LF)	2x13	ND		2.060/52.32	1.200/30.48	1.520/38.61	.105/2.67	1.66/42.1		
-430(LF)		STD					.105/2.67			
-431(LF)		LP					.105/2.67			
65823-432(LF)	2x13	ND	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1	15u"/.38u Au OVER 50u"/1.27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —	
AF					.XXX±.005/.XX±.13					
					.XXX±.0020/.XXX±.051					
				angles	0°±2°	INCH/MM ←→	scale 5:1	size A	sheet 15 of 21	
				dr	J. SHREINER					1/16/90
				enr	M. SMYK					1/16/90
				chr	M. SMYK	1/16/90				
				appd	M. SMYK	1/16/90				
sheet index		revision sheet								
21										



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-433(LF)	2x13	STD	SQ	2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1	15u" / .38u Au OVER 50u" / 1.27u Ni	D
-434(LF)	2x13	LP		2.060/52.32	1.200/30.48	1.520/38.61	.150/3.81	1.66/42.1		
-435(LF)	2x17	ND		2.460/62.48	1.600/40.64	1.920/48.77	.105/2.67	2.06/52.3		
-436(LF)		STD					.105/2.67			
-437(LF)		LP					.105/2.67			
-438(LF)		ND					.150/3.81			
-439(LF)		STD					.150/3.81			
-440(LF)	2x17	LP		2.460/62.48	1.600/40.64	1.920/48.77	.150/3.81	2.06/52.3		
-441(LF)	2x20	ND		2.760/70.10	1.900/48.26	2.220/56.39	.105/2.67	2.36/59.9		
-442(LF)		STD					.105/2.67			
-443(LF)		LP					.105/2.67			
-444(LF)		ND					.150/3.81			
-445(LF)		STD					.150/3.81			
-446(LF)	2x20	LP		2.760/70.10	1.900/48.26	2.220/56.39	.150/3.81	2.36/59.9		
-447(LF)	2x25	ND		3.260/82.80	2.400/60.96	2.720/69.09	.105/2.67	2.86/72.6		
-448(LF)		STD					.105/2.67			
-449(LF)		LP					.105/2.67			
-450(LF)		ND					.150/3.81			
-451(LF)		STD					.150/3.81			
-452(LF)	2x25	LP		3.260/82.80	2.400/60.96	2.720/69.09	.150/3.81	2.86/72.6		
-453(LF)	2x30	ND		3.760/95.50	2.900/73.66	3.220/81.79	.105/2.67	3.36/85.3		
-454(LF)		STD					.105/2.67			
-455(LF)		LP					.105/2.67			
-456(LF)		ND					.150/3.81			
-457(LF)		STD					.150/3.81			
-458(LF)	2x30	LP	SQ	3.760/95.50	2.900/73.66	3.220/81.79	.150/3.81	3.36/85.3		
-459(LF)	2x12	ND	RND	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.6		
-460(LF)		STD								
-461(LF)		LP							15u" / .38u Au OVER 50u" / 1.27u Ni	
-462(LF)		ND							30u" / .76u Au OVER 50u" / 1.27u Ni	
-463(LF)		STD							30u" / .76u Au OVER 50u" / 1.27u Ni	
-464(LF)		LP							30u" / .76u Au OVER 50u" / 1.27u Ni	
-465(LF)		ND							30u" / .76u GXT/GOLD FLASH	
-466(LF)		STD							30u" / .76u GXT/GOLD FLASH	
-467(LF)		LP	RND						30u" / .76u GXT/GOLD FLASH	
65823-468(LF)	2x12	ND	SQ	1.960/49.80	1.100/27.94	1.420/36.07	.105/2.67	1.56/39.6	150u" / 3.81u Sn	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	FCI www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection INCH/MM	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13				
					.XXX±.0020/.XXX±.051				
					angles 0°±2°				
				dr	J. SHREINER	1/16/90	scale 5:1	product family QUICKIE	
				engr	M. SMYK	1/16/90			size A
				chr	M. SMYK	1/16/90			
				appd	M. SMYK	1/16/90			
sheet index		revision sheet						code -	
21								sheet 16 of 21	




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-469(LF)	2x12	STD	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 105/2. 67	1. 56/39. 62	150u"/3. 81u TIN	D
-470(LF)		LP	SQ				. 105/2. 67		150u"/3. 81u TIN	
-471(LF)		ND	RND				. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-472(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-473(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-474(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-475(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-476(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-477(LF)		ND							30u"/. 76u GXT/GOLD FLASH	
-478(LF)		STD							30u"/. 76u GXT/GOLD FLASH	
-479(LF)		LP	RND						30u"/. 76u GXT/GOLD FLASH	
-480(LF)		ND	SQ						150u"/3. 81u TIN	
-481(LF)		STD							150u"/3. 81u TIN	
-482(LF)		LP					. 150/3. 81		150u"/3. 81u TIN	
-483(LF)		ND					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-484(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-485(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-486(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-487(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-488(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-489(LF)		ND							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-490(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-491(LF)		LP					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-492(LF)		ND					. 675/17. 15		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-493(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-494(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-495(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-496(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-497(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-498(LF)		ND							30u"/. 76u GXT/GOLD FLASH	
-499(LF)		STD							30u"/. 76u GXT/GOLD FLASH	
-500(LF)		LP							30u"/. 76u GXT/GOLD FLASH	
-501(LF)		ND							150u"/3. 81u TIN	
-502(LF)		STD							150u"/3. 81u TIN	
-503(LF)	2x12	LP	SQ	1. 960/49. 80	1. 100/27. 94	1. 420/36. 07	. 675/17. 15	1. 56/39. 62	150u"/3. 81u TIN	
65823-504(LF)	2x15	ND	RND	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 105/2. 67	1. 86/47. 24	15u"/. 38u Au OVER 50u"/1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified				CUSTOMER COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3			projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13						
					.XXXX±.0020/.XXX±.051						
					0°±2°						
				angles				INCH/MM ←→	product family QUICKIE		code —
				dr	J. SHREINER	1/16/90					
				enrg	M. SMYK	1/16/90					
				chr	M. SMYK	1/16/90					
				appd	M. SMYK	1/16/90					
							scale	5:1		sheet 17 of 21	
sheet index				revision sheet							
21											





	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-505(LF)	2x15	STD	RND	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 105/2. 67	1. 86/47. 2	15u"/. 38u Au OVER 50u"/1. 27u Ni	D
-506(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-507(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-508(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-509(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-510(LF)		ND							30u"/. 76u GXT GOLD FLASH	
-511(LF)		STD							30u"/. 76u GXT GOLD FLASH	
-512(LF)		LP	RND						30u"/. 76u GXT GOLD FLASH	
-513(LF)		ND	SQ						150u"/3. 81u TIN	
-514(LF)		STD	SQ						150u"/3. 81u TIN	
-515(LF)		LP	SQ				. 105/2. 67		150u"/3. 81u TIN	
-516(LF)		ND	RND				. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-517(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-518(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-519(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-520(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-521(LF)		LP							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-522(LF)		ND							30u"/. 76u GXT GOLD FLASH	
-523(LF)		STD							30u"/. 76u GXT GOLD FLASH	
-524(LF)		LP	RND						30u"/. 76u GXT GOLD FLASH	
-525(LF)		ND	SQ						150u"/3. 81u TIN	
-526(LF)		STD							150u"/3. 81u TIN	
-527(LF)		LP					. 150/3. 81		150u"/3. 81u TIN	
-528(LF)		ND					. 105/2. 67		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-529(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-530(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-531(LF)		ND							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-532(LF)		STD							30u"/. 76u Au OVER 50u"/1. 27u Ni	
-533(LF)		LP					. 105/2. 67		30u"/. 76u Au OVER 50u"/1. 27u Ni	
-534(LF)		ND					. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-535(LF)		STD					. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-536(LF)		LP					. 150/3. 81		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-537(LF)		ND					. 675/17. 15		15u"/. 38u Au OVER 50u"/1. 27u Ni	
-538(LF)		STD							15u"/. 38u Au OVER 50u"/1. 27u Ni	
-539(LF)		LP							15u"/. 38u Au OVER 50u"/1. 27u Ni	
65823-540(LF)	2x15	ND	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 675/17. 15	1. 86/47. 2	30u"/. 76u Au OVER 50u"/1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —
AF					.XXX±.005/.XX±.13				
					.XXXX±.0020/.XXX±.051				
				angles	0°±2°	INCH/MM ←→	scale 5:1	size A	sheet 18 of 21
				dr	J. SHREINER 1/16/90				
				enrg	M. SMYK 1/16/90				
				chr	M. SMYK 1/16/90	A	65823		
				appd	M. SMYK 1/16/90				
21	sheet index	revision sheet							




	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM E	TERMINAL PLATING NOTE 12	STYLE
65823-541(LF)	2x15	STD	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/48. 69	. 675/17. 15	1. 86/47. 2	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D
-542(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-543(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-544(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-545(LF)		LP							30u" / . 76u GXT/GOLD FLASH	
-546(LF)		ND							150u" / 3. 81u TIN	
-547(LF)		STD							150u" / 3. 81u TIN	
-548(LF)	2x15	LP	SQ	2. 260/57. 40	1. 400/35. 56	1. 720/43. 69	. 675/17. 15	1. 86/47. 2	150u" / 3. 81u TIN	
-549(LF)	2x22	ND	RND	2. 960/75. 20	2. 100/53. 34	2. 420/61. 47	. 105/2. 67	2. 56/65. 0	15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-550(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-551(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-552(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-553(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-554(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-555(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-556(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-557(LF)		LP	RND						30u" / . 76u GXT/GOLD FLASH	
-558(LF)		ND	SQ						150u" / 3. 81u TIN	
-559(LF)		STD	SQ						150u" / 3. 81u TIN	
-560(LF)		LP	SQ				. 105/2. 67		150u" / 3. 81u TIN	
-561(LF)		ND	RND				. 150/3. 81		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-562(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-563(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-564(LF)		ND							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-565(LF)		STD							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-566(LF)		LP							30u" / . 76u Au OVER 50u" / 1. 27u Ni	
-567(LF)		ND							30u" / . 76u GXT/GOLD FLASH	
-568(LF)		STD							30u" / . 76u GXT/GOLD FLASH	
-569(LF)		LP	RND						30u" / . 76u GXT/GOLD FLASH	
-570(LF)		ND	SQ						150u" / 3. 81u TIN	
-571(LF)		STD							150u" / 3. 81u TIN	
-572(LF)		LP					. 150/3. 81		150u" / 3. 81u TIN	
-573(LF)		ND					. 105/2. 67		15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-574(LF)		STD							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
-575(LF)		LP							15u" / . 38u Au OVER 50u" / 1. 27u Ni	
65823-576(LF)	2x22	ND	SQ	2. 960/75. 20	2. 100/53. 34	2. 420/61. 47	. 105/2. 67	2. 56/65. 0	30u" / . 76u Au OVER 50u" / 1. 27u Ni	D

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY		 www.fciconnect.com		
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3	projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE	product family QUICKIE	code —	
AF					.XXX±.005/.XX±.13					
					.XXXX±.0020/.XXX±.051					
				angles	0°±2°	INCH/MM 	scale 5:1	A	sheet 19 of 21	
				dr	J. SHREINER					1/16/90
				enr	M. SMYK					1/16/90
				chr	M. SMYK	1/16/90				
				appd	M. SMYK	1/16/90				
sheet index		revision sheet								
21										



	SIZE	LATCHES NOTE 7	PIN SHAPE	DIM A	DIM B	DIM C	DIM D	DIM F	TERMINAL PLATING NOTE 12	STYLE
65823-609 (LF)	2X5	-	RND	32.00	10.16	18.29	2.67	7.24	50u"/1.27 u Au OVER 50u"/1.27u Ni	A
-610 (LF)	2X5	-	↑	32.00	10.16	18.29	↑	↑	↑	B
-611 (LF)	2X7	-	↑	37.00	15.24	23.37	↑	↑	↑	C
-612 (LF)	2X8	-	↑	39.60	17.18	25.91	↑	↑	↑	D
-613 (LF)	2X10	-	↑	44.70	22.86	30.99	↑	↑	↑	↑
-614 (LF)	2X13	-	↑	52.30	30.48	38.61	↑	↑	↑	↑
-615 (LF)	2X17	-	↑	62.40	40.64	48.77	↑	↑	↑	↑
-616 (LF)	2X20	-	↑	70.10	48.26	56.39	↑	↑	↑	↑
-617 (LF)	2X25	-	↑	82.80	60.96	69.09	↑	↑	↑	↓
-618 (LF)	2X30	-	↑	95.50	76.66	81.79	↑	↑	↑	D
-619 (LF)	2X5	STD	↑	32.00	10.16	18.29	↑	↑	↑	A
-620 (LF)	2X5	↑	↑	32.00	10.16	18.29	↑	↑	↑	B
-621 (LF)	2X7	↑	↑	37.00	15.24	23.37	↑	↑	↑	C
-622 (LF)	2X8	↑	↑	39.60	17.18	25.91	↑	↑	↑	D
-623 (LF)	2X10	↑	↑	44.70	22.86	30.99	↑	↑	↑	↑
-624 (LF)	2X13	↑	↑	52.30	30.48	38.61	↑	↑	↑	↑
-625 (LF)	2X17	↑	↑	62.40	40.64	48.77	↑	↑	↑	↑
-626 (LF)	2X20	↑	↑	70.10	48.26	56.39	↑	↑	↑	↑
-627 (LF)	2X25	↑	↑	82.80	60.96	69.09	↑	↑	↑	↑
-628 (LF)	2X30	STD	RND	95.50	76.66	81.79	2.67	7.24	50u"/1.27 u Au OVER 50u"/1.27u Ni	D

mat'l. code				tolerances unless otherwise specified			CUSTOMER COPY		 www.fciconnect.com	
ltr	ecn no	dr	date	linear	.XX±.01/.X±.3		projection 	title HEADER, QUICKIE SEA, HORSE, RIGHT ANGLE		
AF					.XXX±.005/.XX±.13					
					.XXXX±.0020/.XXX±.051					
				angles	0°±2°		 INCH/MM	product family		code
				dr	J. SHREINER	1/16/90		QUICKIE		—
				engr	M. SMYK	1/16/90		size dwg no		
				chr	M. SMYK	1/16/90		scale		sheet
				appd	M. SMYK	1/16/90		5:1		21 of 21
	sheet index		revision sheet							
21										