

C515

5 mm x 15 mm Axial-leaded, time-delay, glass tube fuses



RoHS

Product features

- Axial-leaded, time-delay
- 5 x 15mm physical size
- Nickel-plated brass endcap construction
- Leads are tin coated
- Optional sleeve is flexible fluoropolymer (UL Flammability rating VW-1).
- UL Listed product meets standard UL 248-14

Agency information

- UL Listed Card: C515 125mA-250mA and 375mA-3A (Guide JDYX, File E19180)
- UL Recognized Card: C515 350mA, and 3.5A-7A (Guide JDYX2, File E19180)
- CSA Certification Card: C515 125mA-250mA and 375mA-3A (Class 1422-01, 53787)

Electrical Characteristics		
Rated Current	Amp Rating	Opening Time
125mA - 250mA	135%	60 minutes max.
	200%	3 seconds min. 120 seconds max.
350mA	100%	4 hours min.
	470mA	30 minutes max.
	600mA	90 seconds max.
	2A	2 seconds max.
375mA - 7A	6A	500 milliseconds max.
	135%	60 minutes max.
	200%	3 seconds min. 120 seconds max.

Ordering

- Specify product code
- Insert packaging code prefix before part number.
E.g., BK (or TR2)/C515-2-R
- With TR2 packaging code, lead wire length is 20.3mm Specify option code, if desired
- For insulation sleeve, insert "S" after part series.
E.g., BK/C515S-2-R

Product Code	Voltage Rating Vac	Specifications			Typical DC Cold Resistance* (Ω)	Typical Melting I ² t**	Max Voltage Drop (mV)***
		Interrupting Rating (amps)					
		600Vac	250Vac	125Vac			
C515-125-R	250	-	35	10000	4.72	0.101	770
C515-250-R	250	-	35	10000	1.32	0.467	430
C515-350-R	250	25	35	10000	1.04	1.169	530
C515-375-R	250	-	35	10000	0.81	1.531	470
C515-500-R	250	-	35	10000	0.54	2.280	440
C515-600-R	250	-	35	10000	0.38	6.982	350
C515-750-R	250	-	35	10000	0.26	9.162	310
C515-800-R	250	-	35	10000	0.23	10.544	260
C515-1-R	250	-	35	10000	0.14	14.289	230
C515-1.25-R	250	-	100	10000	0.13	22.961	220
C515-1.5-R	250	-	100	10000	0.100	31.989	240
C515-1.6-R	250	-	100	10000	0.090	35.156	200
C515-2-R	250	-	100	10000	0.059	60.256	170
C515-2.25-R	250	-	100	10000	0.057	97.724	180
C515-2.5-R	250	-	100	10000	0.046	78.163	190
C515-3-R	250	-	100	10000	0.035	80.426	150
C515-3.5-R	125	-	-	400	0.028	149.279	130
C515-4-R	125	-	-	400	0.023	233.346	130
C515-5-R	125	-	-	400	0.019	354.813	150
C515-6-R	125	-	-	400	0.014	471.360	125
C515-7-R	125	-	-	400	0.013	710.500	100

*DC Cold Resistance (Measured at <10% of rated current)


**Typical Melting I²t (A²Sec) (Minimum I²t at 10 times rated current)

***Typical Voltage Drop (Voltage drop was measured at 25°C ambient temperature at rated current)




Powering Business Worldwide

Dimensions mm
Drawing Not to Scale

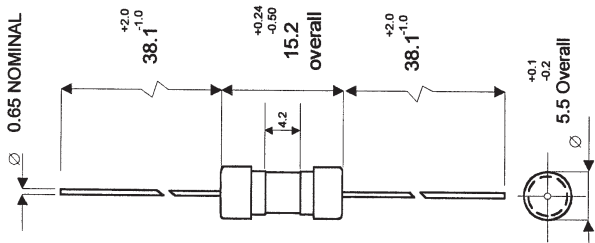

Time-Current Curves

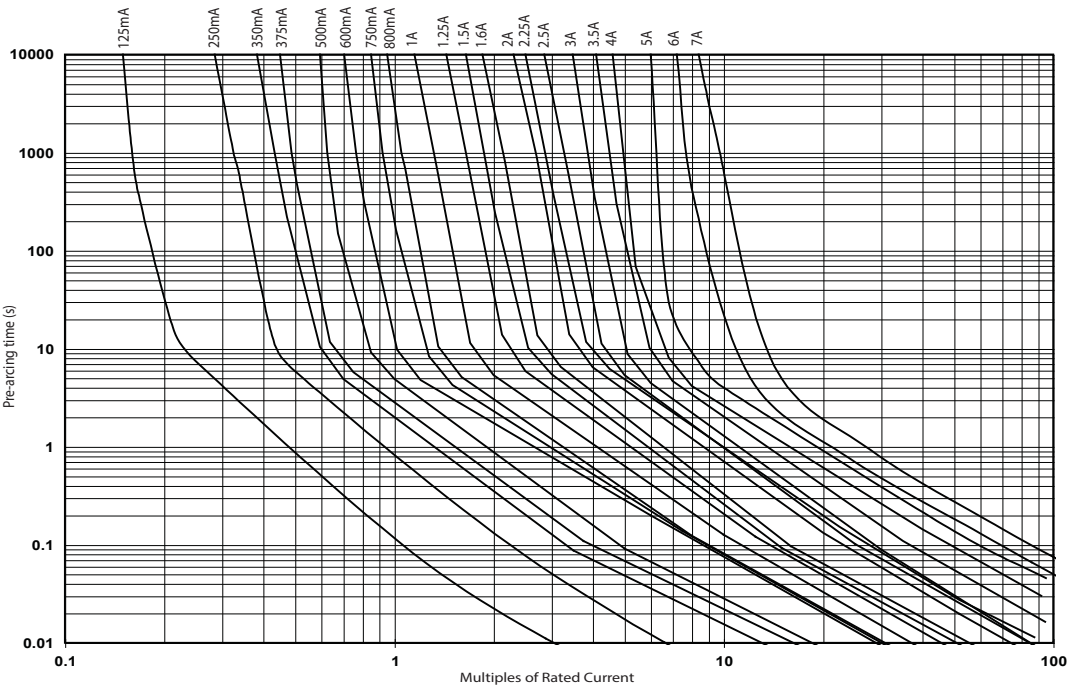

Packaging Code	
Packaging Code Prefix	Description
BK	100 fuses packed into a cardboard carton
TR2	1500 fuses packed into tape on a reel (20.3mm lead wire length)

Option Code	
Option Code	Description
S	Insulation Sleeve

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/electronics

© 2017 Eaton
All Rights Reserved
Printed in USA
Publication No. 2006 BU-SB09716
May 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

[BK/C515-7A](#) [BK/C515-5A](#) [BK/C515-1A](#) [BK/C515-500MA](#) [BK/C515-6A](#) [BK/C515-800MA](#) [BK/C515-2A](#) [BK/C515-600MA](#) [BK/C515-3A](#) [BK/C515-3-R](#) [BK/C515-350MA](#) [BK/C515-2.5A](#) [BK/C515-1.25-R](#) [BK/C515-1.5-R](#) [BK/C515-125-R](#) [BK/C515-1-R](#) [BK/C515-2.5-R](#) [BK/C515-250-R](#) [BK/C515-2-R](#) [BK/C515-3.5-R](#) [BK/C515-350-R](#) [BK/C515-375-R](#) [BK/C515-4-R](#) [BK/C515-500-R](#) [BK/C515-5-R](#) [BK/C515-600-R](#) [BK/C515-750-R](#) [BK-C515-2-25-R](#) [TR2-C515-1-25A](#) [TR2-C515-1-25AL](#) [TR2-C515-1-5A](#) [TR2-C515-1-5A-L](#) [TR2-C515-1-5-R](#) [TR2-C515-1-6A-L](#) [TR2-C515-1-6-R](#) [TR2-C515-2-25A](#) [TR2-C515-2-25AL](#) [TR2-C515-2-25-R](#) [TR2-C515-2-5A](#) [TR2-C515-2-5A-L](#) [TR2-C515-2-5-R](#) [TR2-C515-3-5A](#) [TR2-C515-3-5A-L](#) [TR2-C515-3-5-R](#) [TR2-C515S-1-25A](#) [TR2-C515S-1-5A](#) [TR2-C515S-1-5-R](#) [TR2-C515S-1-6-R](#) [TR2-C515S-2-25R](#) [TR2-C515S-2-5-R](#) [TR2-C515S-3-5-R](#) [TR-C515S-1-5A](#) [BK-C515-1-6-R](#) [BK-C515-7-R](#) [BK-C515S-1-25A](#) [BK-C515S-125-R](#) [BK-C515S-1-5-R](#) [BK-C515S-1-6-R](#) [BK-C515S-1A](#) [BK-C515S-1-R](#) [BK-C515S-2-25-R](#) [BK-C515S-250MA](#) [BK-C515S-250-R](#) [BK-C515S-2-5-R](#) [BK-C515S-2-R](#) [BK-C515S-350MA](#) [BK-C515S-350-R](#) [BK-C515S-3-5-R](#) [BK-C515S-375-R](#) [BK-C515S-3A](#) [BK-C515S-3-R](#) [BK-C515S-4-R](#) [BK-C515S-500-R](#) [BK-C515S-5-R](#) [BK-C515S-600MA](#) [BK-C515S-600-R](#) [BK-C515S-6-R](#) [BK-C515S-750-R](#) [BK-C515S-7-R](#) [BK-C515S-800-R](#) [TR2-C515-125MA](#) [TR2-C515-125MAL](#) [TR2-C515-125-R](#) [TR2-C515-1A](#) [TR2-C515-1A-L](#) [TR2-C515-1-R](#) [TR2-C515-250MA](#) [TR2-C515-250MAL](#) [TR2-C515-250-R](#) [TR2-C515-2A](#) [TR2-C515-2A-L](#) [TR2-C515-2-R](#) [TR2-C515-350MA](#) [TR2-C515-350MAL](#) [TR2-C515-350-R](#) [TR2-C515-375MA](#) [TR2-C515-375MAL](#) [TR2-C515-375-R](#) [TR2-C515-3A](#) [TR2-C515-3A-L](#)