THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	S	REV PER EC 0G3C-0495-03	09MAR03	MB	JG
	S1	REVISED PER ECO-09-021826	6JAN10	KK	AEG

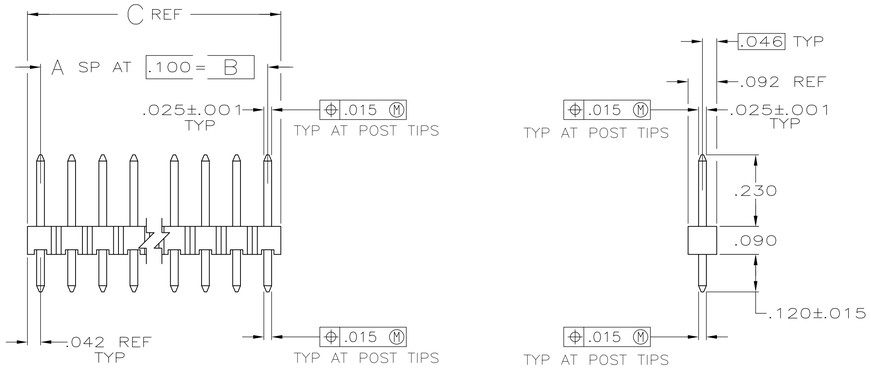

1. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
2. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

3. PARTS PACKAGED IN TUBES.
4. .000100–.000200 MATTE TIN–LEAD OVER .000050 NICKEL.
5. .000100–.000200 BRIGHT TIN OVER .000050 NICKEL.
6. PRELIMINARY PART – NOT RELEASED FOR PRODUCTION.
7. HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR–BLACK.
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

6	5	.484	.400	4	5	5–103327–4
6	5	3.584	3.500	35	36	5–103327–3
6	5	1.584	1.500	15	16	5–103327–2
	5	.384	.300	3	4	5–103327–1
OBSOLETE	5	1.384	1.300	13	14	5–103327–0
	5	3.984	3.900	39	40	4–103327–9
6	5	.984	.900	9	10	4–103327–8
OBSOLETE	5	.784	.700	7	8	4–103327–7
	5	.584	.500	5	6	4–103327–6
	5	.284	.200	2	3	4–103327–5
	5	.184	.100	1	2	4–103327–4
	5	.084	——	——	1	4–103327–3
3 SUPERSEDED BY 1–103327–2	4	1.184	1.100	11	12	4–103327–2
3 SUPERSEDED BY 1–103327–1	4	1.084	1.000	10	11	4–103327–1
	4	3.984	3.900	39	40	4–103327–0
8 OBSOLETE	4	3.884	3.800	38	39	3–103327–9
8 OBSOLETE	4	3.784	3.700	37	38	3–103327–8
8 OBSOLETE	4	3.684	3.600	36	37	3–103327–7
	4	3.584	3.500	35	36	3–103327–6
8 OBSOLETE	4	3.484	3.400	34	35	3–103327–5
8 OBSOLETE	4	3.384	3.300	33	34	3–103327–4
8 OBSOLETE	4	3.284	3.200	32	33	3–103327–3
8 OBSOLETE	4	3.184	3.100	31	32	3–103327–2
8 OBSOLETE	4	3.084	3.000	30	31	3–103327–1
8 OBSOLETE	4	2.984	2.900	29	30	3–103327–0
8 OBSOLETE	4	2.884	2.800	28	29	2–103327–9
8 OBSOLETE	4	2.784	2.700	27	28	2–103327–8
8 OBSOLETE	4	2.684	2.600	26	27	2–103327–7
8 OBSOLETE	4	2.584	2.500	25	26	2–103327–6
8 OBSOLETE	4	2.484	2.400	24	25	2–103327–5
8 OBSOLETE	4	2.384	2.300	23	24	2–103327–4
8 OBSOLETE	4	2.284	2.200	22	23	2–103327–3
8 OBSOLETE	4	2.184	2.100	21	22	2–103327–2
8 OBSOLETE	4	2.084	2.000	20	21	2–103327–1
8 OBSOLETE	4	1.984	1.900	19	20	2–103327–0
8 OBSOLETE	4	1.884	1.800	18	19	1–103327–9
	4	1.784	1.700	17	18	1–103327–8
8 OBSOLETE	4	1.684	1.600	16	17	1–103327–7
	4	1.584	1.500	15	16	1–103327–6
8 OBSOLETE	4	1.484	1.400	14	15	1–103327–5
	4	1.384	1.300	13	14	1–103327–4
8 OBSOLETE	4	1.284	1.200	12	13	1–103327–3
8 SUPERSEDED BY 6–146278–2	4	1.184	1.100	11	12	1–103327–2
	4	1.084	1.000	10	11	1–103327–1
	4	.984	.900	9	10	1–103327–0
8 SUPERSEDED BY 5–146278–9	4	.884	.800	8	9	103327–9
	4	.784	.700	7	8	103327–8
	4	.684	.600	6	7	103327–7
	4	.584	.500	5	6	103327–6
	4	.484	.400	4	5	103327–5
	4	.384	.300	3	4	103327–4
	4	.284	.200	2	3	103327–3
	4	.184	.100	1	2	103327–2
	4	.084	——	——	1	103327–1
	PLATING	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: PHOSPHOR BRONZE 2

FINISH: SEE TABLE

DWN J.MARTINELLI 10/15/92
CHK JOHN KNITTLE 23NOV92
APVD B. FLINCHBAUGH 23NOV92

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

Tyco Electronics — Tyco Electronics Corporation, Harrisburg, PA 17105

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-103327	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV S1