




REVISIONS				
REV	DATE	DESCRIPTION	CHG	APPR

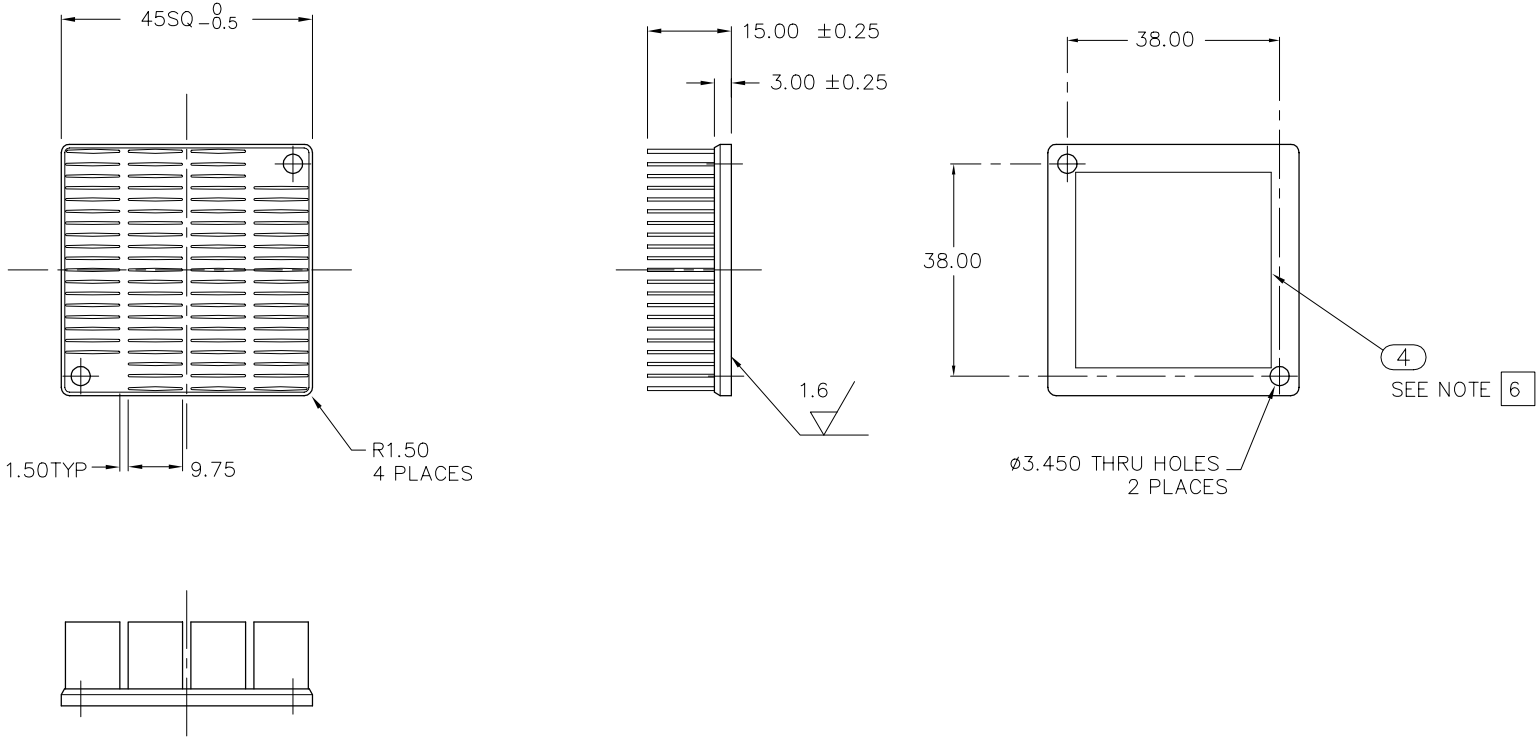

- NOTES : UNLESS OTHERWISE SPECIFIED
- INTERPRET DIMENSIONS AND TOLERANCES PER ANSI Y14.5M
 - ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
 - TOLERANCES :
.XX ±0.254 [.010]
.XXX ±0.127 [.005]
ANGLES ± 1°
 - REMOVE ALL BURRS AND BREAK SHARP EDGES.
UNSPECIFIED CORNER R0.5 MAX OR C0.5 MAX
 - A BEND OF THE FIN: THE FINS MUST NOT CONTACT.
 - PEEL ONE SIDE OF LINER FROM THERMAL PAD.
ADHERE IN APPROXIMATE POSITION OF THE BASE SURFACE CENTER

ASSEMBLY IMAGE (REFERENCE ONLY / DO NOT SCALE)

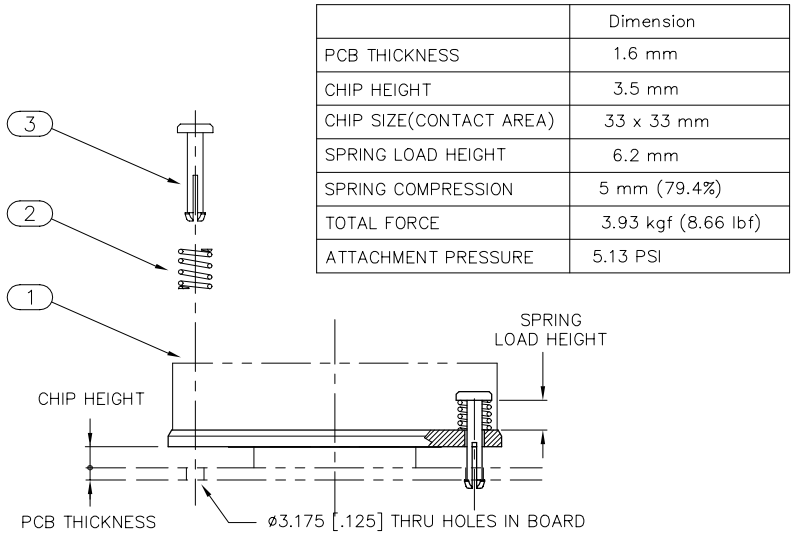

④	S001Z00L	<THERMAL INTERFACE> T-PCM905C-35S	Laird T-PCM905C 35 x 35 mm	1
③	S001YZ0M	<PUSH PIN> PIP3.175x14.3	BRASS (ROHS COMPLIANT) C6801 SAN-ETU METALS BZ5 OR EQUIVALENT	2
②	S001YJ07	<SPRING>	OUTSIDE DIA: 5.3 mm WIRE DIA: .65 mm FREE LENGTH: 11.2 mm SPRING RATE: 3.85 (N/mm2) SOLID HEIGHT: 4.9 mm MATERIAL: Music Wire OR EQUIVALENT	2
①	-----	<HEATSINK> <--HEATSINKNAME-->	UB45 SERIES HEAT SINK MODIFIED 6063 ALUMINUM BLACK ANODIZE	1
ITEM	PART NO.	PART NAME	REMARK	Q'TY
ALPHA CO.,LTD.			CSTM'R'S PART NO.	
		MATERIAL	NAME <--HEATSINK ASSEMBLY NAME-->	
SCALE 1 : 1		APPR & CHCK -----	PART NO. & DWG NO. -----	
DATE 2008.05.21		DSGN & DWG -----	REV	
		RDCTN:	LOFF:	