


Long-distance Capacitive Proximity Sensor

E2K-C

Capacitive Proximity Sensor
with Adjustable Sensitivity

- Detects both metallic and non-metallic objects (glass, lumber, water, oil, plastic, etc.) without direct contact.
- DC models acquire CE marking

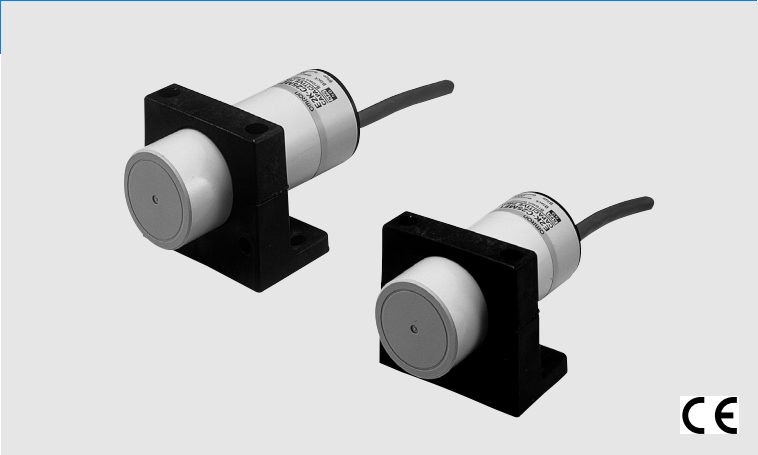


Ordering Information

Sensors

Shape	Sensing distance	Model		
		Output specifications	Operating status	
			NO	NC
Unshielded  34 dia.	 3 to 25mm	DC 3-wire NPN DC 3-wire PNP	E2K-C25ME1 E2-KC25MF1	E2K-C25ME2 E2K-C25MF2

Accessories (Order Separately)

Mounting Brackets

Shape	Model	Quantity	Remarks
	Y92E-A34	1	Supplied with the product.

E2K-C


Rating/Performance

Item		Model	E2K-C25M□1	E2K-C25M□2
Sensing distance *			25 mm	
Sensing distance adjustable range			3 to 25 mm	
Sensing object			Conductors and dielectrics	
Standard sensing object			with grounded metal: 50 x 50 x 1t mm	
Differential distance			15% max. of sensing distance (when adjusted to 25 mm ±10% with standard object)	
Response frequency			70 Hz	
Power supply(Operating voltage range)			12 to 24 VDC, ripple (p-p): 10% max.,(10 to 40 VDC)	
Current consumption			E models: 10 mA max. at 12 VDC, 16 mA max. at 24 VDC	
Leakage current			Y models: 1 mA max. at 100 VAC (50/60 Hz) with output turned OFF., 2 mA max. at 200 VAC (50/60 Hz) with output turned OFF.	
Control output	Switching capacity		200 mA max.	
	Residual voltage		2 V max. (under load current of 200 mA with cable length of 2 m)	
Indicator lamp			Detection indicator (red LED)	
Operating status (with sensing object approaching)			E1, Y1 models: NO E2, Y2 models: NC	
Protective circuits			Reverse connection protection, surge absorber	
Ambient temperature			Operating/Storage: -25°C to 70°C (with no icing or condensation)	
Ambient humidity			Operating/Storage: 35% to 95%RH (with no condensation)	
Temperature influence			±15%max. of sensing distance at 23° within temperature range -10°C to 55°C	
Voltage influence			±2% max. of sensing distance at a voltage between 85% and 115% of the rated power supply voltage	
Insulation resistance			50 M min. (at 500 VDC) between current carry parts and case	
Dielectric strength			1000 VAC 50/60 Hz for 1 min between energized part and case	
Vibration resistance			10 to 55 Hz, 1.5 mm double amplitude for 2 hours each in X, Y, and Z directions	
Shock resistance			Destruction: 500 m/s ² for 10 times each in X, Y, and Z directions	
Protective structure			IEC 60529 IP66	
Connection method			Pre-wired models (standard length: 2 m)	
Weight (Packed state)			Approx. 200 g	
Material	Case		Heat-resistant ABS resin	
	Sensing surface			
Accessories			Mounting bracket, instruction manual	

* The set distances are sensing distances applicable to standard sensing objects. Refer to Engineering Data for sensing distances applicable to other types of objects.

Characteristic data (typical)

Sensing Distance Change by Sensing Object (Typical)

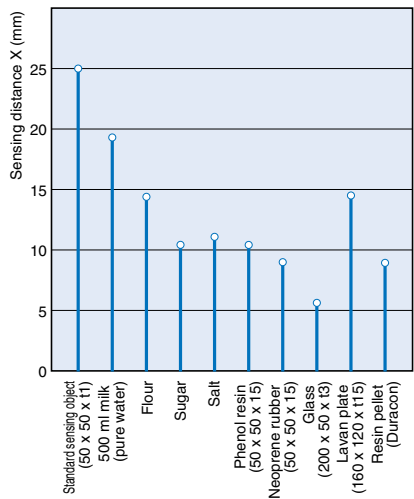

Output Circuit Diagram


DC 3-wire Models

Operating status	Model	Timing chart	Output circuit
NO	E2K-C25ME1	Sensing object: Yes (High), No (Low) Load (between brown and black): Operates (High), Releases (Low) Output voltage (between black and blue): H (High), L (Low) Operation indicator (red): ON (High), OFF (Low)	* 1. 200 mA max. (load current) * 2. When a transistor is connected
NC	E2K-C25ME2	Sensing object: Yes (High), No (Low) Load (between brown and black): Operates (Low), Releases (High) Output voltage (between black and blue): H (High), L (Low) Operation indicator (red): ON (High), OFF (Low)	* 1. 200 mA max. (load current) * 2. When a transistor is connected
NO	E2K-C25MF1	Sensing object: Yes (High), No (Low) Load (between brown and black): Operates (High), Releases (Low) Output voltage (between black and blue): H (High), L (Low) Operation indicator (red): ON (High), OFF (Low)	* 1. Maximum load current: 200 mA * 2. Current flows in this direction if the circuit incorporates the transistor.
NC	E2K-C25MF2	Sensing object: Yes (High), No (Low) Load (between brown and black): Operates (Low), Releases (High) Output voltage (between black and blue): H (High), L (Low) Operation indicator (red): ON (High), OFF (Low)	* 1. Maximum load current: 200 mA * 2. Current flows in this direction if the circuit incorporates the transistor.

Operation


Sensitivity adjustment

Remove the rear rubber cap of the E2K-C and turn the potentiometer in the hole to adjust the sensitivity of the E2K-C.

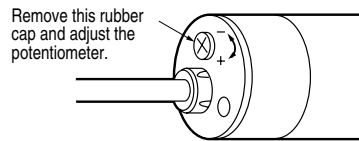

The sensing distance increases by turning the potentiometer clockwise and decreases by turning the potentiometer counterclockwise. The potentiometer can make 15 ± 3 valid turns and then make slip turns because the potentiometer does not have a stopper. The slip turns will not, however, damage the potentiometer.


1. Slowly turn the potentiometer clockwise until the E2K-C turns on with no sensing object.




2. Turn the potentiometer counterclockwise until the E2K-C turns off with the sensing object located within the sensing distance.



3. The E2K-C will be in stable operation if there is a difference of 1.5 turns or more between the points the E2K-C is turned on and off, otherwise the E2K-C will not be in stable operation.



4. Set the potentiometer midway between the two points.



5. If the distance of each sensing object varies, take step 2 with the sensing object located at the farthest sensing distance to be applied.

Precautions


Correct Use

Design

Effects of Surrounding Metal

During Proximity Sensor installation provide a distance of 80 mm min. from the surrounding metal objects to prevent the Sensor from being affected by metal objects other than the sensing object.


If installing the Sensor with the L-shaped mounting bracket, provide a distance of 20 mm min. between the face of the sensing head and the mounting bracket.

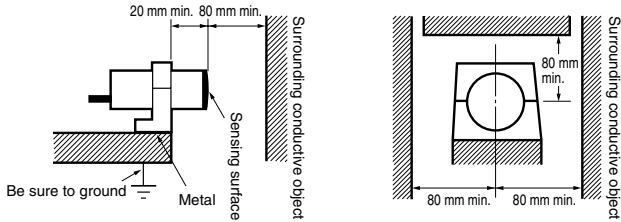


Mutual Interference

Space the two Sensors at a distance exceeding 100 mm to prevent mutual interference.

Face-to-face Mounting



Parallel Mounting



Effect of High-frequency Electro-magnetic Field

The E2K-C may malfunction if there is an ultrasonic washer, high-frequency generator, transceiver, or inverter nearby.

Sensing Object

- **Sensing Object Material.** The E2K-C can detect almost any type of object. The sensing distance of the E2K-C, however, will vary with the electrical characteristics of the object, such as the conductance and inductance of the object, and the water content and capacity of the object. The maximum sensing distance of E2K-C will be available if the object is made of grounded metal.
- **Indirect Detection.** In the case of the detection of objects in metal containers, each metal container must have a non-metallic window.

Miscellaneous



Organic Solvents

E2K-C has a case made of heat-resistant ABS resin. Be sure that the case is free from organic solvents or solutions containing organic solvents.

Dimensions (Unit: mm)

Sensors




E2K-C25M

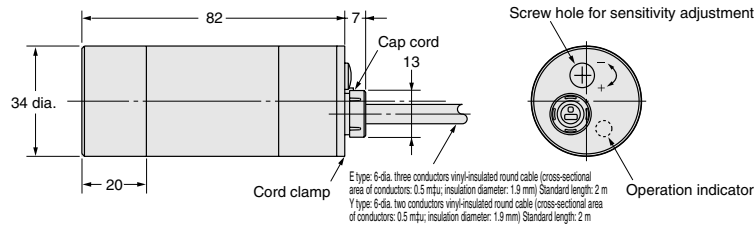

* E models: Detection indicator (red); Y models: Operation indicator (red)

Accessories (Order Separately)*

L-shaped Mounting Bracket Y92E-A34

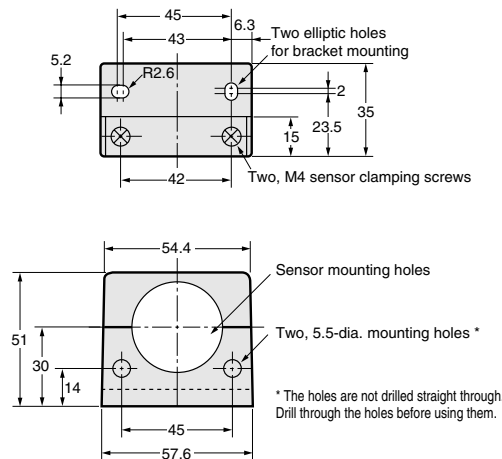

* Attached to the product.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.