


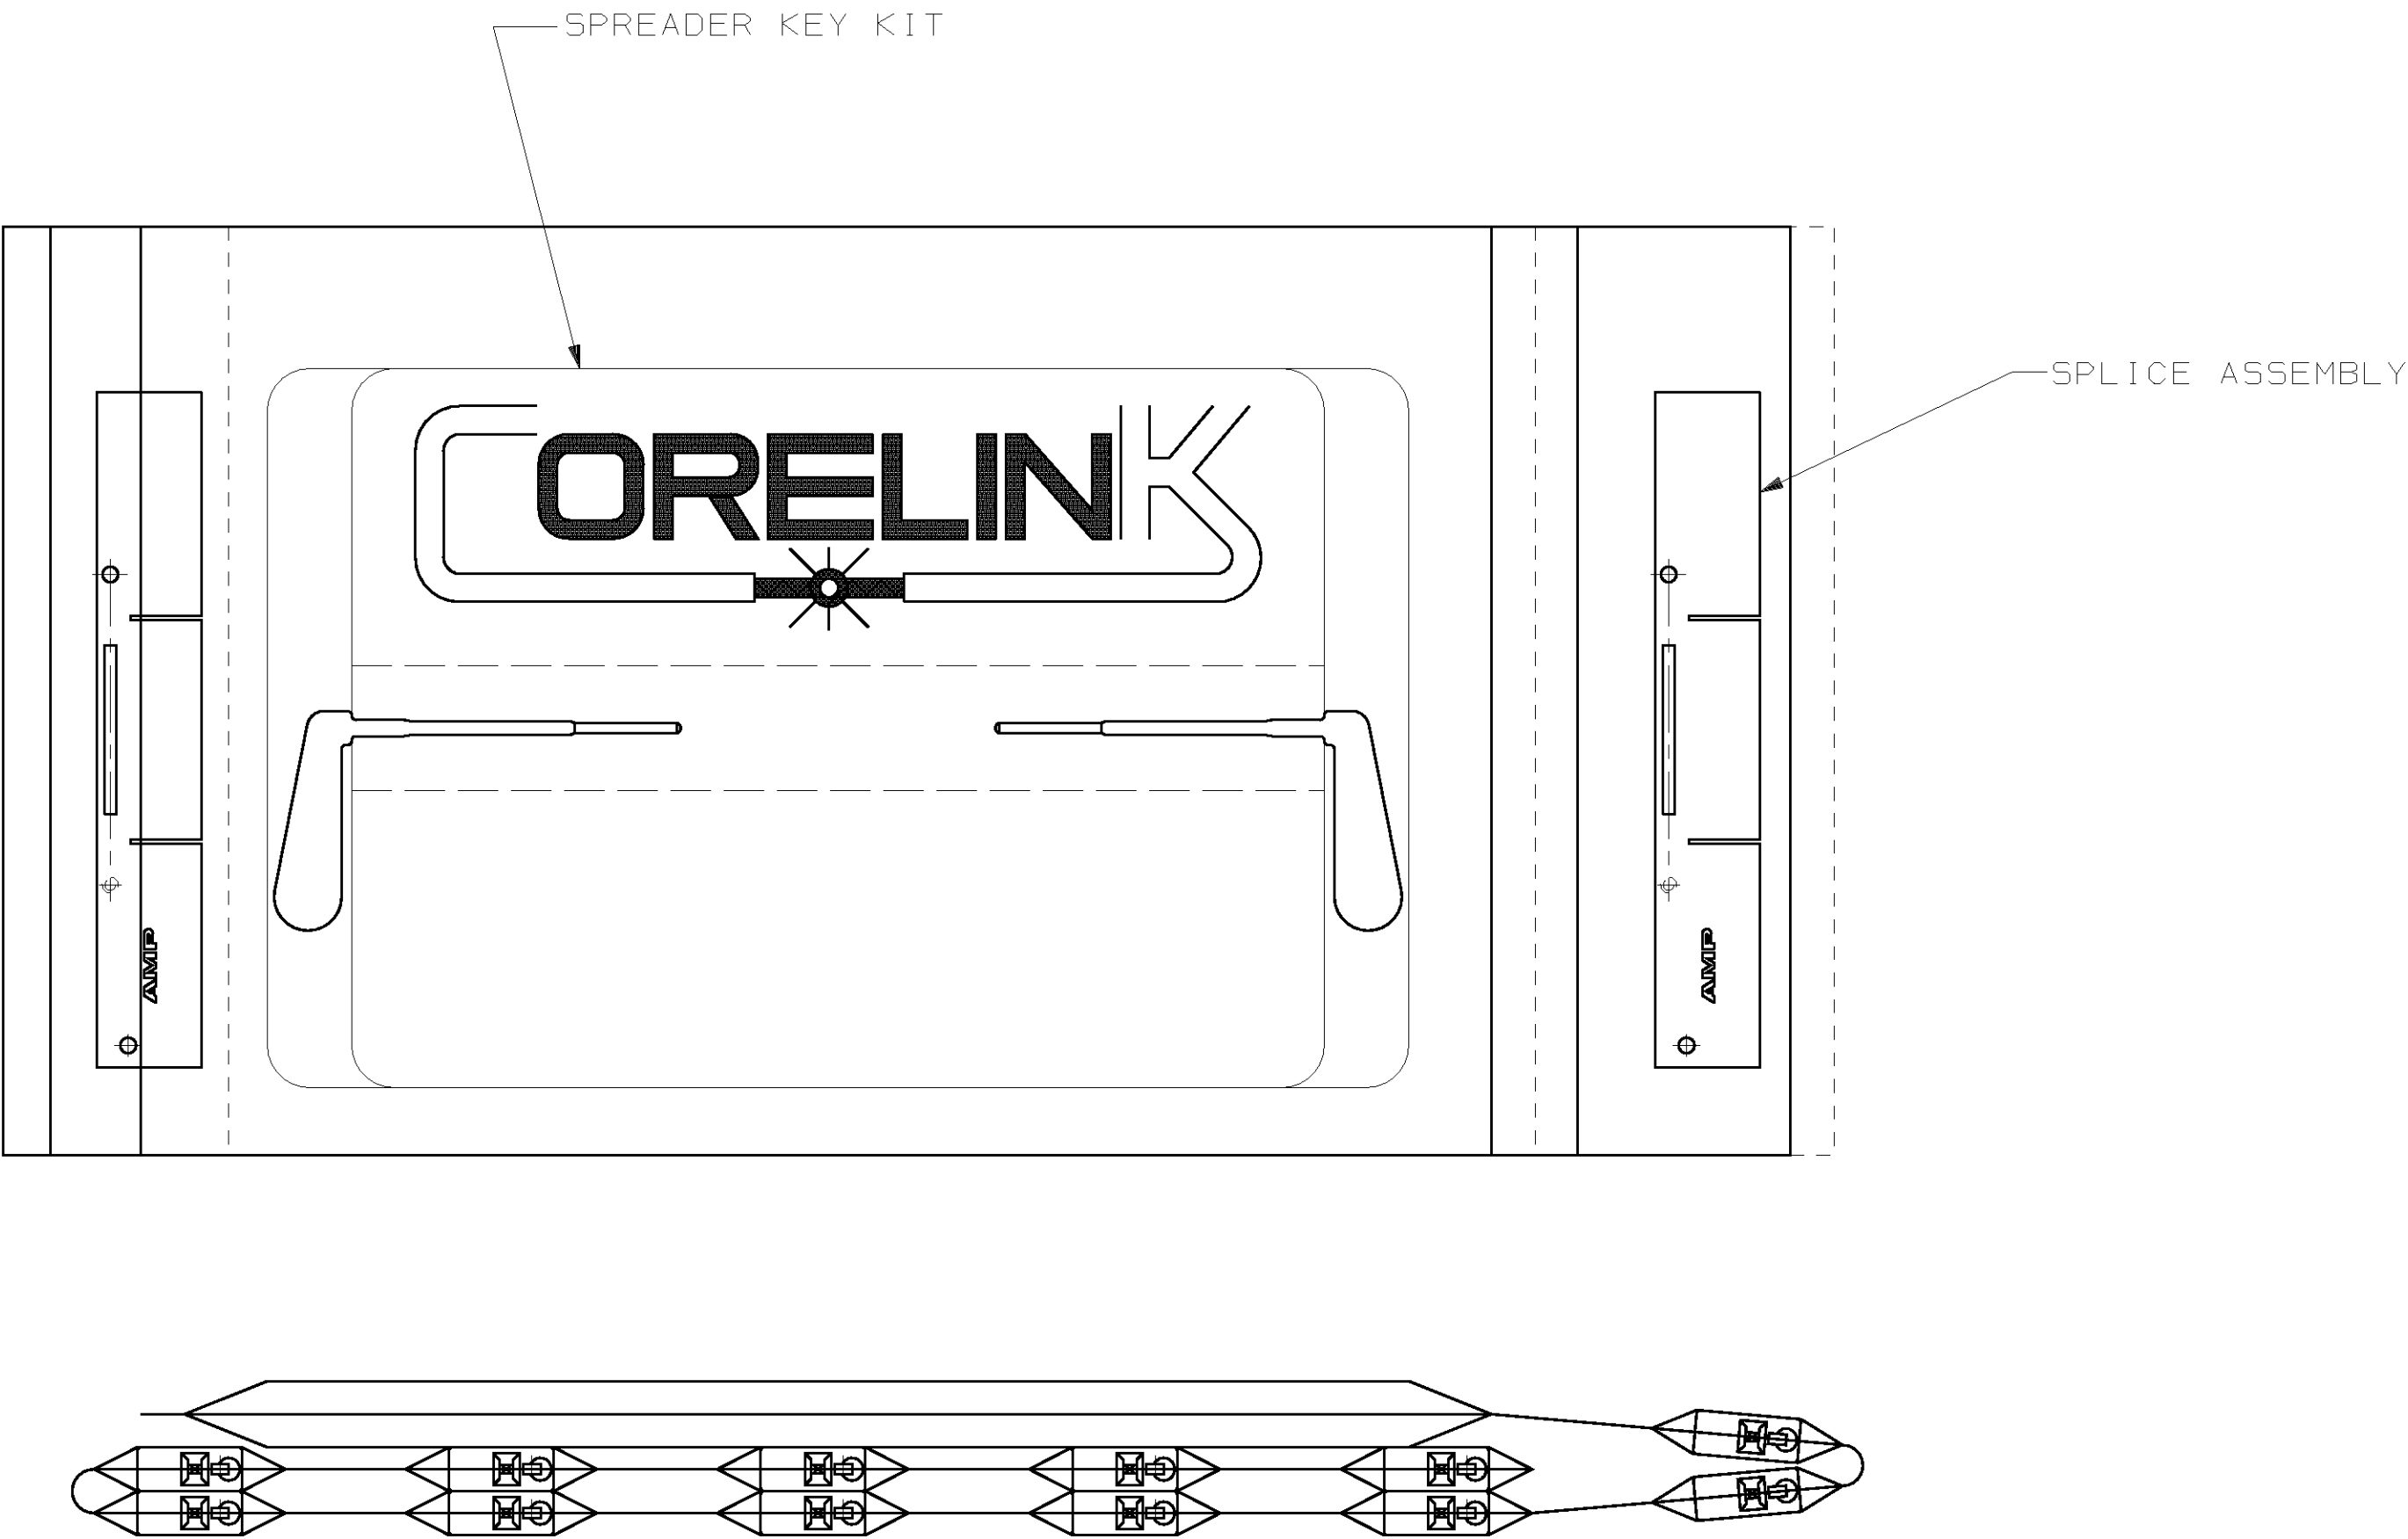

1. 0.3 dB MAXIMUM INSERTION LOSS.
2. TYPICAL LOSS 0.1 dB.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -		DR 3-8-95 B.BRIGGS	AMP AMP Incorporated Harrisburg, PA 17105-3608		
MATERIAL -		CHK 3-8-95 B.BRIGGS			
FINISH -		APPD 3-8-95 T.FAWCETT	NAME		
		APPD 3-8-95 D.STAKEM	CORELINK SPLICE KIT, 12 PACK, MULTIMODE		
		PRODUCT SPEC -	SIZE	CAGE CODE	DRAWING NO
		APPLICATION SPEC -	C	00779	C-503901
		WEIGHT -	SCALE	2:1	SHEET 1 OF 1