


REVISIONS


DOC. NO. SPC-F005 * Effective: 7/8/02 * DCP No: 1398

DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1906	A	RELEASED	EO	04/17/06	TL	05/25/06	HO	05/25/06

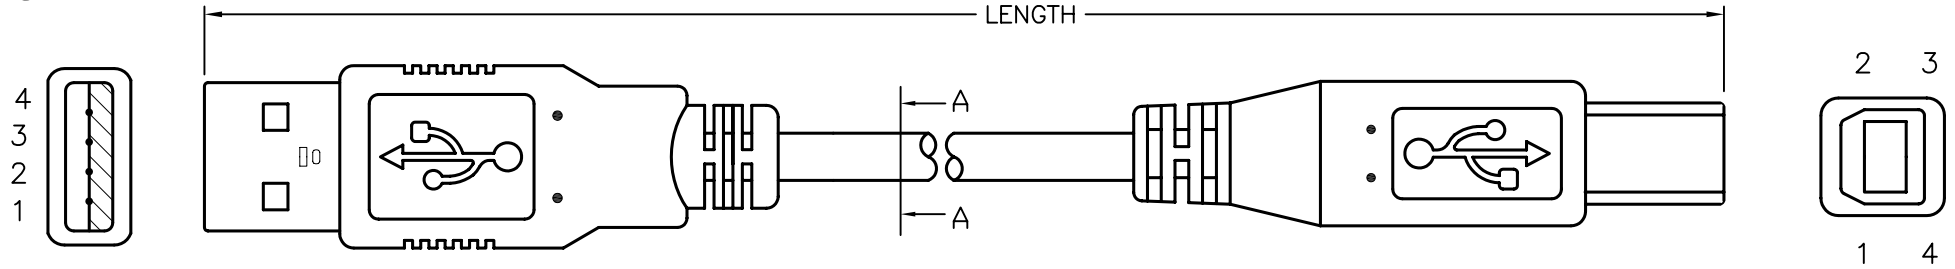

USB TYPE (A) MALE

USB TYPE (B) MALE

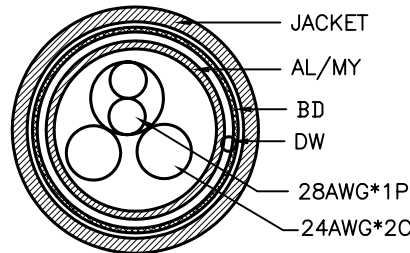

SECTION A-A

SPC TYPE No.	LENGTH (ft)	LENGTH (mm)
SPC20065	3	915±12.7
SPC20066	6	1829±25.4
SPC20063	10	3048±25.4
SPC20064	15	4572±50.8

NOTES:

1. MOLDED CONNECTOR END REQUIREMENTS: A: PVC -45P, PANTONE 426C

2. CABLE:

[28AWG (7/0.127)*1P+24AWG(7/0.203)*2C +AL/MY+DW(7/0.127)+90%BD(16/5/0.1)]TIN

INSULATION WIRE ONE: FO-SKIN, OD=ø0.80±0.05mm

INSULATION WIRE TWO: SR-PVC, OD=ø1.1±0.05mm COLOR: WHITE & GREEN

JACKET: 80°C 80P PVC, OD=4.20±0.15mm COLOR: BLACK, RED

COLOR: Platinum Gray

MARKING: 2725 (UL# TBD) 5 AWM 80°C 30V VW-1 TID:60000223 RoHS Compliant USB 2.0

3. CONNECTOR: USB B MALE, SHELL PLATING WITH NICKEL PIN 30u" OF PLATED, INSULATOR COLOR: WHITE

4. CONNECTOR: USB A MALE, SHELL PLATING WITH NICKEL PIN 30u" OF PLATED, INSULATOR COLOR: WHITE

PIN OUTS

TYPE A MALE	WIRE COLOR	TYPE B MALE
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SHELL		SHELL

DISCLAIMER:
ALL STATEMENTS AND TECHNICAL INFORMATION CONTAINED HEREIN ARE BASED UPON INFORMATION AND/OR TESTS WE BELIEVE TO BE ACCURATE AND RELIABLE. SINCE CONDITIONS OF USE ARE BEYOND OUR CONTROL, THE USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR THE INTENDED USE AND ASSUME ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH.

TOLERANCES:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE FOR REFERENCE PURPOSES ONLY.

DRAWN BY:

EKLAS ODISH

CHECKED BY:

THOMAS LEE

APPROVED BY:

HISHAM ODISH

DATE:

04/17/06

DATE:

05/25/06

DATE:

05/25/06

DRAWING TITLE:

USB 2.0 CABLE, TYPE A MALE to TYPE A MALE

SIZE

A

DWG. NO.

TA-725

ELECTRONIC FILE

TA-725.DWG

REV

A

SCALE: NTS

U.O.M.: mm

SHEET: 1 OF 1