

Features

2, 3 & 4 Pole relay interface modules,
27 mm wide.

Ideal interface for PLC and electronic systems

58.32 - 2 Pole 10 A (screw terminals)

58.33 - 3 Pole 10 A (screw terminals)

58.34 - 4 Pole 7 A (screw terminals)

- AC coils and DC coils
- Supply status indication and coil suppression module as standard
- Identification label
- Cadmium Free contacts
- UL Listing (certain relay/socket combinations)
- 35 mm rail (EN 60715) mounting

58.32 / 58.33 / 58.34
Screw terminals



For outline drawing see page 5

Contact specification

Contact configuration	2 CO (DPDT)	3 CO (3PDT)	4 CO (4PDT)
Rated current/Maximum peak current A	10/20	10/20	7/15
Rated voltage/Maximum switching voltage V AC	250/400	250/400	250/250
Rated load AC1 VA	2,500	2,500	1,750
Rated load AC15 (230 V AC) VA	500	500	350
Single phase motor rating (230 V AC) kW	0.37	0.37	0.125
Breaking capacity DC1: 30/110/220V A	10/0.25/0.12	10/0.25/0.12	7/0.25/0.12
Minimum switching load mW (V/mA)	300 (5/5)	300 (5/5)	300 (5/5)
Standard contact material	AgNi	AgNi	AgNi

Coil specification

Nominal voltage (U _N)	V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230	12 - 24 - 48 - 110 - 120 - 230
	V DC	12 - 24 - 48 - 125	12 - 24 - 48 - 125	12 - 24 - 48 - 125
Rated power AC/DC VA (50 Hz)/W		1.5/1	1.5/1	1.5/1
Operating range	AC	(0.8...1.1)U _N	(0.8...1.1)U _N	(0.8...1.1)U _N
	DC	(0.8...1.1)U _N	(0.8...1.1)U _N	(0.8...1.1)U _N
Holding voltage AC/DC		0.8 U _N /0.5 U _N	0.8 U _N /0.5 U _N	0.8 U _N /0.5 U _N
Must drop-out voltage AC/DC		0.2 U _N /0.1 U _N	0.2 U _N /0.1 U _N	0.2 U _N /0.1 U _N

Technical data

Mechanical life AC/DC cycles		20 · 10 ⁶ /50 · 10 ⁶	20 · 10 ⁶ /50 · 10 ⁶	20 · 10 ⁶ /50 · 10 ⁶
Electrical life at rated load AC1 cycles		200 · 10 ³	200 · 10 ³	150 · 10 ³
Operate/release time ms		10/5 (AC) - 10/15 (DC)	10/5 (AC) - 10/15 (DC)	11/3 (AC) - 11/15 (DC)
Insulation between coil and contacts (1.2/50 µs) kV		3.6	3.6	3.6
Dielectric strength between open contacts V AC		1,000	1,000	1,000
Ambient temperature range °C		-40...+70	-40...+70	-40...+70
Protection category		IP 20	IP 20	IP 20


Approvals relay (according to type)



58.32



- 2 pole, 10 A
- Screw terminals
- 35 mm rail (EN 60715) mounting




Example: AC

58.33



- 3 pole, 10 A
- Screw terminals
- 35 mm rail (EN 60715) mounting




Example: DC

58.34



- 4 pole, 7 A
- Screw terminals
- 35 mm rail (EN 60715) mounting



Example: AC


Features

4 Pole relay interface modules, 31 mm wide.


Ideal interface for PLC and electronic systems

58.54 - 4 Pole 7 A (screwless terminals)

- AC coils and DC coils
- Supply status indication and coil suppression module as standard
- Identification label
- Cadmium Free contacts
- 35 mm rail (EN 60715) mounting

58.54
Screwless terminal

- 4 pole, 7 A
- Screwless terminals
- 35 mm rail (EN 60715) mounting

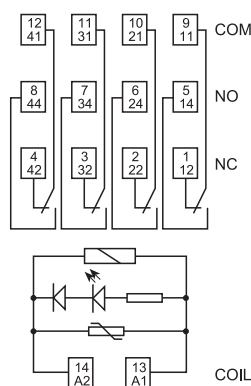

For outline drawing see page 5

Example: AC

Contact specification

Contact configuration		4 CO (4PDT)
Rated current/Maximum peak current	A	7/15
Rated voltage/Maximum switching voltage V AC		250/250
Rated load AC1	VA	1,750
Rated load AC15 (230 V AC)	VA	350
Single phase motor rating (230 V AC)	kW	0.125
Breaking capacity DC1: 30/110/220V	A	7/0.25/0.12
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material		AgNi

Coil specification

Nominal voltage (U_N)	V AC (50/60 Hz)	12 - 24 - 48 - 110 - 120 - 230
	V DC	12 - 24 - 48 - 125
Rated power AC/DC	VA (50 Hz)/W	1.5/1
Operating range	AC	$(0.8 \dots 1.1) U_N$
	DC	$(0.8 \dots 1.1) U_N$
Holding voltage	AC/DC	$0.8 U_N / 0.5 U_N$
Must drop-out voltage	AC/DC	$0.2 U_N / 0.1 U_N$

Technical data

Mechanical life AC/DC	cycles	$20 \cdot 10^6 / 50 \cdot 10^6$
Electrical life at rated load AC1	cycles	$150 \cdot 10^3$
Operate/release time	ms	11/3 (AC) - 11/15 (DC)
Insulation between coil and contacts (1.2/50 μ s)	kV	3.6
Dielectric strength between open contacts	V AC	1,000
Ambient temperature range	$^{\circ}$ C	-25...+70
Protection category		IP 20

Approvals relay (according to type)



Ordering information

Example: 58 series 35 mm rail (EN 60715) mounting, screw terminals interface module, 4 CO (4PDT), 24 V DC coil, green LED + diode.

5

8

.

3

.

4

.

9

.

0

2

4

.

0

0

5

0

Series —

Type —

3 = Screw terminals
35 mm rail (EN 60715) mount

5 = Screwless terminals
35 mm rail (EN 60715) mount

No. of poles —

2 = 2 pole, 10 A

3 = 3 pole, 10 A

4 = 4 pole, 7 A

Coil version —

8 = AC (50/60 Hz)

9 = DC

Coil voltage —

See coil specifications

A: Contact material
0 = AgNi Standard
5 = AgNi + Au

B: Contact circuit
0 = CO (nPDT)

C: Options
5 = Standard DC: green LED + diode (polarity +A1)
6 = Standard AC: green LED + Varistor

D: Special versions
0 = Standard



Selecting features and options: only combinations in the same row are possible.
Preferred selections for best availability are shown in **bold**.

Type	Coil version	A	B	C	D
58.32/33/34/54	AC	0 - 5	0	6	0
58.32/33/34/54	DC	0 - 5	0	5	0


Technical data

Insulation						
Insulation according to EN 61810-1	insulation rated voltage	V	400 (2-3 pole)		250 (4 pole)	
	rated impulse withstand voltage	kV	3.6 (2-3 pole)		2.5 (4 pole)	
	pollution degree		2		2	
	overvoltage category		III		II	
Insulation between coil and contacts (1.2/50 μs)		kV	3.6			
Dielectric strength between open contacts		V AC	1,000			
Dielectric strength between adjacent contacts		V AC	2,000 (58.32,58.33)		1,550 (58.34, 58.54)	
Conducted disturbance immunity						
Burst (5...50)ns, 5 kHz, on A1 - A2			EN 61000-4-4		level 4 (4 kV)	
Surge (1.2/50 μs) on A1 - A2 (differential mode)			EN 61000-4-5		level 4 (4 kV)	
Other data						
Bounce time: NO/NC		ms	1/3			
Vibration resistance (10...55)Hz: NO/NC		g	6/6			
Power lost to the environment	without contact current	W	1			
	with rated current	W	3 (58.32, 58.34, 58.54)		4 (58.33)	
			58.32/33/34 (screw terminals)		58.54 (screwless terminals)	
Wire strip length		mm	8		10	
 Screw torque		Nm	0.5		—	
Max. wire size			solid cable	stranded cable	solid cable	stranded cable
		mm²	1x6 / 2x2.5	1x4 / 2x2.5	2x(0.2... 1.5)	2x(0.2... 1.5)
		AWG	1x10 / 2x14	1x12 / 2x14	2x(24...14)	2x(24... 14)

Contact specification

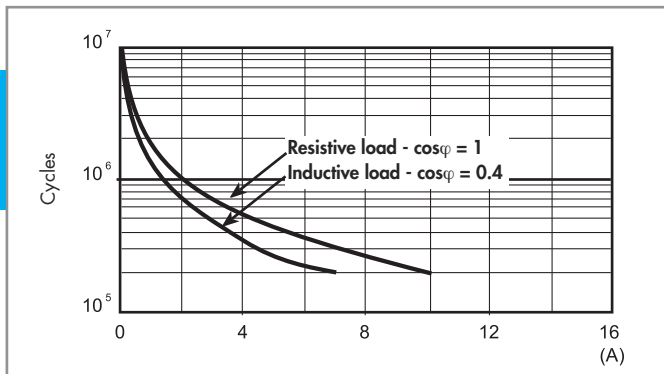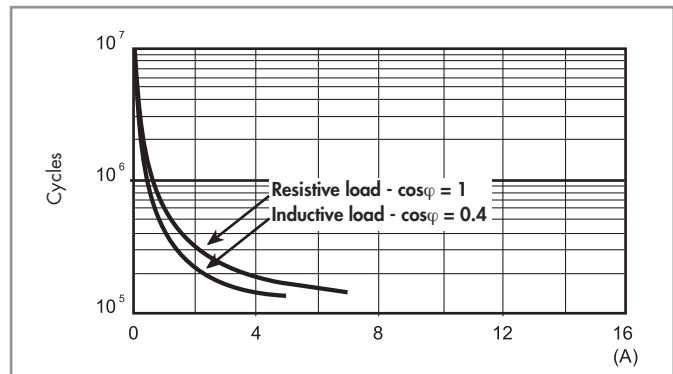F 58 - Electrical life (AC) v contact current
2 & 3 pole relaysF 58 - Electrical life (AC) v contact current
4 pole relay

H 58 - Maximum DC1 breaking capacity

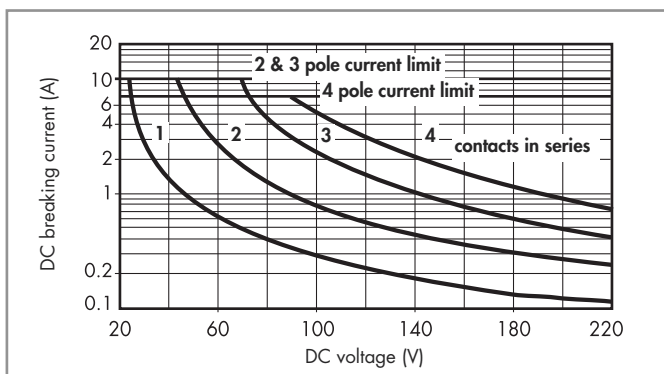


- When switching a resistive load (DC1) having voltage and current values under the curve, an electrical life of $\geq 100 \cdot 10^3$ can be expected.
- In the case of DC13 loads, the connection of a diode in parallel with the load will permit a similar electrical life as for a DC1 load. Note: the release time for the load will be increased.

Coil specifications

DC coil data

Nominal voltage U_N	Coil code	Operating range		Resistance	Rated coil absorption I at U_N
V		U_{min} V	U_{max} V	R Ω	I mA
12	9.012	9.6	13.2	140	86
24	9.024	19.2	26.4	600	40
48	9.048	38.4	52.8	2,400	20
125	9.125	100	138	17,300	7.2

R 58 - DC coil operating range v ambient temperature

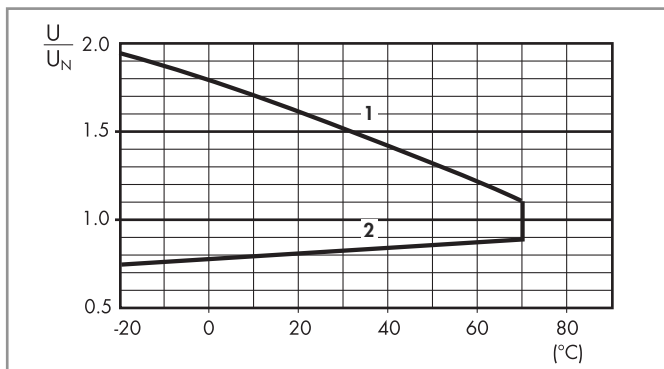


- 1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

AC coil data

Nominal voltage U_N	Coil code	Operating range		Resistance	Rated coil absorption I at U_N (50Hz)
V		U_{min} V	U_{max} V	R Ω	I mA
12	8.012	9.6	13.2	50	97
24	8.024	19.2	26.4	190	53
48	8.048	38.4	52.8	770	25
110	8.110	88	121	4,000	12.5
120	8.120	96	132	4,700	12
230	8.230	184	253	17,000	6

R 58 - AC coil operating range v ambient temperature

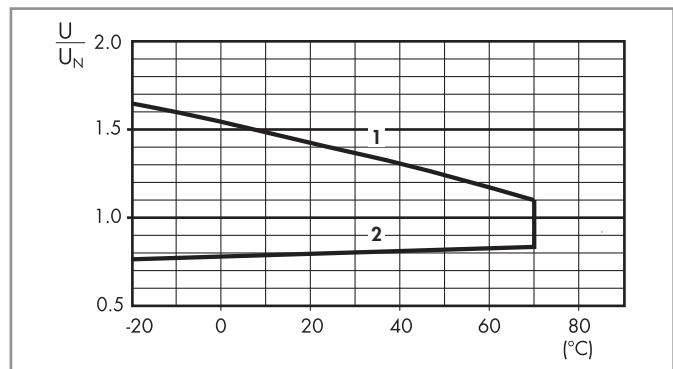


- 1 - Max. permitted coil voltage.
2 - Min. pick-up voltage with coil at ambient temperature.

Combinations


 **UL** Certain relay/socket combinations

Code	Type of socket	Type of relay	Module	Retaining clip
58.32	94.02	55.32	99.02	094.91.3
58.33	94.03	55.33	99.02	094.91.3
58.34	94.04	55.34	99.02	094.91.3
58.54	94.54	55.34	99.02	094.91.3

Outline drawing

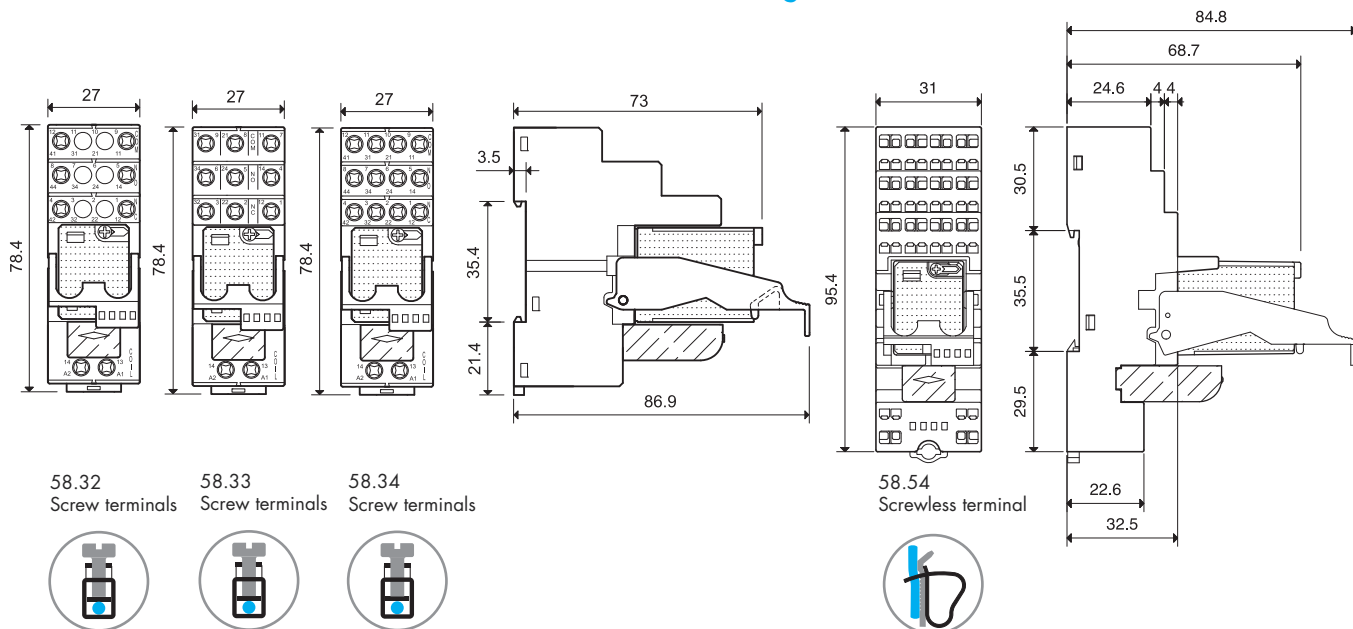

Accessories





6-way jumper link for type 58.32, 58.33, 58.34

094.06 (blue)

094.06.0 (black)

Rated values

10 A - 250 V

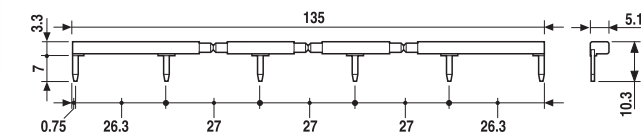


6-way jumper link for type 58.54

094.56 (blue)

Rated values

10 A - 250 V

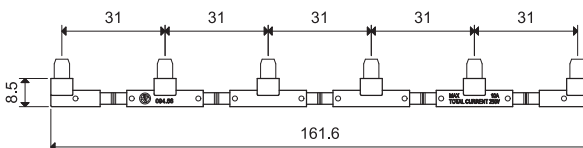

Sheet of marker tags, plastic, 72 tags, 6x12 mm

060.72

Packaging codes

How to code and identify retaining clip and packaging options for sockets.

Example:

5 8 . 3 4 . 9 . 0 2 4 . 0 0 5 0 S P A

A Standard packaging
B Blister packaging

SP Plastic retaining clip

