

465.0MHz SMD SAW FILTER

AFS465.0W06-TS3



RoHS
Compliant



3.8 x 3.8 x 1.5mm

FEATURES:

- 3.8 x 3.8 x 1.5mm SMD package
- Low loss

APPLICATIONS:

- CDMA450
- Wireless communication
- PDA

STANDARD SPECIFICATIONS:



MAXIMUM RATINGS

Item	Value
Operation Temperature Range	-30°C to +80°C
Storage Temperature Range	-40°C to +85°C
DC Permissive Voltage	10V DC max.
Maximum Input Power	27 dBm

ELECTRICAL CHARACTERISTICS

Item	Frequency (MHz)	Specification
Center Frequency (fo)	465.0	
Insertion Loss	462.5 ~ 467.5	3.8 dB max.
VSWR	462.5 ~ 467.5	2.0 : 1 max.
Relative Loss	0.3 ~ 425.50	48 dB min
	452.50 ~ 456.73	40 dB min
	456.73 ~ 457.50	35 dB min
	485.00 ~ 1000.00	40 dB min
	1000.00 ~ 1700.00	30 dB min
	1700.00 ~ 2200.00	20 dB min
Temperature Coefficient of Frequency		-30ppm/°C
Terminating Source Impedance		50Ω
Terminating Load Impedance		50Ω

FREQUENCY CHARACTERISTICS:

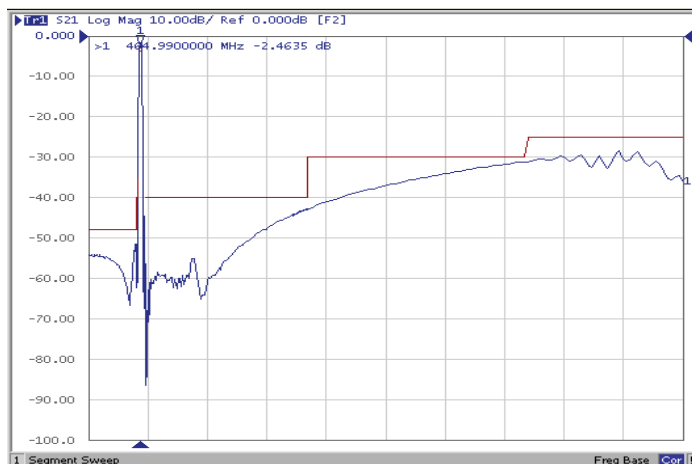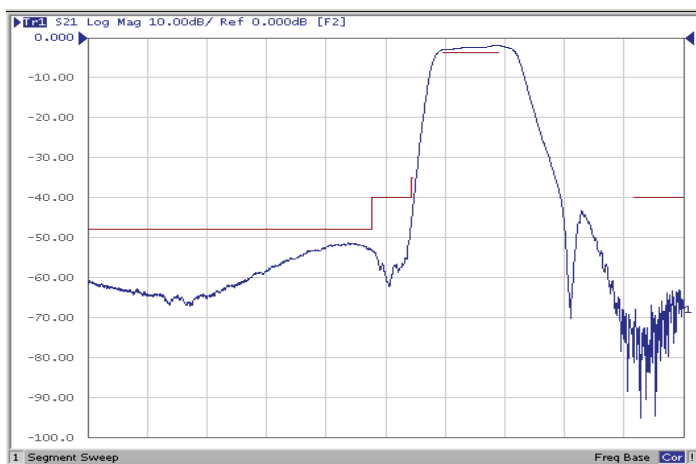

465.0MHz SMD SAW FILTER

AFS465.0W06-TS3




RoHS
Compliant




3.8 x 3.8 x 1.5mm


TEST CIRCUIT:

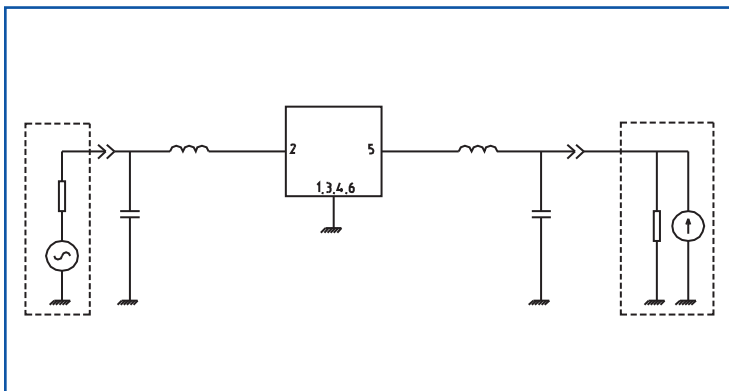

REFLOW PROFILE:

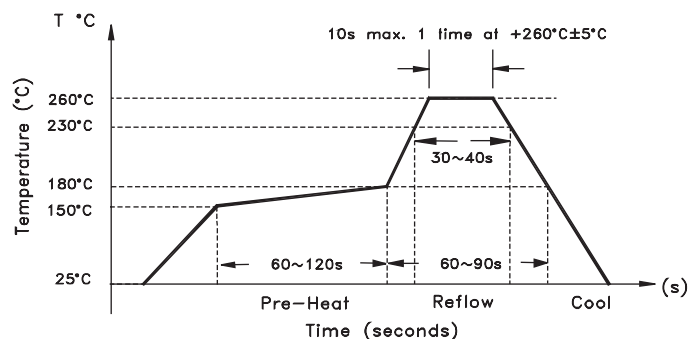



OUTLINE DIMENSIONS:

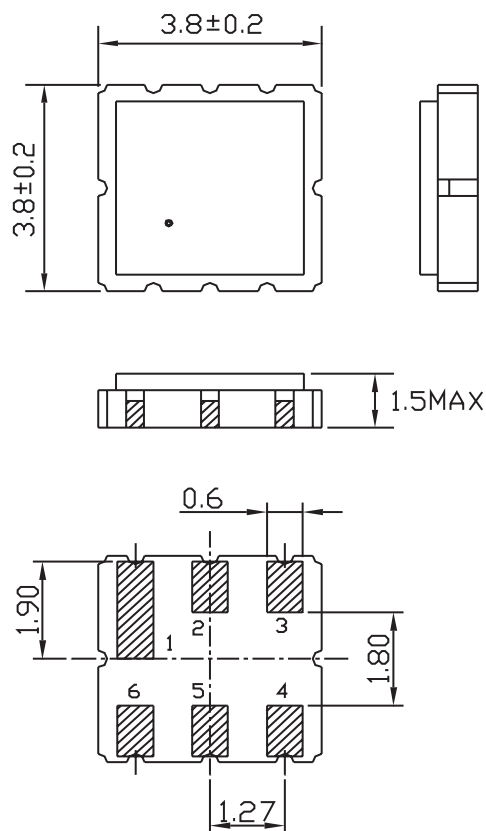


Dimension : mm

Pin No.	Function
Pin 2	Input
Pin 5	Output
Other	Ground

TAPE & REEL: Tape and reel (1,000pcs/reel)

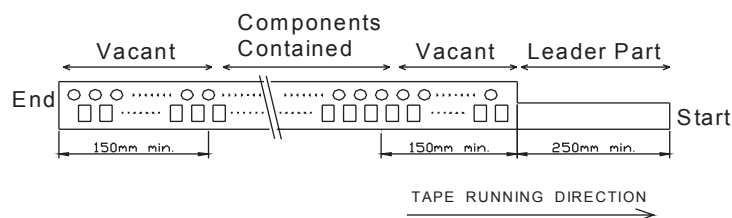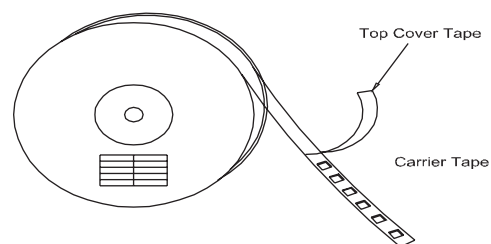

TAPE & REEL DIMENSION AND PARTS DIRECTION

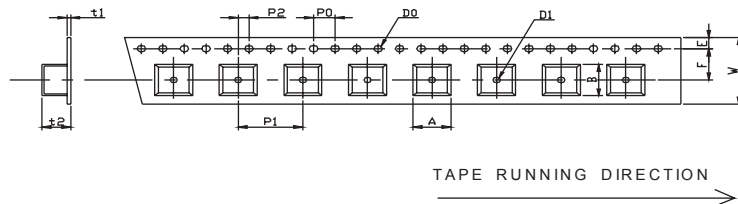

Dimension : mm

W	F	E	P0	P1	P2	D0	D1	t1	t2	A	B
12.0	5.5	1.75	4.0	8.0	2.0	Φ1.5	Φ1.5	0.31	1.95	4.1	4.1
±0.3	±0.1	±0.1	±0.2	±0.1	±0.2	±0.1	±0.25	max.	max.	max.	max.

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.