


## General Purpose Plastic Rectifier


**DO-201AD**

### FEATURES

- Low forward voltage drop
- Low leakage current
- High forward surge capability
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



### TYPICAL APPLICATIONS

For use in general purpose rectification of power supplies, inverters, converters and freewheeling diodes application.

(Note: These devices are not Q101 qualified. Therefore, the devices specified in this datasheet have not been designed for use in automotive or Hi-Rel applications.)

### MECHANICAL DATA

**Case:** DO-201AD, molded epoxy body

Epoxy meets UL-94V-0 flammability rating

**Terminals:** Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade

**Polarity:** Color band denotes cathode end

### MAJOR RATINGS AND CHARACTERISTICS

|             |                |
|-------------|----------------|
| $I_{F(AV)}$ | 3.0 A          |
| $V_{RRM}$   | 50 V to 1000 V |
| $I_{FSM}$   | 200 A          |
| $I_R$       | 5.0 $\mu$ A    |
| $V_F$       | 1.2 V          |
| $T_j$ max.  | 150 °C         |

### MAXIMUM RATINGS ( $T_A = 25$ °C unless otherwise noted)

| PARAMETER                                                                                          | SYMBOL         | 1N5400        | 1N5401 | 1N5402 | 1N5403 | 1N5404 | 1N5405 | 1N5406 | 1N5407 | 1N5408 | UNIT    |
|----------------------------------------------------------------------------------------------------|----------------|---------------|--------|--------|--------|--------|--------|--------|--------|--------|---------|
| Maximum repetitive peak reverse voltage                                                            | $V_{RRM}$      | 50            | 100    | 200    | 300    | 400    | 500    | 600    | 800    | 1000   | V       |
| Maximum RMS voltage                                                                                | $V_{RMS}$      | 35            | 70     | 140    | 210    | 280    | 350    | 420    | 560    | 700    | V       |
| Maximum DC blocking voltage                                                                        | $V_{DC}$       | 50            | 100    | 200    | 300    | 400    | 500    | 600    | 800    | 1000   | V       |
| Maximum average forward rectified current 0.5" (12.5 mm) lead length at $T_L = 105$ °C             | $I_{F(AV)}$    | 3.0           |        |        |        |        |        |        |        |        | A       |
| Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load                 | $I_{FSM}$      | 200           |        |        |        |        |        |        |        |        | A       |
| Maximum full load reverse current, full cycle average 0.5" (12.5 mm) lead length at $T_L = 105$ °C | $I_{R(AV)}$    | 500           |        |        |        |        |        |        |        |        | $\mu$ A |
| Operating junction and storage temperature range                                                   | $T_J, T_{STG}$ | - 50 to + 150 |        |        |        |        |        |        |        |        | °C      |

| <b>ELECTRICAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted) |                                                                           |        |            |        |        |        |        |        |        |        |        |               |
|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------|--------|------------|--------|--------|--------|--------|--------|--------|--------|--------|---------------|
| PARAMETER                                                                                      | TEST CONDITIONS                                                           | SYMBOL | 1N5400     | 1N5401 | 1N5402 | 1N5403 | 1N5404 | 1N5405 | 1N5406 | 1N5407 | 1N5408 | UNIT          |
| Maximum instantaneous forward voltage                                                          | at 3.0 A                                                                  | $V_F$  | 1.2        |        |        |        |        |        |        |        |        | V             |
| Maximum DC reverse current at rated DC blocking voltage                                        | $T_A = 25\text{ }^{\circ}\text{C}$<br>$T_A = 150\text{ }^{\circ}\text{C}$ | $I_R$  | 5.0<br>500 |        |        |        |        |        |        |        |        | $\mu\text{A}$ |
| Typical junction capacitance                                                                   | at 4.0 V, 1 MHz                                                           | $C_J$  | 30         |        |        |        |        |        |        |        |        | pF            |

| <b>THERMAL CHARACTERISTICS</b> ( $T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted) |                 |        |        |        |        |        |        |        |        |        |                      |
|---------------------------------------------------------------------------------------------|-----------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|----------------------|
| PARAMETER                                                                                   | SYMBOL          | 1N5400 | 1N5401 | 1N5402 | 1N5403 | 1N5404 | 1N5405 | 1N5406 | 1N5407 | 1N5408 | UNIT                 |
| Typical thermal resistance <sup>(1)</sup>                                                   | $R_{\theta JA}$ | 20     |        |        |        |        |        |        |        |        | $^{\circ}\text{C/W}$ |

**Note:**

(1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, P.C.B. mounted with 0.8 x 0.8" (20 x 20 mm) copper heatsinks

| <b>ORDERING INFORMATION</b> |                 |                        |               |                                |
|-----------------------------|-----------------|------------------------|---------------|--------------------------------|
| PREFERRED P/N               | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE                  |
| 1N5404-E3/54                | 1.1             | 54                     | 1400          | 13" Diameter Paper Tape & Reel |
| 1N5404-E3/73                | 1.1             | 73                     | 1000          | Ammo Pack Packaging            |

**RATINGS AND CHARACTERISTICS CURVES**

( $T_A = 25\text{ }^{\circ}\text{C}$  unless otherwise noted)

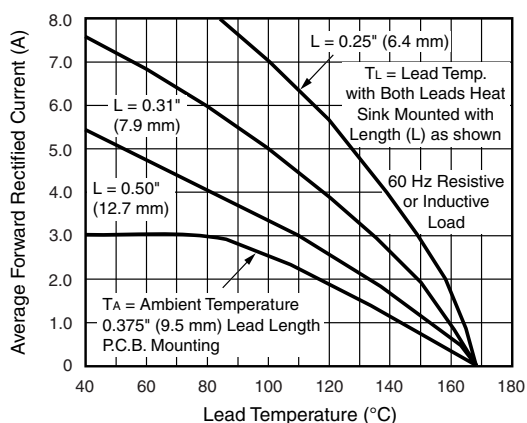


Figure 1. Forward Current Derating Curve

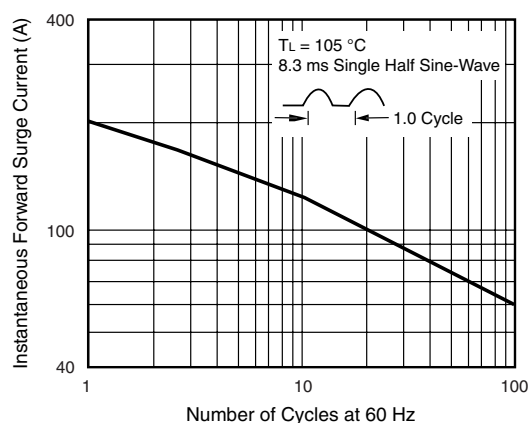


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current

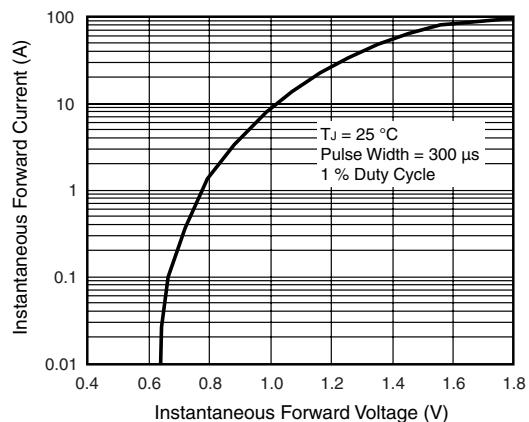


Figure 3. Typical Instantaneous Forward Characteristics

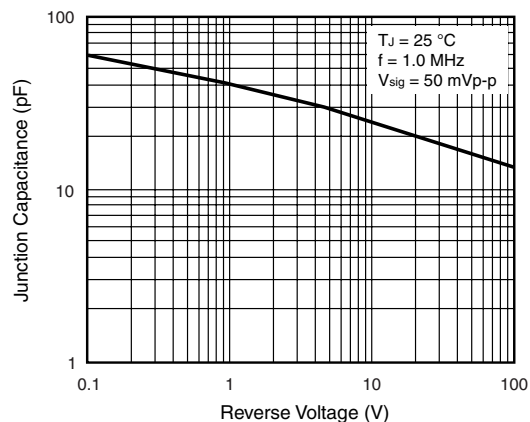


Figure 5. Typical Junction Capacitance

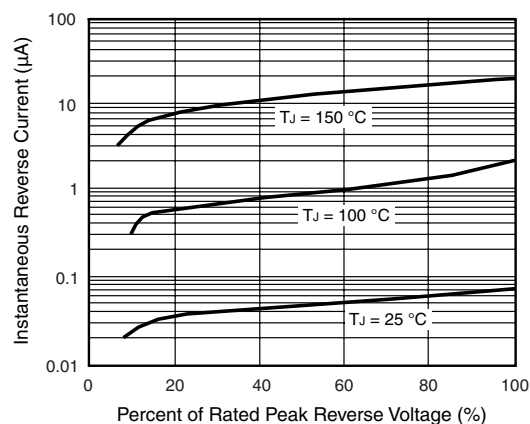


Figure 4. Typical Reverse Characteristics


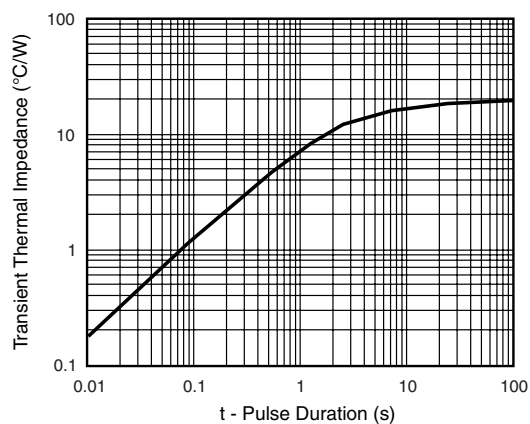


Figure 6. Typical Transient Thermal Impedance

### PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



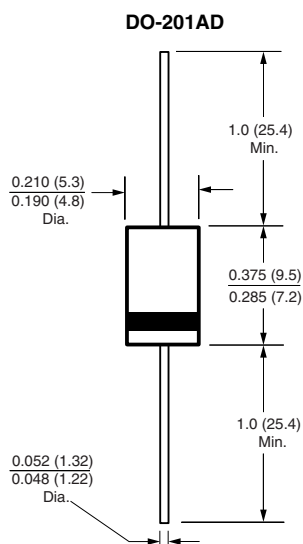

### Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.