


EVEREADY 493



Industry Standard Dimensions

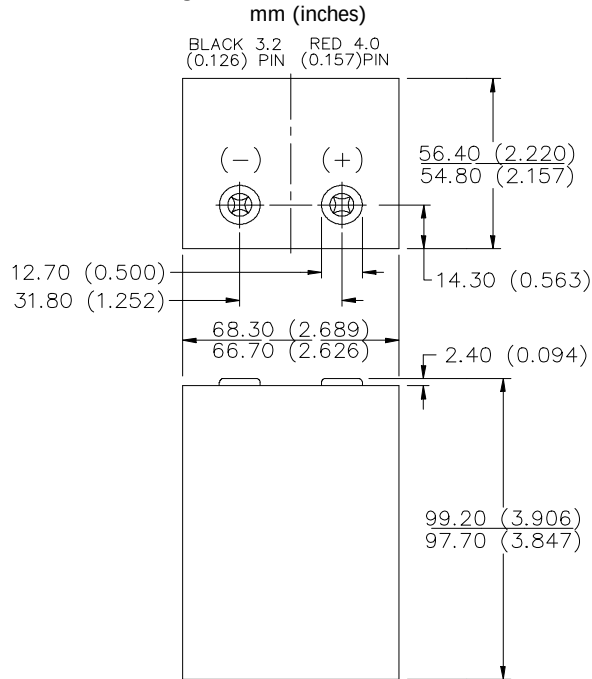

Chemical System: Zinc-Manganese Dioxide (Zn/MnO₂)

Designation: ANSI / NEDA-722

Battery Voltage: 300 Volts

Average Weight: 445 grams (15.8 oz.)

Volume: 360.5 cubic centimeters (22 cubic inch)


Average Capacity: 140 mAh to 0.8 volts/cell
(Rated at 25 mA continuous drain at 21°C)

Cells: Two Hundred No. 112 in series

Jacket: Paper

TYPICAL DISCHARGE CURVE

Simulated Test @ 21°C (70°F)

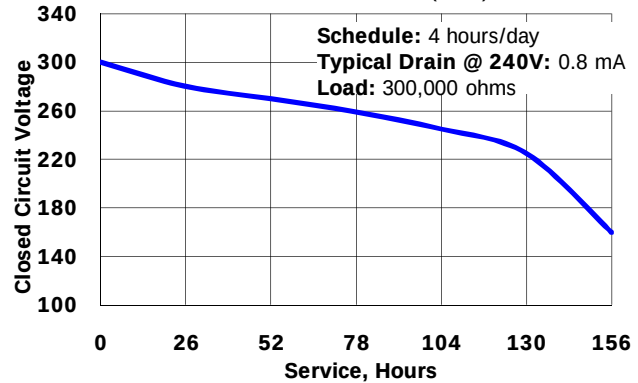

Simulated Application Test Estimated Average Service at 21°C (70°F)

Schedule:	Typical Drains at 240V (milliamperes)	Load (ohms)	Cutoff Voltage			
			160V180V	200V220V	240V260V	
4 hours/day	0.8	300,000	Hours			
			156	147	145	135 115 75

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved