


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

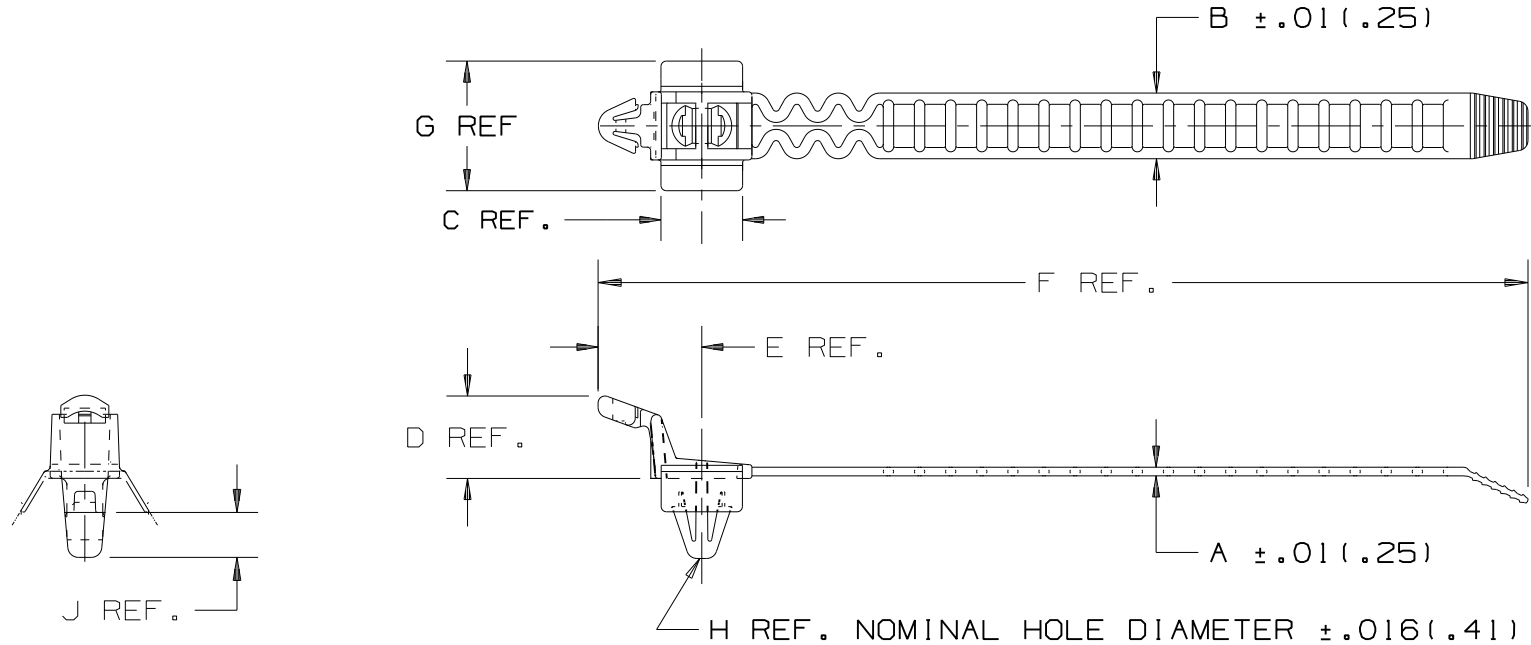

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	F	G	H	J	MAX. PANEL THICKNESS in (mm)	MIN. LOOP TENSILE lbs (N)	CROSS SECTION	WEIGHT 100 pcs lbs (g)
	MIN. in (mm)	MAX. in (mm)													
PRLWP30S-30	.312 (7.9)	1.43 (36)	.05 (1.3)	.38 (9.7)	.47 (11.9)	.47 (11.9)	.65 (16.5)	5.35 (136)	.71 (18)	.266 (6.8)	.30 (7.6)	.118 (3.0)	35 (156)	STANDARD	.36 (163)
PRLWP50S-30	.312 (7.9)	2.18 (55)	.05 (1.3)	.38 (9.7)	.47 (11.9)	.47 (11.9)	.65 (16.5)	7.75 (197)	.71 (18)	.266 (6.8)	.30 (7.6)	.118 (3.0)	35 (156)	STANDARD	.44 (200)

WI0035EK/15

										DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS.					
										PANDUIT CORP. TINLEY PARK, ILLINOIS					
										WINGED PUSH MOUNT CABLE TIE PRLWP SERIES					
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X)± .1(.25) (.XXX) ± .020(.51) (.XX)± .02(.5) ANGLES ----			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.		
15	6/09/10	BWG	TSB	MOVED "F" DIMENSION TO OVERALL LENGTH. WAS LOCATED AT CENTER LINE OF PUSH MOUNT.			23343	15	BOBK	DRAWN BY WKS/RLS	MAT'L: HEAT STABILIZED NYLON 6.6 BLACK (-30)		SCALE NONE		
14	12/16/04	JABO	JVL	CHANGED METRIC CONVERSION FROM WHOLE NUMBER TO ONE DIGIT ON DIM. C & D			23343	14	JVL	DATE 10/3/88			DRAWING NO. SS-23343		DWG A
REV	DATE	BY	CHK	DESCRIPTION			ECN	R	CUST	SUP	CHK'D HVP			SIZE	