

TPA SERIES


FEATURES

- * Bi-directional Crowbar Protection.
- * Voltage Range: From 62 Volt to 270 Volt
- * Holding Current, $I_H = 150$ mA min.
- * Peak Pulse Current : $I_{PP} = 50$ A, 10/1000 μ s.
- * **Pb / RoHS Free**

DESCRIPTION

The TPA series are SIDAC devices especially designed for protecting sensitive telecommunication equipment against lightning and transient voltages induced by AC power lines. They are available in the D2 axial package. SIDAC device provide bi-directional protection by crowbar action. Their characteristic response to transient overvoltage makes them particularly suited to protect voltage sensitive telecommunication equipment.

SIDAC

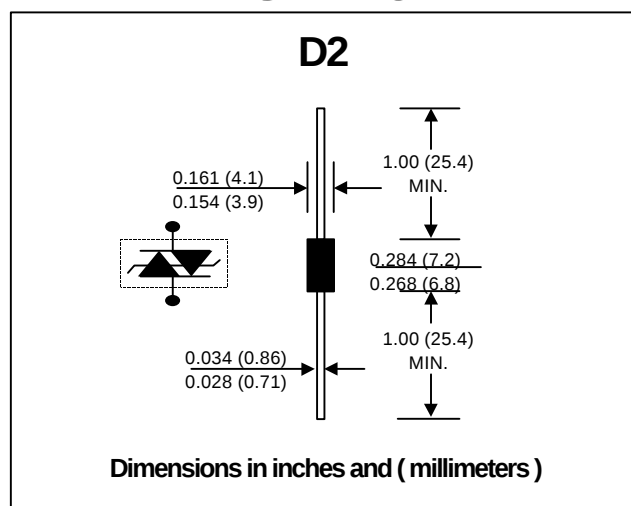

COMPLIES WITH THE FOLLOWING STANDARDS :	Peak Surge Voltage (V)	Voltage Waveform (ms)	Current Waveform (ms)	Admissible I_{pp} (A)	Necessary Resistance (W)
(CCITT) ITU-K20	1000	10/700	5/310	25	-
(CCITT) ITU-K17	1500	10/700	5/310	38	-
VDE0433	2000	10/700	5/310	50	-
VDE0878	2000	1.2/50	1/20	50	-
IEC-1000-4-5	level 3	10/700	5/310	50	-
	level 4	1.2/50	8/20	100	-
FCC Part 68, lightning surge type A	1500	10/160	10/160	75	12.5
	800	10/560	10/560	55	6.5
FCC Part 68, lightning surge type B	1000	9/720	5/320	25	-
BELLCORE TR-NWT-001089 First level	2500	2/10	2/10	150	11.5
	1000	10/1000	10/100	50	10
BELLCORE TR-NWT-001089 Second level	5000	2/10	2/10	150	11.5
CNET 131-24	1000	0.5/700	0.8/310	25	-


ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ \text{C}$)

Symbol	Parameter		Value	Unit
P	Power dissipation on infinite heatsink	$T_a = 50^\circ \text{C}$	1.7	W
I_{PP}	Peak pulse current	10/1000 μ s	50	A
		8/20 μ s	100	
I_{TSM}	Non repetitive surge peak on-state current	$t_p = 20$ ms	30	A
I^2t	I^2t value for fusing	$t_p = 20$ ms	9	A^2s
dv/dt	Critical rate of rise of off-state voltage	V_{RM}	5	kV/ μ s
Tstg	Storage temperature range		-55 to + 150	$^\circ \text{C}$
T_j	Maximum junction temperature		150	$^\circ \text{C}$
T_L	Maximum lead temperature for soldering during 10s at 5mm from case		230	$^\circ \text{C}$

THERMAL RESISTANCES

Symbol	Parameter	Value	Unit
Rth(j-l)	Junction to leads ($L_{lead} = 10\text{mm}$)	60	$^{\circ}\text{C/W}$
Rth(j-a)	Junction to ambient on printed circuit ($L_{lead} = 10\text{mm}$)	100	$^{\circ}\text{C/W}$

Symbol	Parameter
V_{RM}	Stand-off Voltage
I_{RM}	Leakage current at stand-off Voltage
V_{RM}	Continuous Reverse Voltage
V_{BR}	Breakdown Voltage
V_{BO}	Breakover Voltage
I_H	Holding Current
I_{BO}	Breakover Current
I_{PP}	Peak pulse current
C	Capacitance

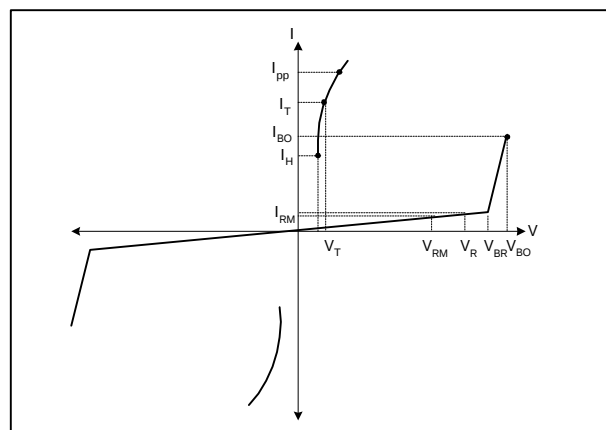


ELECTRICAL CHARACTERISTICS

Rating at 25 $^{\circ}\text{C}$ ambient temperature unless otherwise specified

TYPE	$I_{RM} \text{ max. @ } V_{RM}$		$I_R \text{ max. @ } V_{BR}$		$V_{BO} \text{ @ } I_{BO}$		I_H	C
	mA	V	max. (note1)	V	max. (note2)	mA	min. (note3)	max. (note4)
TPA62	2	56	50	62	82	800	150	150
TPA68	2	61	50	68	90	800	150	150
TPA100	2	90	50	100	133	800	150	100
TPA120	2	108	50	120	160	800	150	100
TPA130	2	117	50	130	173	800	150	100
TPA180	2	162	50	180	240	800	150	100
TPA200	2	180	50	200	267	800	150	100
TPA220	2	198	50	220	293	800	150	100
TPA240	2	216	50	240	320	800	150	100
TPA270	2	243	50	270	360	800	150	100

- Note : 1. I_R measured at V_R guarantee $V_{BRmin} \geq V_R$
2. Measured at 50 Hz (1 cycle) - See test circuit 1
3. See test circuit 2
4. $V_R = 1\text{V}$, $f = 1\text{MHz}$. Refer to fig.3 for C versus V_R .


TEST CIRCUIT 1 for I_{BO} and V_{BO} parameter :

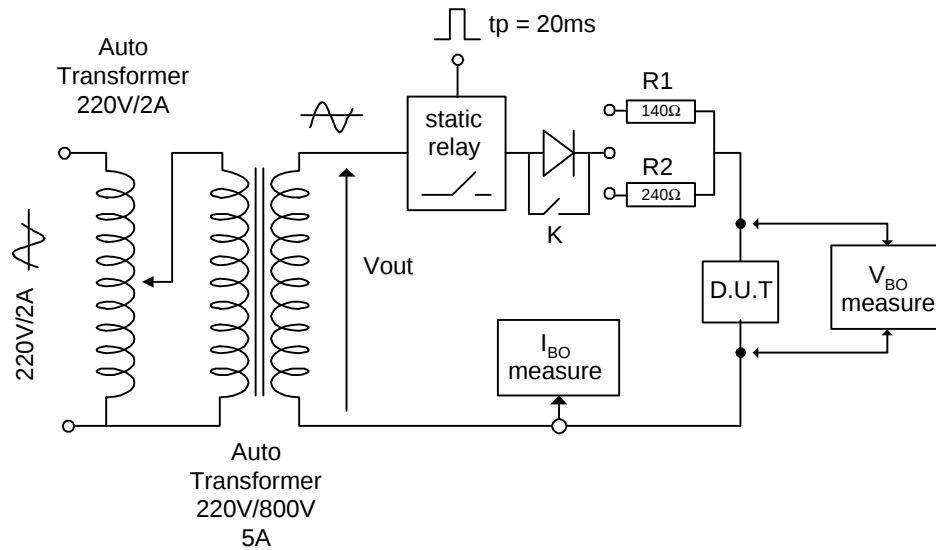

TEST PROCEDURE :

- Pulse Test duration ($t_p=20ms$) :
 - For Bi-directional devices = Switch K is closed
 - For Unidirectional devices = Switch K is open.
- V_{OUT} Selection
 - Device with $V_{BO} < 200$ Volt
 - $V_{OUT} = 250 V_{RMS}$, $R1 = 140 \Omega$
 - Device with $V_{BO} \geq 200$ Volt
 - $V_{OUT} = 480 V_{RMS}$, $R1 = 240 \Omega$

TEST CIRCUIT 2 for I_H parameter :

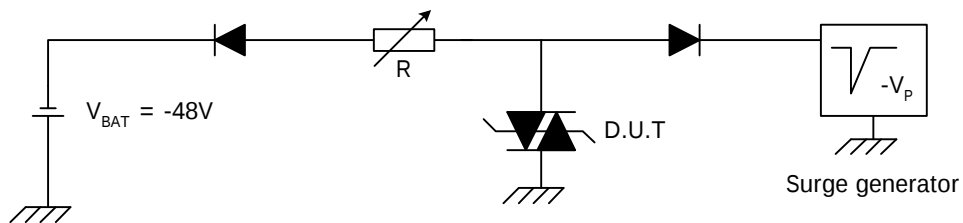

This is GO - NOGO Test which allows to confirm the holding current (I_H) level in a functional test circuit.

TEST PROCEDURE :

1. Adjust the current level at the I_H value by short circuiting the AK of the D.U.T
2. Fire the D.U.T. with a surge Current : $I_{pp} = 10A$, $10/1000 \mu s$.
3. The D.U.T. will Come back off-state within 50ms max.

Fig. 1 : Non repetitive surge peak on-state current versus overload duration (T_j initial = 25 °C)

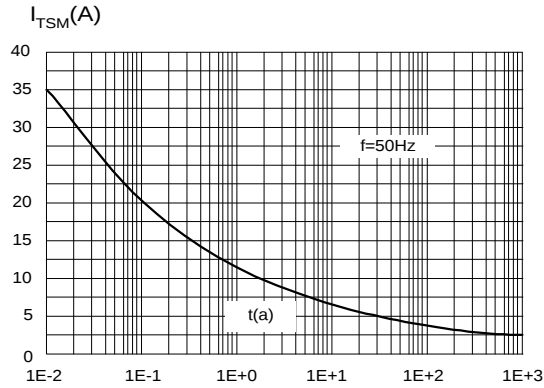


Fig. 2 : Relative variation of holding current versus junction temperature

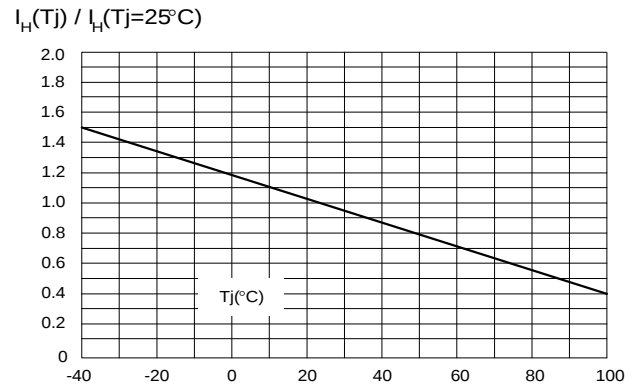


Fig 3 : Relative variation of junction capacitance versus reverse applied voltage (typical values).

Note: For V_{RM} upper than 56 V , the curve is extrapolated dotted line).

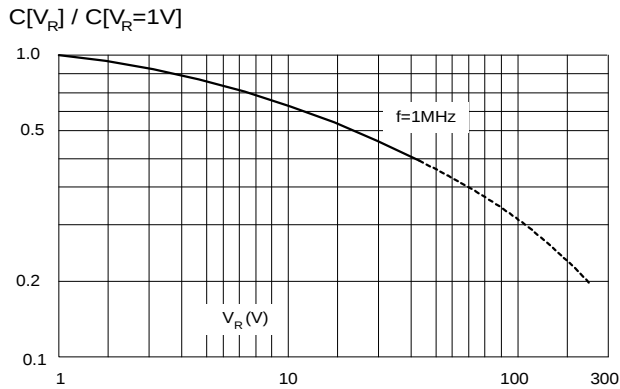


Fig. 4 : On-state current versus on-state voltage (typical value).

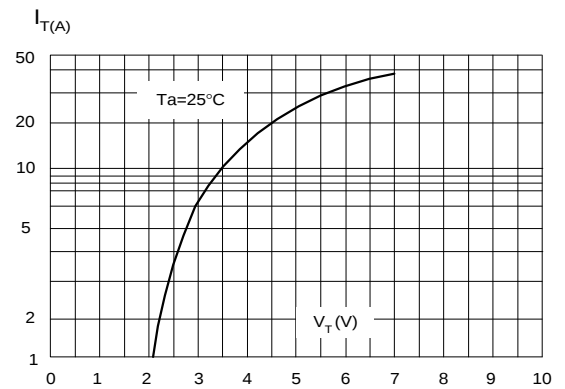


Fig. 5 : Transient thermal impedance junction to ambient versus pulse duration (for FR4 PC Board with $T_{lead} = 10$ mm).

