

THIS DRAWING IS UNPUBLISHED.



RELEASED FOR PUBLICATION, 19

© COPYRIGHT 19

BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	REVISIONS				
				ZONE	LTR	DESCRIPTION	DATE	APPD
CE	00				A	REVISE PER 0A00-0601-04	08FEB05	KG/DK

1. TO PROTECT FIBER DURING CURING.
2. FITS OPTIMATE 2.0 AND 2.5mm THREADED CONNECTORS.

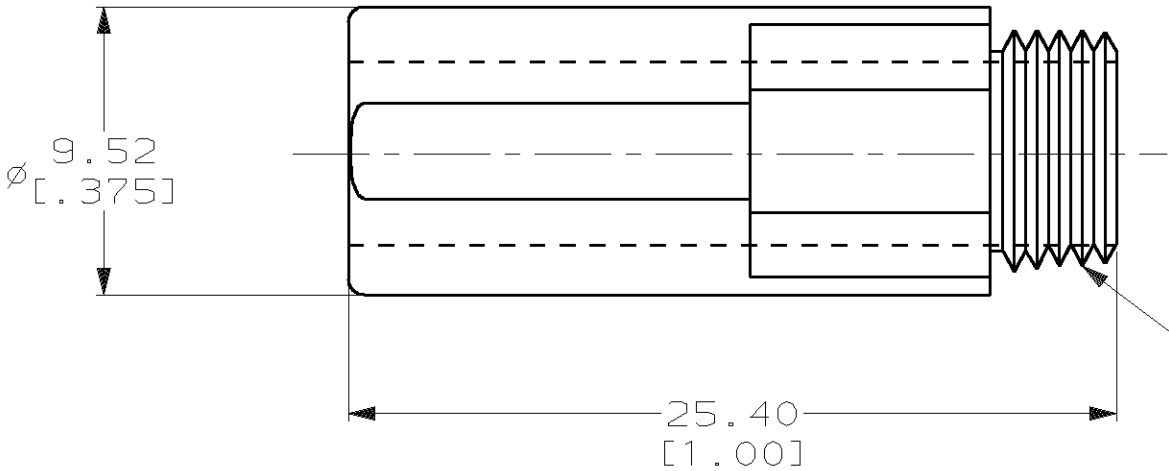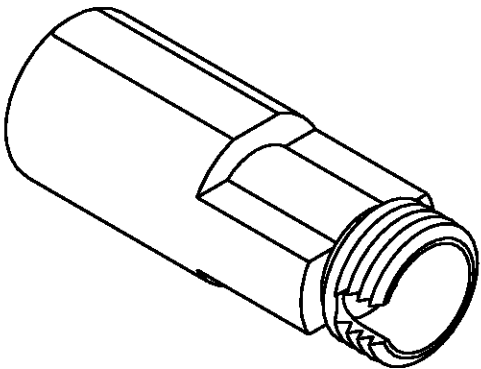

M8 X 0.75 6e

6	502862-2
1	502862-1
QUANTITY	PART NUMBER

			PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± 0.25 [.01] 3 PLC DEC ± 0.12 [.005] ANGLES ± -	DR 7-19-91 T.ALEXANDER	AMP AMP INCORPORATED Harrisburg, Pa. 17105		
	CHK 7-31-91 B.BRIGGS			
	APPD 8-1-91 N.MILLER	COVER, THREADED CONNECTORS		
	APPD 8-6-91 K.MONROE			
MATERIAL THERMOPLASTIC	PRODUCT SPEC -	SIZE B	FSCM NO 00779	DRAWING NO 502862
FINISH -	APPLICATION SPEC -	SCALE 4:1	SHEET 1 OF 1	
	WEIGHT -			