




Features

- Used to transport or store ESD Sensitive items inside an ESD protected area
- Nesting saves space when storing totes
- Great container for Kanban

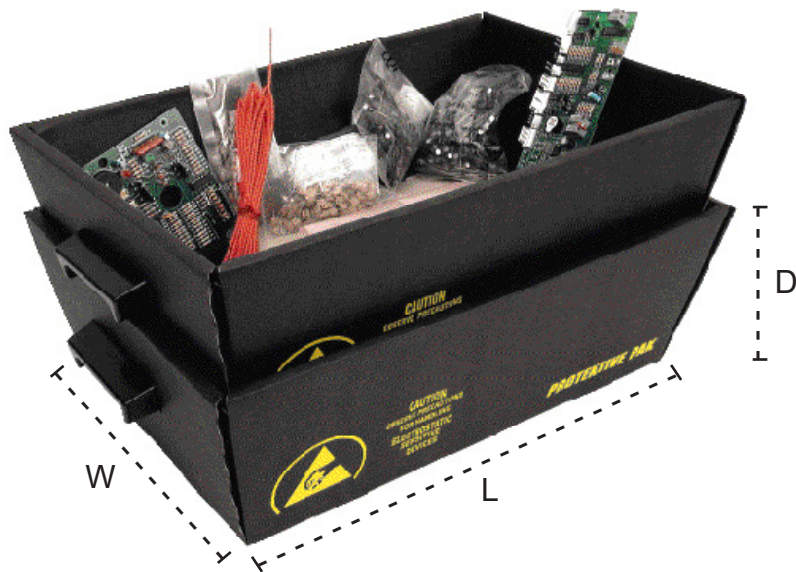

Item No.	O.D. Top Size - L x W x D	I.D. Bottom Size - L x W x D
37620*	12 x 9 x 4	8-3/4 x 5-3/4 x 4
37621	18 x 12 x 6	15 x 8-3/4 x 6
37622	27-1/4 x 12 x 6	24-1/2 x 8-3/4 x 6
37623	27-1/4 x 18 x 6	24-1/2 x 15 x 6

* Not available with handles, assembly required

Meets the required limits of ANSI/ESD S20.20, and Packaging standard ANSI/ESD S541.

SPECIFICATIONS

Properties

Surface Resistance

Sloughing Test

Recyclability

Typical Values

1×10^6 to $< 1 \times 10^9$ ohms

Negligible surface damage at 10 cycles and <5% of surface damage at 200 cycles in Taber Abrasion Test.

No conductive particles abraded from surface

Complete recyclability of package

Test Procedures/Method

ANSI/ESD STM11.11

ASTM D4060 at 70 rpm with CS-17 abrasive-coated wheels and 1000 grams load

Rockwell International Test Report of January 8, 1992

Rockwell International Test Report of January 8, 1992

RoHS, REACH, and Conflict Minerals Statement

See the Desco Industries RoHS, Reach, and Conflic Minerals Statement: <http://www.descoindustries.com/ROHS.aspx>

See the Protektive Pak Limited Warranty:

<http://protektivepak.descoindustries.com/Limited-Warranty.aspx>



Made in the
United States of America

Specifications and procedures subject to change without notice

NESTING TOTES

PROTEKTIVE PAK

13520 MONTE VISTA AVENUE, CHINO, CA 91710

PHONE (909) 627-2578

www.protektivepak.com

DRAWING NUMBER

37620

DATE:

December
2024

PROTEKTIVE PAK
BURIED SHIELDING LAYER