


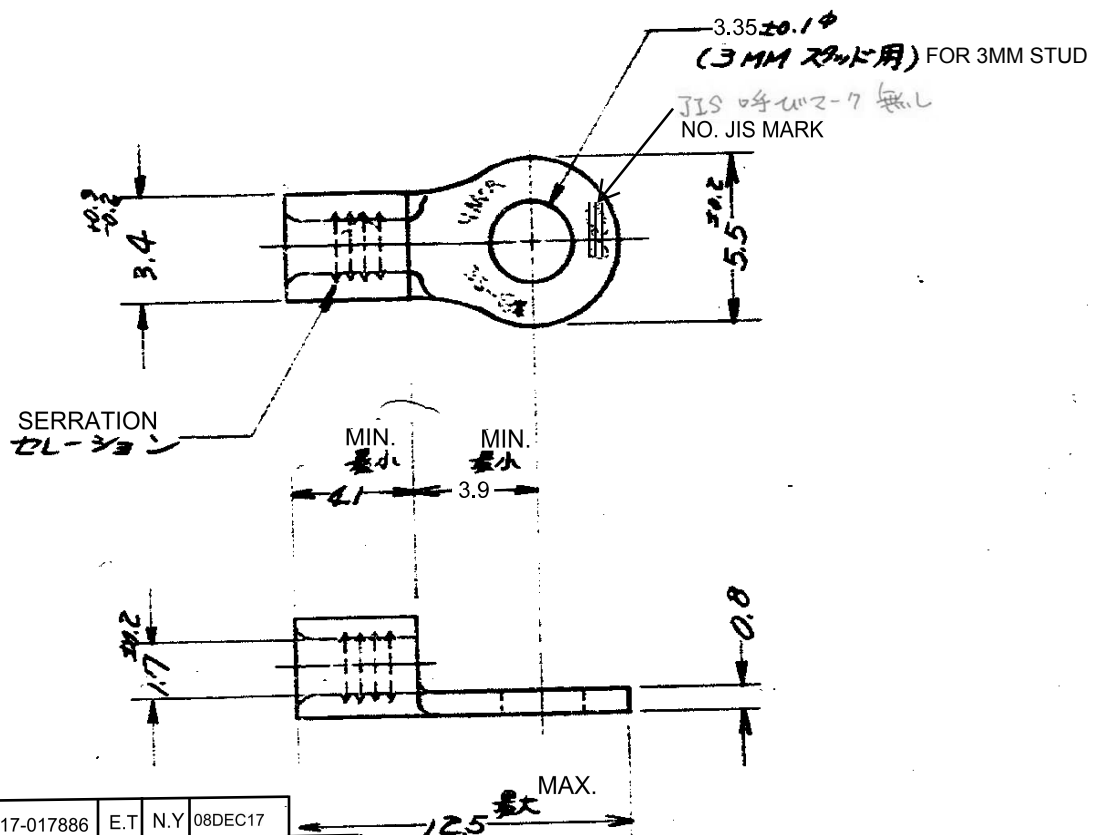

- 1. UL規格製品として使用する場合は電線サイズを AWG #22-18 (1.26~1.04mm²) とする。
- 1. IN CASE OF USE AS UL CERTIFIED PRODUCT USE WIRE AT AWG #22-18(1.26~1.04MM²)

-1: AS SHOWN
-1 本図

N	REVISED PER ECR-17-017886	E.T	N.Y	08DEC17
M	REVISED PER ECR-17-007066	T.G	N.Y	26MAY17
L	Change Applicable Body	Y.O	N.Y	23JAN17
K	DELETE MARK (P-DWG REV. A)	Y.J	Y.K	7/1/82
K	Revised (P-DWG REV. A)	Y.J	Y.K	6/4/82
J	REVISED (P-DWG REV. A)	S.O	Y.K	1/16/87
H	CHANGE WIRE & ADD MARK	Y.J	Y.K	3/1/82
G	REVISED (P-DWG REV. A)	H.S	Y.K	3/1/82
F	REVISED (P-DWG REV. A)	Y.K	Y.K	7/1/82
E	ADDED * MARK (P-DWG REV. A)	Y.K	Y.K	7/1/82
E	REVISED (P-DWG REV. A)	Y.K	Y.K	7/1/82
D	REVISED (P-DWG REV. A)	T.A	Y.K	5/10/82
C	ADD JIS 2-7 (P-DWG REV. A)	Y.K	Y.K	3/1/82
B	REVISED (P-DWG REV. A)	Y.K	Y.K	7/1/82
A	DELETE MARK (P-DWG REV. A)	Y.K	Y.K	7/1/82
O	RELEASED (P-DWG REV. A)	Y.K	Y.K	7/1/82
LTR	REVISION RECORD	DR	CHK	DATE
DR	K. Kobayashi	DE		3/15/70
CHK	P. K. Hartman	CHK		3/15/70

MATERIAL 電線銅		COPPER	
FINISH ANNEAL TIN PLATING		焼鈍し 錫めっき	
WIRE RANGE 0.25~1.65		AWG	
INSULATION DIA		TYPE SOLISTRAND	
TOL. 4-1		LOC. J A	
SCALE 4-1		SIZE C-170720	
REV. N		REV. N	
WIRE TERMINAL ASSEMBLY			

単位: 1mm DIMENSIONS IN MM. DO NOT SCALE PRINT

PRINT LIST 4 C