


# ST 35 BU

Order No.: 3036181

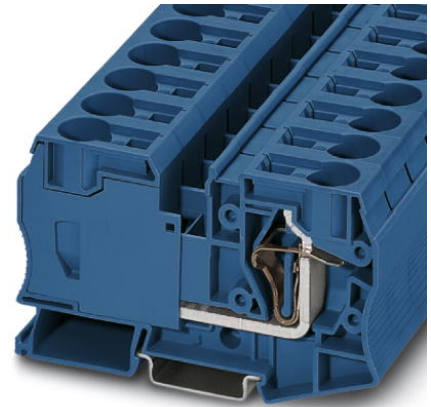

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3036181>

Feed-through modular terminal block, Type of connection: Spring-cage connection, Cross section: 2.5 mm<sup>2</sup> - 35 mm<sup>2</sup>, AWG 14 - 2, Width: 16 mm, Color: blue, Mounting type: NS 35/7.5, NS 35/15

## Commercial data

|                          |                                                                                     |
|--------------------------|-------------------------------------------------------------------------------------|
| GTIN (EAN)               |  |
| sales group              | A600                                                                                |
| Pack                     | 10 pcs.                                                                             |
| Customs tariff           | 85369010                                                                            |
| Catalog page information | Page 77 (CL-2009)                                                                   |

## Product notes

WEEE/RoHS-compliant since: 01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

### General

|                       |      |
|-----------------------|------|
| Number of levels      | 1    |
| Number of connections | 2    |
| Color                 | blue |
| Insulating material   | PA   |

|                                    |    |
|------------------------------------|----|
| Inflammability class acc. to UL 94 | V0 |
|------------------------------------|----|

**Dimensions**

|                  |         |
|------------------|---------|
| Width            | 16 mm   |
| Length           | 100 mm  |
| Height NS 35/7.5 | 59 mm   |
| Height NS 35/15  | 66.5 mm |

**Technical data**

|                                  |                                                         |
|----------------------------------|---------------------------------------------------------|
| Maximum load current             | 125 A (with 35 mm <sup>2</sup> conductor cross section) |
| Rated surge voltage              | 8 kV                                                    |
| Pollution degree                 | 3                                                       |
| Surge voltage category           | III                                                     |
| Insulating material group        | I                                                       |
| Connection in acc. with standard | IEC 60947-7-1                                           |
| Nominal current I <sub>N</sub>   | 125 A                                                   |
| Nominal voltage U <sub>N</sub>   | 1000 V                                                  |
| Open side panel                  | nein                                                    |

**Connection data**

|                                                                                         |                        |
|-----------------------------------------------------------------------------------------|------------------------|
| Conductor cross section solid min.                                                      | 2.5 mm <sup>2</sup>    |
| Conductor cross section solid max.                                                      | 35 mm <sup>2</sup>     |
| Conductor cross section stranded min.                                                   | 2.5 mm <sup>2</sup>    |
| Conductor cross section stranded max.                                                   | 35 mm <sup>2</sup>     |
| Conductor cross section AWG/kcmil min.                                                  | 14                     |
| Conductor cross section AWG/kcmil max                                                   | 2                      |
| Conductor cross section stranded, with ferrule without plastic sleeve min.              | 2.5 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule without plastic sleeve max.              | 35 mm <sup>2</sup>     |
| Conductor cross section stranded, with ferrule with plastic sleeve min.                 | 2.5 mm <sup>2</sup>    |
| Conductor cross section stranded, with ferrule with plastic sleeve max.                 | 35 mm <sup>2</sup>     |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 2.5 mm <sup>2</sup>    |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 10 mm <sup>2</sup>     |
| Type of connection                                                                      | Spring-cage connection |

|                           |       |
|---------------------------|-------|
| Stripping length          | 25 mm |
| Internal cylindrical gage | A8    |

#### Certificates / Approvals



Certification

BV, CB, CSA, CUL, DNV, GL, GOST, KR, LR, NK, UL, VDE-PZI

Certification Ex:

IECEX, KEMA-EX

#### Accessories

| Item           | Designation             | Description                                                                                                                                                                  |
|----------------|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Bridges</b> |                         |                                                                                                                                                                              |
| 3005963        | FBS 2-16                | Plug-in bridge, Number of positions: 2, Color: red                                                                                                                           |
| 3030899        | RB ST 35-(2,5/4)        | Reducing bridge, Number of positions: 2, Color: red                                                                                                                          |
| <b>Marking</b> |                         |                                                                                                                                                                              |
| 1053001        | ZB 10:UNBEDRUCKT        | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, sufficient for 100 terminal blocks, for a terminal width of 10.2 mm, color: White |
| 1053124        | ZB10,LGS:1-9            | Zack strip, printed horizontally: 9-section, with the numbers 1 - 9, color: white                                                                                            |
| 1053014        | ZB10,LGS:FORTL.ZAHLEN   | Zack strip, 10-section, printed horizontally: with the numbers, 1-10, 11-20 etc. up to 991-1000, color: white                                                                |
| 1053030        | ZB10,LGS:GLEICHE ZAHLEN | Zack strip, 10-section, printed horizontally: with identical numbers, 1/1/1, 2/2/2 etc. up to 100/100/100, color: white                                                      |
| 1053412        | ZB10,LGS:L1-N,PE        | Zack strip, printed horizontally, strips with 10 labels, L1, L2, L3, N, PE, L1, L2, L3, N, PE, color: white                                                                  |
| 1053438        | ZB10,LGS:U-N            | Zack marker strip, printed horizontally, strips with 10 labels, U, V, W, N, GND, U, V, W, N, GND, color: White                                                               |
| 1053027        | ZB10,QR:FORTL.ZAHLEN    | Zack strip, 10-section, printed vertically: with consecutive numbers, 1-10, 11-20 a.s.o. up to 991-1000, color: white                                                        |
| 1053043        | ZB10,QR:GLEICHE ZAHLEN  | Zack strip, 10-section, printed vertically: with identical numbers, 1/1/1, 2/2/2 etc. up to 100/100/100, color: white                                                        |
| 5062535        | ZB10/BU-100:UNBEDRUCKT  | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: blue            |

|         |                        |                                                                                                                                                                                                     |
|---------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5062548 | ZB10/GN-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: green                                  |
| 5060883 | ZB10/WH-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 10.2 mm, color: White |
| 5062564 | ZB10/YE-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, color: yellow                                 |
| 1050525 | ZB10:SO/CMS            | Zack strip, 10-section, divisible, special printing, marking according to customer requirements                                                                                                     |
| 0800734 | ZBFM 8/WH:UNBEDRUCKT   | Zack marker sheet, flat, unprinted: 50-section, 10 strips à 5 markers, sufficient for 50 terminal blocks, for all terminal blocks, pitch 8.2 mm, labeling with M-PEN or CMS system, color: white    |
| 0804934 | ZBFM 8:SO/CMS          | Special printing, Zack marker sheet, flat, 50-section, divisible, marking according to customer requirements                                                                                        |

**Plug/Adapter**

|         |           |                                  |
|---------|-----------|----------------------------------|
| 0201731 | MPS-IH BK | Insulating sleeve, Color: black  |
| 0201689 | MPS-IH BU | Insulating sleeve, Color: blue   |
| 0201702 | MPS-IH GN | Insulating sleeve, Color: green  |
| 0201728 | MPS-IH GY | Insulating sleeve, Color: gray   |
| 0201676 | MPS-IH RD | Insulating sleeve, Color: red    |
| 0201715 | MPS-IH VT | Insulating sleeve, Color: violet |
| 0201663 | MPS-IH WH | Insulating sleeve, Color: white  |
| 0201692 | MPS-IH YE | Insulating sleeve, Color: yellow |
| 0201744 | MPS-MT    | Test plugs                       |

**Tools**

|         |               |                                                                                                                                                       |
|---------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1206612 | SZF 3-1,0X5,5 | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 1.0 x 5.5 x 150 mm, 2-component grip, with non-slip grip |
|---------|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachsmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;