



Copyright FCI.

PRODUCT NUMBER

XXXXX-YYY HTLF

LEAD FREE OPTION
SEE NOTE 1,11


TUBE PACKAGING OPTION
SEE NOTE 1

HIGH TEMPERATURE PLASTIC
SEE NOTE 1


NO OF
POSITIONS
SEE NOTE 1

PIN PLATING
SEE SHEET 2


BASE PART NO.

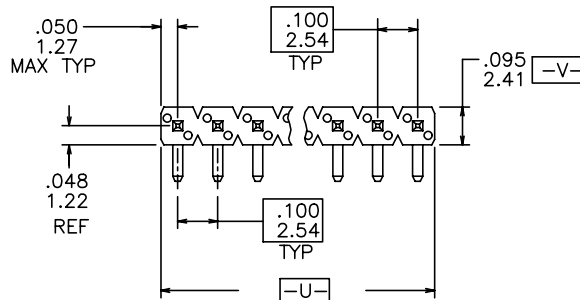

TOP VIEW

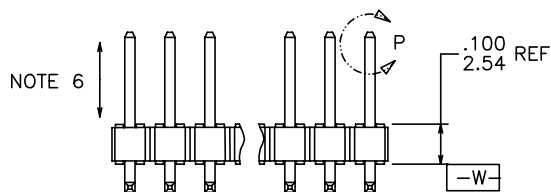

SIDE VIEW

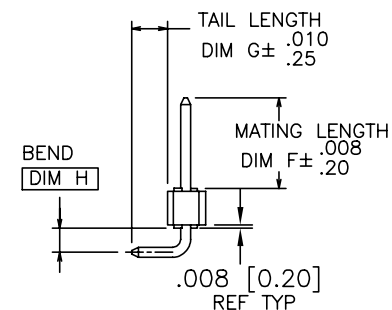

END VIEW

Ø .020/0.51 (M) U (M) V (S) W

NOTE 4

.025 ± .001
0.64 ± 0.03 TYP

.013
0.33 MAX TYP

25° ± 5° TYP
4 SIDES

DETAIL P
TYP BOTH ENDS

rev	ecn no	dr	date
AK	ELX-N-16105	ZK	2013-10-22
AL	ELX-N-17149	ZK	2014-03-07
CU	M05-0072	MHT	5/03/05
CV	M06-0435	MHT	10/31/06
AH	M08-0291	MHT	10/06/08
AJ	N11-0118	J.Z	2011-04-11

www.fciconnect.com			surface 6.4 ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		INCH/MM 						
			TOLERANCES UNLESS		OTHERWISE SPECIFIED										
Dr	D.WHITING	04/07/93	ANGULAR		LINEAR	0.X	±0.3	size A4	Scale 1.000						
Eng	T.HANNA	04/07/93				0.XX	±0.15								
Chr	T.HANNA	04/07/93	0° ±2°			0.XXX	±0.05		ECN						
Appr	T.HANNA	04/07/93	Product family			BERGSTIK		Spec ref							
		title				BERGSTIK® II HEADER				dwg no		69191		Rev AL	
						.100 SR R/A SELF-RET									
		catalog no								CUSTOMER		sheet 1 of 4			

PIN PLATING CODES:

XXXX-1YY	30u"/0.76u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-2YY	15u"/0.38u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-3YY	50u"/1.27u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-4YY	100u"/2.54u MIN Sn OVER 50u"/1.27u MIN Ni (SEE NOTE 1,13)
XXXX-4YYHLF	
XXXX-5YY	15u"/0.38u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-6YY	30u"/0.76u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-7YY	30u"/0.76u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-8YY	15u"/0.38u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-9YY	15u"/0.38u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni
XXXX-0YY	30u"/0.76u MIN (SEE NOTE 12) OVER 50u"/1.27u MIN Ni

NOTES

①. PART NUMBER OPTIONS:

PIN PLATING CODES (SEE ABOVE)

HIGH TEMP. MATERIAL:

FOR HIGH-TEMPERATURE APPLICATIONS, SPECIFY AN "H" AT THE END OF THE PART NUMBER, AND PCT WILL BE SUPPLIED.

NUMBER OF POSITION:

ANY NUMBER OF POSITIONS FROM 2 THRU 36.

PACKAGING:

PACKAGED IN POLY BAGS.

EIGHT DIGIT PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED IN TUBES. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

LEAD FREE:

ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE OPTION, NOT AVAILABLE FOR -5YY, -5YYH, -6YY & -6YYH.

②. BODY MATERIAL:

MANUFACTURER'S OPTION OF NYLON OR PCT, GLASS FIBER REINFORCED, FLAME RETARDANT PER UL-94V-0.

COLOR: BLACK, OR MINERAL FILLES LCP, COLOR BLACK FLAME RETARDANT PER UL-94V-0

PART NUMBERS WITH "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 20 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

PART NUMBERS WITHOUT "H" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR WAVE SOLDER PROCESS.

③. PIN MATERIAL: PHOS-BRONZE.

④. MEASURED WITH PART IN RESTRAINED CONDITION.

5. TWO SIDES OF PIN TIPS NOT PLATED, TYPICAL BOTH ENDS.

⑥. 2LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION.

⑦. ±.010/0.25 ON DIM "F" APPLIES TO THIS PART ONLY.

8. 5LB/2.3KG MAX INSERTION FORCE AND .25LB/.1KG MIN RETENTION FORCE PER RETENTIVE PIN USING .062/1.57 THICK CIRCUIT BOARDS AND RECOMMENDED HOLE PATTERN.

⑧. DETAIL N DIMENSIONS APPLY TO 2 POSITION PARTS ONLY

⑨. SECTION R-R DIMENSIONS ONLY APPLY TO RETENTION. PIN POSITIONS FOR 3 POSITION PARTS AND LARGER. RETENTION PIN POSITIONS LOCATED AT MANUFACTURES OPTION.

⑩. SECTION S-S DIMENSIONS APPLY TO DUAL RETENTION PIN POSITIONS ONLY. SEE PRODUCT PART NUMBER FOR SINGLE OR DUAL SIDE RETENTION. LOCATED AT MANUFACTURER'S OPTION.

⑪. THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

⑫. PLATING OPTIONS: PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON POST OR TAIL, OPTIONALLY (.78~2.95u"/2~7.5u) TIN ON TAIL.

⑬. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS."

.100±.003 [2.54±.08]
TYP. NON-ACCUMULATIVE


Ø.040±.003 [1.02±.08]
TYP.

RECOMMENDED HOLE PATTERN



www.fciconnect.com			surface ISO 1302		✓	tolerance std ISO 406 ISO 1101		projection 	INCH/MM 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr	D.WHITING	04/07/93	ANGULAR		LINEAR	0.X	±0.3	size A4	Scale 1.000	
Eng	T.HANNA	04/07/93				0.XX	±0.15			
Chr	T.HANNA	04/07/93				0°	±2°			0.XXX
Appr		T.HANNA	04/07/93		Product family			BERGSTIK	Spec ref	
		title	BERGSTIK® II HEADER					dwg no	69191	Rev. AL
			.100 SR R/A SELF-RET							
			catalog no							
			CUSTOMER					sheet 2 of 4		




Copyright FCI.

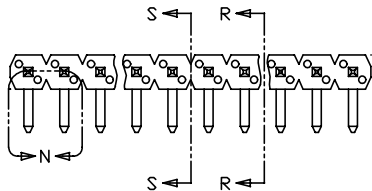


PDS. 2 ETC
PDS. 1

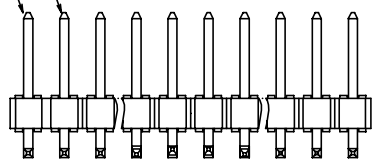

SECTION R-R
NOTE 9



SECTION S-S
NOTE 10



DETAIL N
NOTE 8

www.fciconnect.com			surface ISO 1302 ✓		tolerance std ISO 406 ISO 1101		projection 		INCH/MM 		
			TOLERANCES UNLESS OTHERWISE SPECIFIED								
Dr	D.WHITING	04/07/93	ANGULAR	LINEAR	0.X	±0.3	size A4	Scale 1.000			
Eng	T.HANNA	04/07/93			0.XX	±0.15					
Chr	T.HANNA	04/07/93			0.XXX	±0.05			ECN		
Appr	T.HANNA	04/07/93	Product family BERGSTIK				Spec ref				
		title BERGSTIK® II HEADER .100 SR R/A SELF-RET				dwg no 69191		Rev. AL			
		catalog no				CUSTOMER		sheet 3 of 4			

1

2

3

4

PRODUCT NUMBER	MATING LENGTH		TAIL LENGTH		BEND DIM		RETENTION	PACKAGING	NOTES	LF OPTION
	DIM F	DIM F	DIM G	DIM G	DIM H	DIM H				
	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	LOCATION			
69191-XY	0.230	5.84	0.120	3.05	0.060	1.52	G TAIL	POLY BAGS/TUBES	-	NOTE 1,11
72375-XYH	0.240	6.10	0.120	3.05	0.060	1.52	G TAIL	POLY BAGS	-	OB
78554-XY	0.318	8.08	0.120	3.05	0.060	1.52	G TAIL	POLY BAGS/TUBES	-	
78940-XY	0.120	3.05	0.120	3.05	0.060	1.52	F MATE & G TAIL	POLY BAGS	7	OB
78952-XY	0.120	3.05	0.318	8.08	0.135	3.43	F MATE	POLY BAGS	7	OB
79253-XY	U N A V A I L A B L E									
84825-XYH	0.354	9.00	0.102	2.60	0.060	1.52	G TAIL	POLY BAGS	-	OB
84851-XYH	0.140	3.56	0.290	7.37	0.153	3.89	G TAIL	POLY BAGS	-	OB
86641-XY	0.120	3.05	0.120	3.05	0.060	1.52	G TAIL	POLY BAGS	-	
87018-XY	U N A V A I L A B L E									
87844-XY	U N A V A I L A B L E									
87965-XY	U N A V A I L A B L E									
88869-XY	0.120	3.05	0.230	5.84	0.135	3.43	F MATE	POLY BAGS	7	OB
90304-XY	0.165	4.19	0.120	3.05	0.060	1.52	G TAIL	POLY BAGS	-	OB
90604-XY	U N A V A I L A B L E									
90609-XY	U N A V A I L A B L E									
90638-XY	0.120	3.05	0.262	6.65	0.060	1.52	F MATE	POLY BAGS/TUBES	7	OB
90640-XY	0.120	3.05	0.262	6.65	0.127	3.23	F MATE	POLY BAGS	7	OB
94669-XYH	0.230	5.84	0.085	2.16	0.060	1.52	G TAIL	POLY BAGS	-	OB
94670-XYH	0.400	10.16	0.085	2.16	0.060	1.52	G TAIL	POLY BAGS	-	OB
10100500-XYH	0.177	4.50	0.120	3.05	0.043	1.10	G TAIL	POLY BAGS	-	

NOTE 1,11

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB

OB