

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	—		H1	REVISED ECR-07-022187	19SEP2007	M.S
			H2	REVISED PER ECO-10-000443	12JAN10	KK

△1	OBSOLETE	215032-1	2-170823-9	SEE 7 OF 13
		246225	2-170823-8	SEE 2 OF 13
△1	OBSOLETE	238035-3	2-170823-7	SEE 10 OF 13
	OBSOLETE	235818	2-170823-5	SEE 12 OF 13
		234018-4	2-170823-4	SEE 13 OF 13
	OBSOLETE	234025-1	2-170823-3	
	△1 OBSOLETE	234030-1	2-170823-2	
	OBSOLETE	230032-1	2-170823-1	SEE 9 OF 13
		238035-2	2-170823-0	SEE 10 OF 13
		238035-1	1-170823-9	
		238032-1	1-170823-8	
△1	OBSOLETE	238020-1	1-170823-7	
		238038	1-170823-6	SEE 12 OF 13
		238035	1-170823-5	
		235825-1	1-170823-4	
		235822	1-170823-3	
		234018-2	1-170823-2	SEE 13 OF 13
		234018-1	1-170823-1	
		234030	1-170823-0	
		234018	170823-9	
		234016	170823-8	SEE 10 OF 13
△1	OBSOLETE	238060	170823-7	
		238048	170823-6	
		238032	170823-4	
		238020	170823-3	
		238025	170823-2	SEE 13 OF 13
		234025	170823-1	
		SHINAGAWA SHOKO PN	AMP PN	REMARK


		24623204	5-170823-8	SEE 2 OF 13
		248550	5-170823-7	SEE 3 OF 13
		246230	5-170823-6	SEE 2 OF 13
		234025-4	5-170823-4	SEE 13 OF 13
	OBSOLETE	234028	5-170823-3	
	OBSOLETE	224222	5-170823-1	SEE 8 OF 13
△1	OBSOLETE	246232-1	5-170823-0	SEE 2 OF 13
	OBSOLETE	238040	4-170823-9	SEE 10 OF 13
	OBSOLETE	238025-2	4-170823-8	
	OBSOLETE	238025-1	4-170823-7	
△1	OBSOLETE	234025-3	4-170823-6	SEE 13 OF 13
	OBSOLETE	234025-2	4-170823-5	
	OBSOLETE	248525	4-170823-4	SEE 3 OF 13
△1	OBSOLETE	215025W	4-170823-3	SEE 6 OF 13
	OBSOLETE	236525W	4-170823-2	SEE 5 OF 13
		236525	4-170823-1	SEE 11 OF 13
	OBSOLETE	234025W	4-170823-0	SEE 5 OF 13
		246232	3-170823-8	SEE 2 OF 13
	OBSOLETE	230025W	3-170823-7	SEE 4 OF 13
	OBSOLETE	238025W	3-170823-6	SEE 5 OF 13
	△1 OBSOLETE	215028	3-170823-5	SEE 7 OF 13
		224228	3-170823-4	SEE 8 OF 13
		215032W	3-170823-3	SEE 6 OF 13
	OBSOLETE	238032-3	3-170823-2	SEE 10 OF 13
	OBSOLETE	238032-2	3-170823-1	
		SHINAGAWA SHOKO PN	AMP PN	REMARK

X-170892-X	SEE 170892
X-170893-X	SEE 170893
X-170887-X	SEE 170887
X-170889-X	SEE 170889
X-170888-X	SEE 170888
X-170890-X	SEE 170890
X-170891-X	SEE 170891
AMP PN	REMARK

△1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. YAMAGUCHI 31AUG00		 Tyco Electronics AMP K.K. Kawasaki, Japan	
CHK D. MATSUURA 31AUG00		APVD K. BETSUI 31AUG00			
DIMENSIONS: 単位： 耗 MM				NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差				INSULATION SLEEVE	
		PRODUCT SPEC 製品規格		SIZE	
		APPLICATION SPEC 取付適用規格		CAGE CODE	
MATERIAL 材料		WEIGHT		DRAWING NO 番号	
		CUSTOMER DRAWING		A3 00779 C-170823	
		SCALE 尺度 1:1		SHEET 1 OF 13	
				REV H2	

LOC	DIST	REVISIONS 変更				
		P	LTR	DESCRIPTION		DATE
J	—			SEE SHEET 1		—
						—

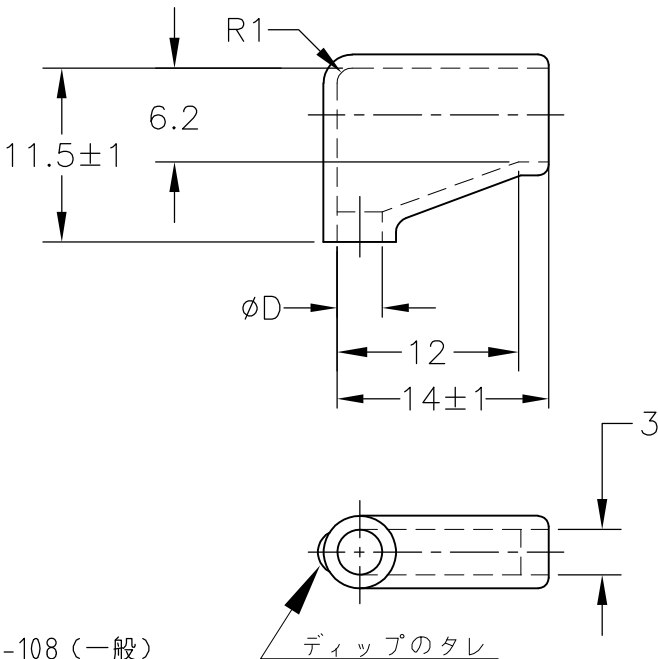


1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
△ 品川商工発行のカatalogと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称は旗型コネクトスリーブ187シリーズ

1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
△ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE FOR 187 SERIES
△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	BLACK	$1^{+0.3}_{-0.2}$	3.2	24623204	5-170823-8
	CLEAR		3	246230	5-170823-6
			3.2	246232-1	5-170823-0
			3.2	246232	3-170823-8
			2.5	246225	2-170823-8
	COLOR	THICKNESS	φ D	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料		FINISH 仕上			
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE					
	PRODUCT SPEC 製品規格	SIZE A4					
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC 取付適用規格	CAGE CODE 00779	DRAWING NO 番号 C-170823	RESTRICTED TO —			
WEIGHT		CUSTOMER DRAWING					
SCALE 尺度 2:1		SHEET 2 OF 13		REV H2			

LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		—	SEE SHEET 1	—	—	—

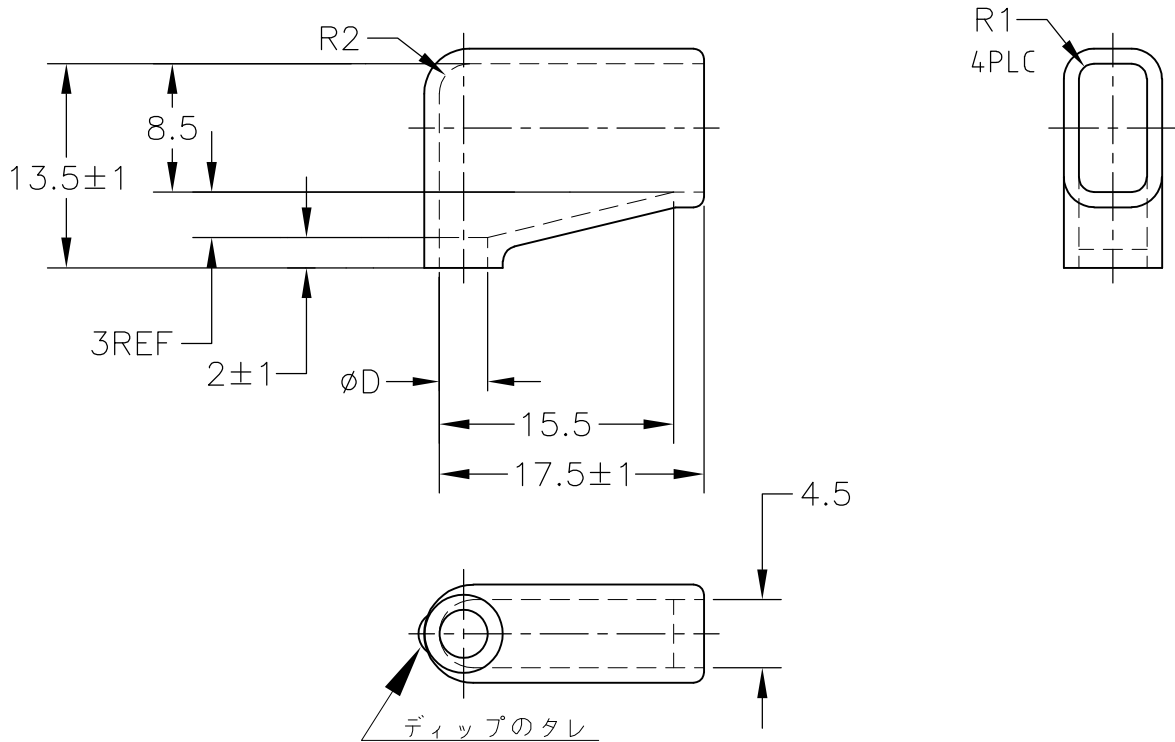


1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
- △ 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称は旗型コネクタスリーブ 250シリーズ

1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
- △ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE FOR 250 SERIES
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ 6	OBSOLETE	CLEAR	1±0.3	5	248550	5-170823-7
	OBSOLETE			2.5	248525	4-170823-4
	COLOR	THICKNESS	φ D	△ SHINAGAWA SHOKO PN	AMP PN	

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —	FINISH 仕上 —
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE	
	PRODUCT SPEC 製品規格 —	SIZE A4	CAGE CODE 00779
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC 取付適用規格 —	DRAWING NO 番号 C-170823	RESTRICTED TO —
WEIGHT —		SCALE 尺度 2:1	SHEET 3 OF 13
CUSTOMER DRAWING		REV H2	

LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		—	SEE SHEET 1	—	—	—

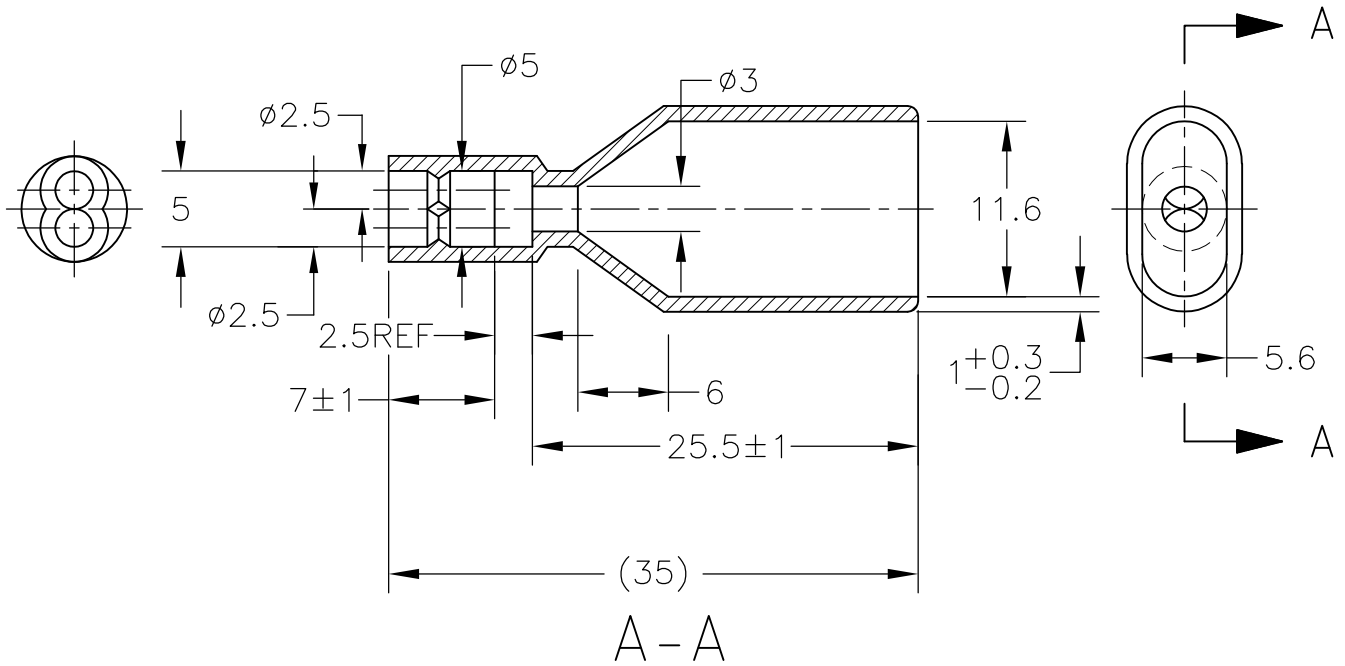


1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
4. 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称はコネクタスリーブ AMP00シリーズ

1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
4. IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE AMP00 SERIES

OBSOLETE	CLEAR	230025W	3-170823-7
	COLOR	SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料	FINISH 仕上
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE	
	PRODUCT SPEC 製品規格	SIZE A4	CAGE CODE 00779
0 PLC ± —	APPLICATION SPEC 取付適用規格	DRAWING NO 番号 C-170823	RESTRICTED TO —
1 PLC ± —	WEIGHT	SCALE 尺度 2:1	SHEET 4 OF 13
2 PLC ± —	CUSTOMER DRAWING		REV H2
3 PLC ± —			
4 PLC ± —			
ANGLES ± —			

LOC	DIST	REVISIONS 変更				
		P	LTR	DESCRIPTION		DATE
J	—			SEE SHEET 1		—

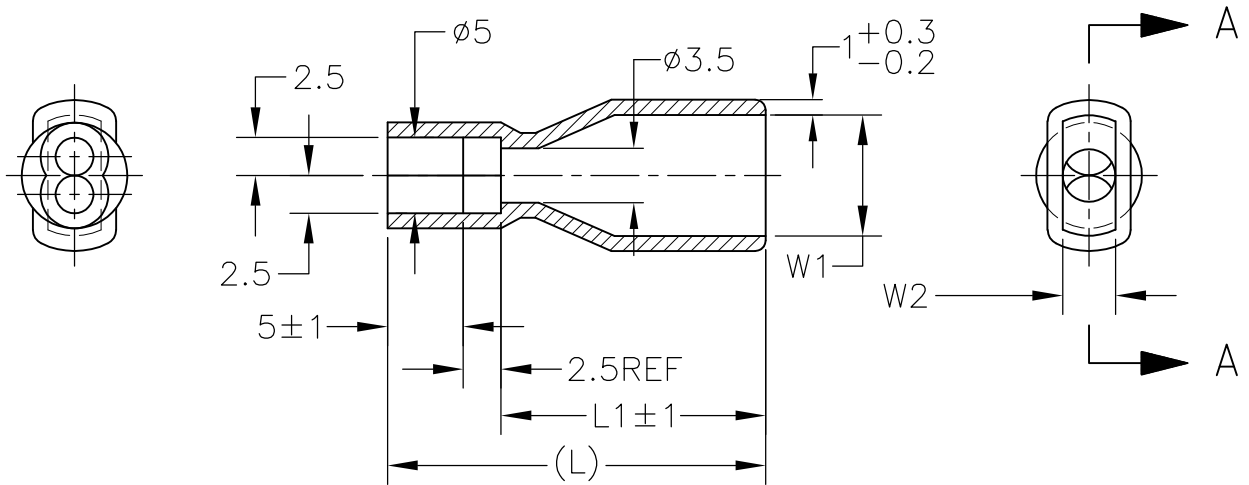

A-A

1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
- ④ 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称はコネクタスリーブ AMP00 シリーズ


1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
- ④ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE AMP00 SERIES

OBSOLETE	CLEAR	23	15.5	3	6.5	236525W	4-170823-2
OBSOLETE		21	13.5		4	234025W	4-170823-0
OBSOLETE		25	17.5	3.5	8	238025W	3-170823-6
	COLOR	L	L1	W2	W1	△ SHINAGAWA SHOKO PN	AMP PN



DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —	FINISH 仕上 —
	CHK D. MATSUURA 31AUG00	 Tyco Electronics AMP K.K. Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00		
0 PLC ± —	PRODUCT SPEC 製品規格 —	NAME 名称 INSULATION SLEEVE	
1 PLC ± —	APPLICATION SPEC 取付適用規格 —		
2 PLC ± —	WEIGHT —	SIZE A4	CAGE CODE 00779
3 PLC ± —		DRAWING NO 番号 C-170823	RESTRICTED TO —
4 PLC ± —		SCALE 尺度 2:1	
ANGLES ± —		SHEET 5	OF 13
			REV H2

CUSTOMER DRAWING

LOC	DIST	REVISIONS 変更				DATE	DWN	APVD
J	—	P	LTR	DESCRIPTION				
			—	SEE SHEET 1		—	—	—

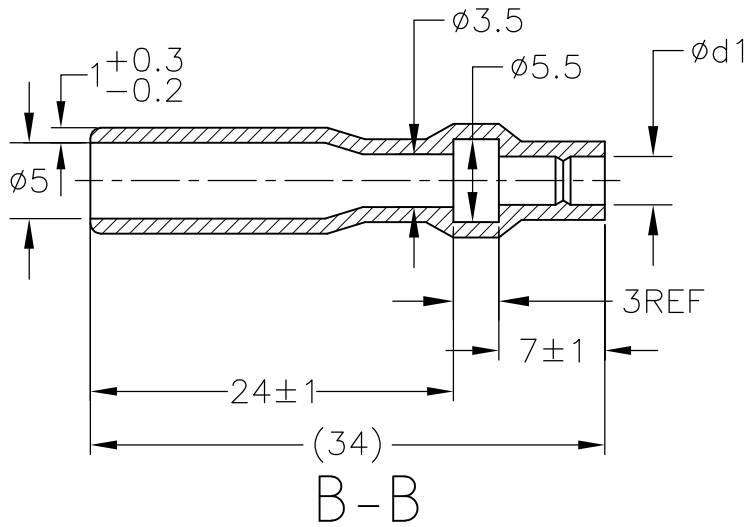


ROTATED CW 90°

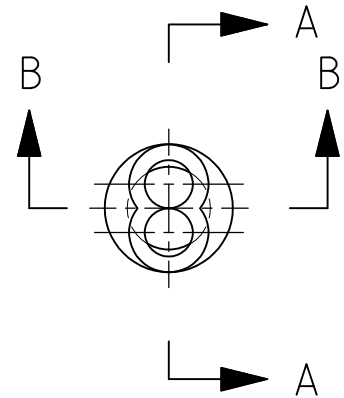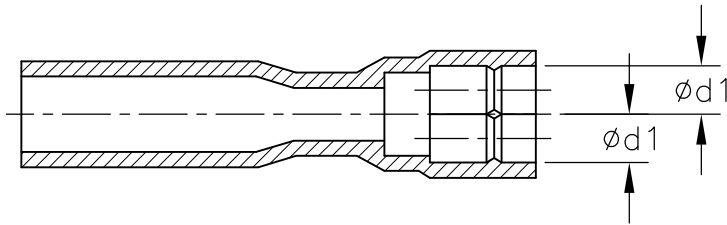

1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
4. 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称はコネクタスリーブ 5DIAシリーズシュワープラグ リセプタクル

1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
4. IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME : CONNECT SLEEVE 5DIA SERIES SHUR PLUG RECEPTACLE
6. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

 OBSOLETE	CLEAR	2.5	215025W	4-170823-3
		3.2	215032W	3-170823-3
	COLOR	ø d1	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —		FINISH 仕上 —			
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE					
	PRODUCT SPEC 製品規格 —	SIZE A4					
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —	APPLICATION SPEC 取付適用規格 —	CAGE CODE 00779	DRAWING NO 番号 C-170823	RESTRICTED TO —			
WEIGHT —		CUSTOMER DRAWING					
		SCALE 尺度 2:1	SHEET 6	OF 13	REV H2		

LOC J	DIST —	REVISIONS 変更					DATE —	DWN —	APVD —
		P	LTR	DESCRIPTION					
			—	SEE SHEET 1					

A - A

1. 材質：SS-108（一般）

2. 一般公差：±0.5

3. 適用製品規格は無し

△ 品川商工発行のカatalogと本図で寸法が異なる場合は本図を優先する。

5. この製品の名称はコネクタスリーブ 5DIA シリーズ シュワーププラグリセプタクル

1. MATERIAL:SS-108(GENERAL)

2. GENERAL TOLERANCE: ±0.5

3. APPLICABLE PRODUCT SPEC NOT AVAILABLE

△ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE 5DIA SERIES SHUR PLUG RECEPTACLE

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	CLEAR	33	6	24.5	2.8	215028	3-170823-5
		47	7	37.5	3.2	215032-1	2-170823-9
	COLOR	L	L2	L1	φD	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS:
単位： 耗
MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0 PLC	± —
1 PLC	± —
2 PLC	± —
3 PLC	± —
4 PLC	± —
ANGLES	± —

DWN
A. YAMAGUCHI
31AUG00

CHK
D. MATSUURA
31AUG00

APVD
K. BETSUI
31AUG00

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT

MATERIAL
材料

FINISH
仕上

Tyco Electronics
Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
名称
INSULATION SLEEVE

SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-170823	RESTRICTED TO —
------------	--------------------	------------------------------	--------------------


CUSTOMER DRAWING

SCALE
尺度
2:1

SHEET
7 OF
13

REV
H2

LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		—	SEE SHEET 1	—	—	—

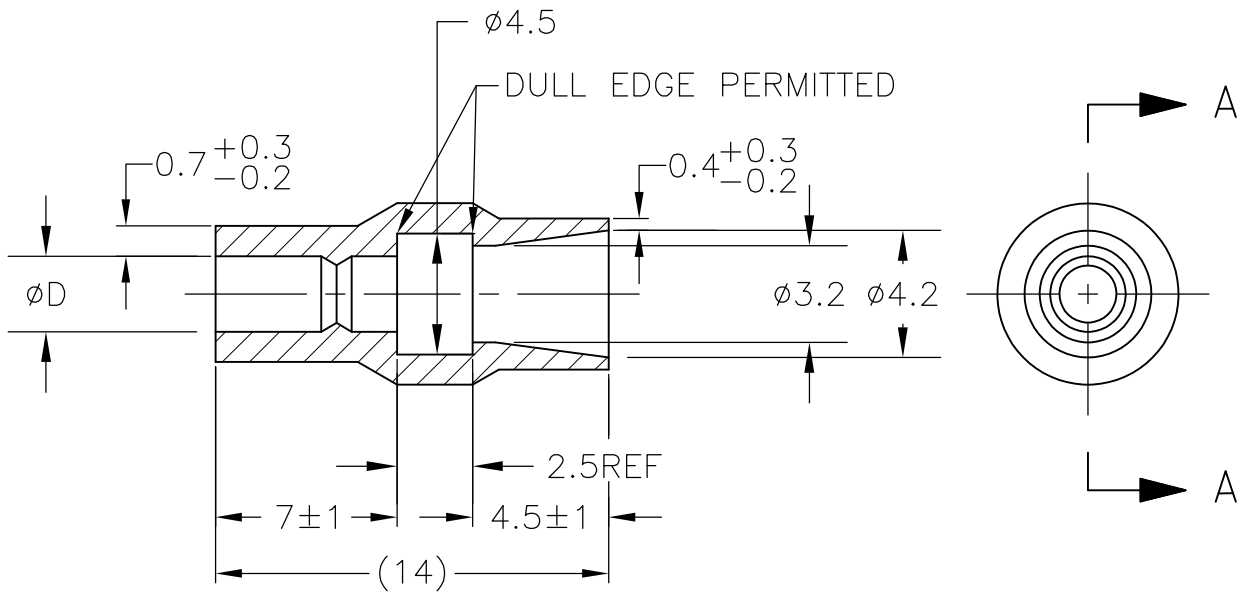

A-A


1. 材質：SS-108（一般）
2. 一般公差：±0.5
3. 適用製品規格は無し
- △ 品川商工発行のカatalogと本図で寸法が異なる場合は本図を優先する。
5. この製品の名称はコネクタスリーブ 5DIAシリーズシュワープラグ

1. MATERIAL:SS-108(GENERAL)
2. GENERAL TOLERANCE: ±0.5
3. APPLICABLE PRODUCT SPEC NOT AVAILABLE
- △ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
5. THIS PRODUCT NAME CONNECT SLEEVE 5DIA SERIES SHUR PLUG
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△ OBSOLETE	OBSOLETE	CLEAR	2.2	224222	5-170823-1
	OBSOLETE		2.8	224228	3-170823-4
		COLOR	φ D	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM		DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —		FINISH 仕上 —
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		CHK D. MATSUURA 31AUG00	 Tyco Electronics AMP K.K. Kawasaki, Japan		
0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		APVD K. BETSUI 31AUG00			
		PRODUCT SPEC 製品規格 —	NAME 名称 INSULATION SLEEVE		
		APPLICATION SPEC 取付適用規格 —			
		WEIGHT —	SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-170823
			RESTRICTED TO —		
CUSTOMER DRAWING		SCALE 尺度 4:1		SHEET 8	OF 13
				REV H2	

LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		—	SEE SHEET 1	—	—	—

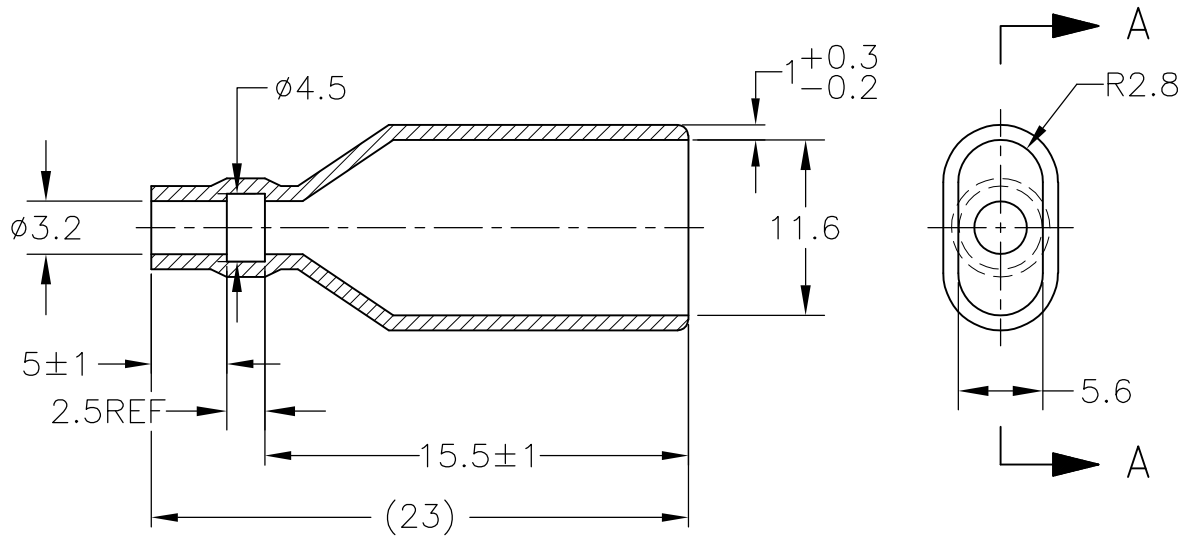

A-A

1. 材質：SS-108（一般）

2. 一般公差：±0.5

3. 適用製品規格は無し

△4 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。

5. この製品の名称はコネクタスリーブ AMP00シリーズ

1. MATERIAL:SS-108(GENERAL)

2. GENERAL TOLERANCE: ±0.5

3. APPLICABLE PRODUCT SPEC NOT AVAILABLE


△4 IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE AMP00 SERIES


△6 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△6 OBSOLETE	CLEAR	230032-1	2-170823-1
	COLOR	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —	FINISH 仕上 —
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE	
	PRODUCT SPEC 製品規格 —	SIZE A4	CAGE CODE 00779
0 PLC ± —	APPLICATION SPEC 取付適用規格 —	DRAWING NO 番号 C-170823	RESTRICTED TO —
1 PLC ± —	WEIGHT —	SCALE 尺度 2:1	SHEET 9 OF 13
2 PLC ± —	CUSTOMER DRAWING		REV H2
3 PLC ± —			
4 PLC ± —			
ANGLES ± —			



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	—		—	SEE SHEET 1	—	—

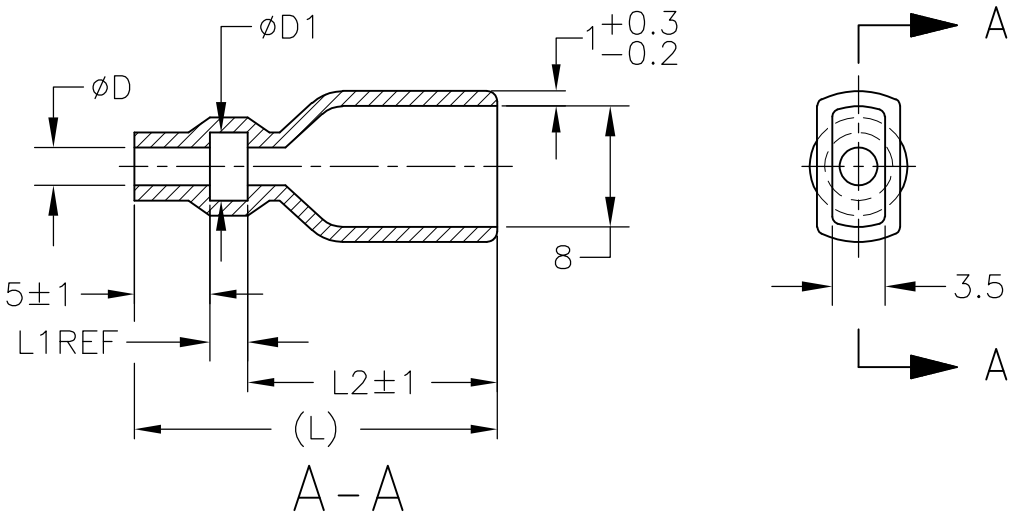

1. 材質：SS-108（一般）

2. 一般公差：±0.5

3. 適用製品規格は無し

⚠ 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
1. MATERIAL:SS-108(GENERAL)

2. GENERAL TOLERANCE：±0.5

3. APPLICABLE PRODUCT SPEC NOT AVAILABLE

⚠ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	YELLOW	24	16.5	2.5	4.5	2.5	238025-2	4-170823-8
OBSOLETE	RED					2.5	238025-1	4-170823-7
OBSOLETE	CLEAR	25	17.5	3	5	4	238040	4-170823-9
OBSOLETE	BROWN	24.5	17.0	2.5	4.7	3.2	238032-3	3-170823-2
OBSOLETE	BLUE						238032-2	3-170823-1
⚠ OBSOLETE	CLEAR	40.5	32.5	3	4.5	3.5	238035-3	2-170823-7
							238035-2	2-170823-0
							238035-1	1-170823-9
		27	19.5	2.5	4.7	3.2	238032-1	1-170823-8
⚠ OBSOLETE		45	37.5	3	3.2	2	238020-1	4-170823-7
		25	17.5	2.5	5.3	3.8	238038	1-170823-6
		24	16.0	3	4.5	3.5	238035	1-170823-5
⚠ OBSOLETE		27	19.5	2.5	7.5	6	238060	170823-7
		25	17.5		6.3	4.8	238048	170823-6
		24	16.5		4.7	3.2	238032	170823-4
			16.0	3	3.2	2	238020	170823-3
				3	4.5	2.5	238025	170823-2
	COLOR	L	L2	L1	$\phi D1$	ϕD	SHINAGAWA SHOKO PN	AMP PN

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位： 耗
MM

MATERIAL
材料

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH
仕上

DWN
A. YAMAGUCHI
31AUG00

CHK
D. MATSUURA
31AUG02

APVD
K. BETSUI
31AUG02

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT
—

CUSTOMER DRAWING

Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
名称

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-170823


RESTRICTED TO
—

SCALE
尺度 2:1

SHEET
10 OF 13

REV
H2

LOC	DIST	REVISIONS 変更					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		—	SEE SHEET 1	—	—	—

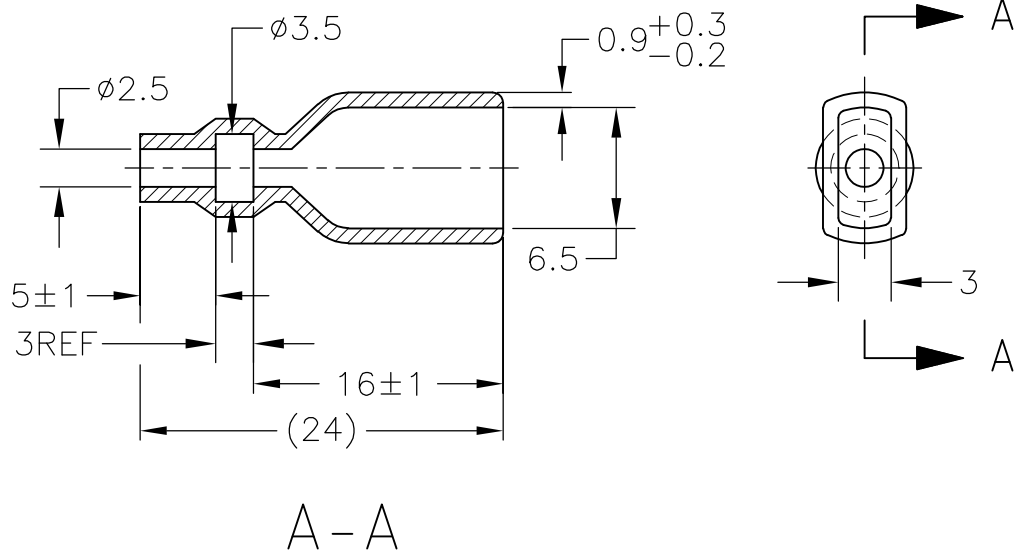

1. 材質：SS-108（一般）

2. 一般公差：±0.5

3. 適用製品規格は無し

△ 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。

5. この製品の名称はコネクタスリーブ AMP205シリーズ

1. MATERIAL:SS-108(GENERAL)

2. GENERAL TOLERANCE: ±0.5

3. APPLICABLE PRODUCT SPEC NOT AVAILABLE


△ IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

5. THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE AMP205 SERIES

CLEAR	236525	4-170823-1
COLOR	△ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —	FINISH 仕上 —		
	CHK D. MATSUURA 31AUG00	Tyco Electronics AMP K.K. Kawasaki, Japan			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE			
	PRODUCT SPEC 製品規格 —	SIZE A4			
0 PLC ± —	APPLICATION SPEC 取付適用規格 —	CAGE CODE 00779	DRAWING NO 番号 C-170823		
1 PLC ± —	WEIGHT —	RESTRICTED TO —			
2 PLC ± —	CUSTOMER DRAWING				
3 PLC ± —	SCALE 尺度 2:1				
4 PLC ± —	SHEET 11 OF 13				
ANGLES ± —	REV H2				

LOC	DIST	REVISIONS 変更							
		P	LTR	DESCRIPTION			DATE	DWN	APVD
J	—		—	SEE SHEET 1			—	—	—

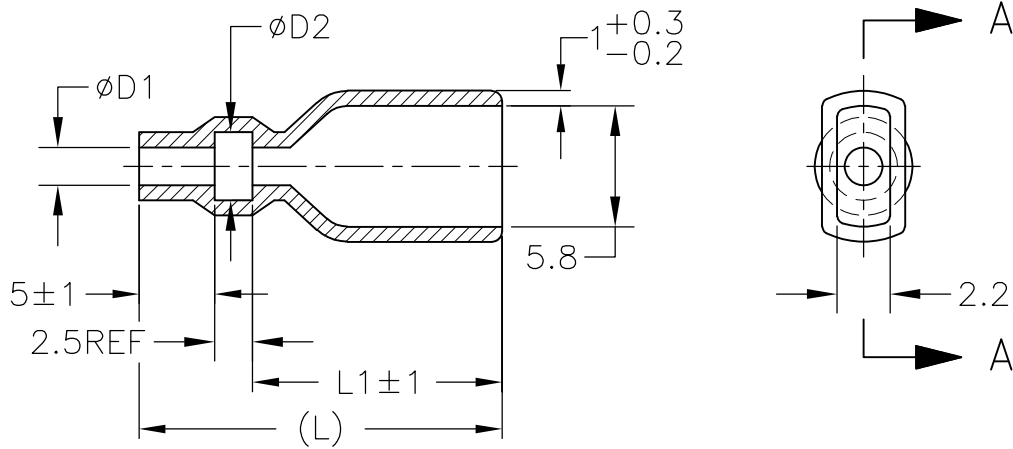

A-A


- 材質：SS-108（一般）
- 一般公差： ± 0.5
- 適用製品規格は無し
- 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
- この製品の名称はコネクタスリーブ AMP187シリーズ

- MATERIAL:SS-108(GENERAL)
- GENERAL TOLERANCE: ± 0.5
- APPLICABLE PRODUCT SPEC NOT AVAILABLE
- IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE
- THIS PRODUCT NAME FLAG TYPE CONNECT SLEEVE AMP187 SERIES
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

$\triangle$ OBSOLETE	CLEAR	23	15.5	3.3	1.8	235818	2-170823-5
		20	12.5	3.5	2.5	235825-1	1-170823-4
		23	15.5	3.7	2.2	235822	1-170823-3
	COLOR	L	L1	$\phi D2$	$\phi D1$	$\triangle$ SHINAGAWA SHOKO PN	AMP PN

DIMENSIONS: 単位： 耗 MM	DWN A. YAMAGUCHI 31AUG00	MATERIAL 材料 —	FINISH 仕上 —
	CHK D. MATSUURA 31AUG00	Tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差	APVD K. BETSUI 31AUG00	NAME 名称 INSULATION SLEEVE	
	PRODUCT SPEC 製品規格 —	SIZE A4	CAGE CODE 00779
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	APPLICATION SPEC 取付適用規格 —	DRAWING NO 番号 C-170823	RESTRICTED TO —
	WEIGHT —	SCALE 尺度 2:1	SHEET 12 OF 13
CUSTOMER DRAWING		REV H2	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	—		—	SEE SHEET 1	—	—

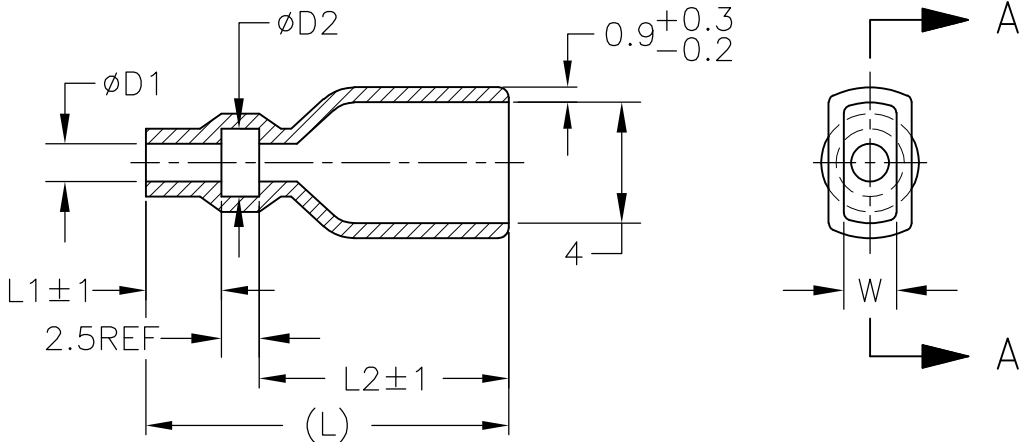

A-A

1. 材質：SS-108（一般）

2. 一般公差：±0.5

3. 適用製品規格は無し

△4 品川商工発行のカタログと本図で寸法が異なる場合は本図を優先する。
1. MATERIAL:SS-108(GENERAL)

2. GENERAL TOLERANCE: ±0.5

3. APPLICABLE PRODUCT SPEC NOT AVAILABLE

△4 IN THE EVENT OF CONFLICT BETWEEN THE REQUIREMENTS OF THIS CUSTOMER DRAWING AND THE SHINAGAWA SHOKO CO LTD CATALOG THIS CUSTOMER DRAWING SHALL TAKE PRECEDENCE

△5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

△5	OBSOLETE	CLEAR	37	29.5	5	3.5	2.5	2	234025-4	5-170823-4	
	OBSOLETE					4.3	2.8	2.1	234028	5-170823-3	
△5	OBSOLETE	YELLOW	21	13.5		3.5	2.5	2	234025-3	4-170823-6	
	OBSOLETE	RED							234025-2	4-170823-5	
		BLACK				3.3	1.8	2.1	234018-4	2-170823-4	
	OBSOLETE	CLEAR	23	15.5		3.5	2.5		234025-1	2-170823-3	
△5	OBSOLETE					3.8	3	2	234030-1	2-170823-2	
				30		22.5	3.4	1.8	2.1	234018-2	1-170823-2
			23	15.5		234018-1				1-170823-1	
			21	13.5		3.8	3	2	234030	1-170823-0	
			18	12.5	3	2.8	1.6	2.1	234016	170823-8	
			21	13.5	5	3.5	2.5		2	234025	170823-1
		COLOR	L	L2	L1	φ d2	φ d1	W	SHINAGAWA SHOKO PN	AMP PN	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位： 耗
MM

MATERIAL
材料

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0 PLC ± —

1 PLC ± —

2 PLC ± —

3 PLC ± —

4 PLC ± —

ANGLES ± —

FINISH
仕上

DWN
A. YAMAGUCHI
31AUG00

CHK
D. MATSUURA
31AUG02

APVD
K. BETSUI
31AUG02

PRODUCT SPEC
製品規格

APPLICATION SPEC
取付適用規格

WEIGHT
—

CUSTOMER DRAWING

Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
名称

INSULATION SLEEVE

SIZE
A3

CAGE CODE
00779

DRAWING NO
番号
C-170823

RESTRICTED TO
—

SCALE
尺度 2:1

SHEET
13 OF 13

REV
H2

AMP 1470-19 REV 31MAR2000