

FIBOX

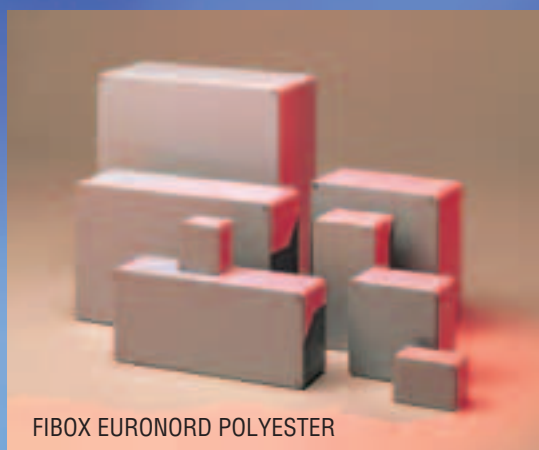
EURONORD

PC
ABS
ALUMINIUM
POLYESTER

FIBOX EURONORD




FIBOX EURONORD ALUMINIUM



FIBOX EURONORD POLYESTER

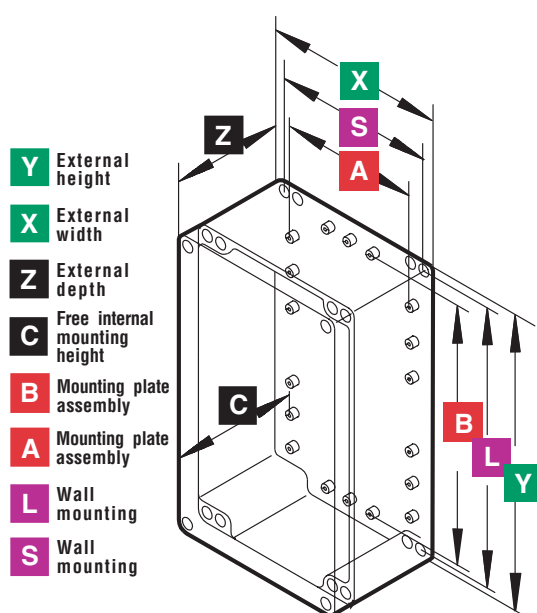
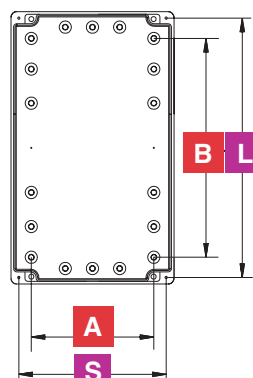

The FIBOX EURONORD range of enclosures is specifically designed for housing DIN-rail mounted terminal blocks. Additionally, these enclosures are excellent for packaging sensors for process control applications. FIBOX EURONORD enclosures are available moulded from polycarbonate, ABS or polyester (GRP). FIBOX EURONORD enclosures are also available in cast aluminium. The enclosures are rated EN 60529 IP 66/67.

FIBOX EURONORD II

FIBOX EURONORD II PC: IP66 / IP67, IK 08/IK 07 ABS: IP66 / IP67, IK 07	Z x C	GREY COVER AND TRANSPARENT COVER	
	B x A L x S mm	ORDER SYMBOL	
050504 Y x X 52 mm 50 mm 	Z / C 40 x 30 B 16.4 L x S 40 x 38	PC 050504 AB 050504	
050705 Y x X 65 mm 50 mm 	Z / C 45 x 35 B 38 L x S 53 x 38	PCT 050705 PC 050705 AB 050705	
080807 Y x X 82 mm 80 mm 	Z / C 65 x 53.5 B x A 58 x 43.5 L x S 70 x 50	PCT 080807 PC 080807 AB 080807	
081206 Y x X 120 mm 80 mm 	Z / C 55 x 42 B x A 81.5 x 58.0 L x S 108 x 50	PCT 081206 PC 081206 AB 081206	
081607 Y x X 160 mm 80 mm 	Z / C 65 x 54 B x A 121.5 x 58 L x S 148 x 50	PCT 081607 PC 081607 AB 081607	
081610 Y x X 160 mm 80 mm 	Z / C 95 x 84 B x A 121.5 x 58 L x S 148 x 50	PCT 081610 PC 081610 AB 081610	
121207 Y x X 122 mm 120 mm 	Z / C 65 x 54 B x A 98 x 83.5 L x S 110 x 90	PCT 121207 PC 121207 AB 121207	
121210 Y x X 122 mm 120 mm 	Z / C 95 x 84 B x A 98 x 83.5 L x S 110 x 90	PCT 121210 PC 121210 AB 121210	
121609 Y x X 160 mm 120 mm 	Z / C 90 x 78 B x A 90.5 x 120 L x S 148 x 88	PCT 121609 PC 121609 AB 121609	
122008 Y x X 200 mm 120 mm 	Z / C 75 x 62 B x A 160.5 x 90.5 L x S 188 x 89	PCT 122008 PC 122008 AB 122008	
152008 Y x X 201 mm 151 mm 	Z / C 80 x 68.5 B x A 160 x 118 L x S 189 x 118	PCT 152008 PC 152008 AB 152008	
162509 Y x X 250 mm 160 mm 	Z / C 90 x 78 B x A 201.5 x 138.5 L x S 238 x 130	PCT 162509 PC 162509 AB 162509	

External height **Y** External width **X** External depth **Z** Free internal mounting height **C** Mounting plate assembly **B** x **A** Wall mounting **L** x **S**

Including: Enclosure body, cover with PUR gasket, cover screws, and mounting screws. T= smoked transparent cover G= grey cover

TF 28037
fastening lug measures

SYMBOLS AND ABBREVIATIONS

PCT 05 07 05

L Height
 Length
 Width
 Enclosure type

PCT polycarbonate with transparent cover

PC polycarbonate with grey cover

AB ABS plastic

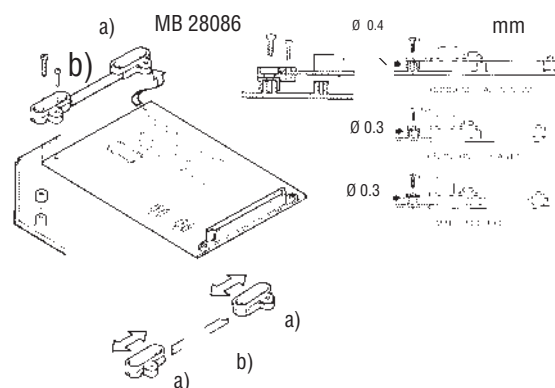
Al Aluminium

P polyester / fibreglass (GRP)

FIBOX EURONORD II PC: IP66 / IP67, IK 08/IK 07 ABS: IP66 / IP67, IK 07	Z x C B x A L x S mm	GREY COVER AND TRANSPARENT COVER	
		ORDER SYMBOL	
162513 Y x X 250 mm 160 mm 	Z / C 125 x 113 B x A 201.5 x 138.5 L x S 238 x 130	PCT 162513 PC 162513 AB 162513	
233009 Y x X 300 mm 230 mm 	Z / C 87 x 75 B x A 255 x 198 L x S 288 x 200	PCT 233009 PC 233009 AB 233009	
233011 Y x X 300 mm 230 mm 	Z / C 110 x 98 B x A 255 x 198 L x S 288 x 200	PCT 233011 PC 233011 AB 233011	

CIRCUIT BOARD BRACKET

Printed circuit boards and mounting plates often need special mounting supports that offer flexibility in positioning the boards across the enclosure body. Mounting supports also raise the board above the enclosure bottom, especially effective when using two sided boards. This circuit board bracket has a standard E1 (IEC 297-3, DIN 41494) Eurocard screw mounting distance of 89 mm (3.5") accepting M2,5 to M4 screws. The bracket can also be used for nonstandard boards by separating the ends of the bracket (a) from the connector bridge (b). If the bracket is not needed, the adapter parts for each individual mounting pod size can be used only for raising the board above the enclosure body level.

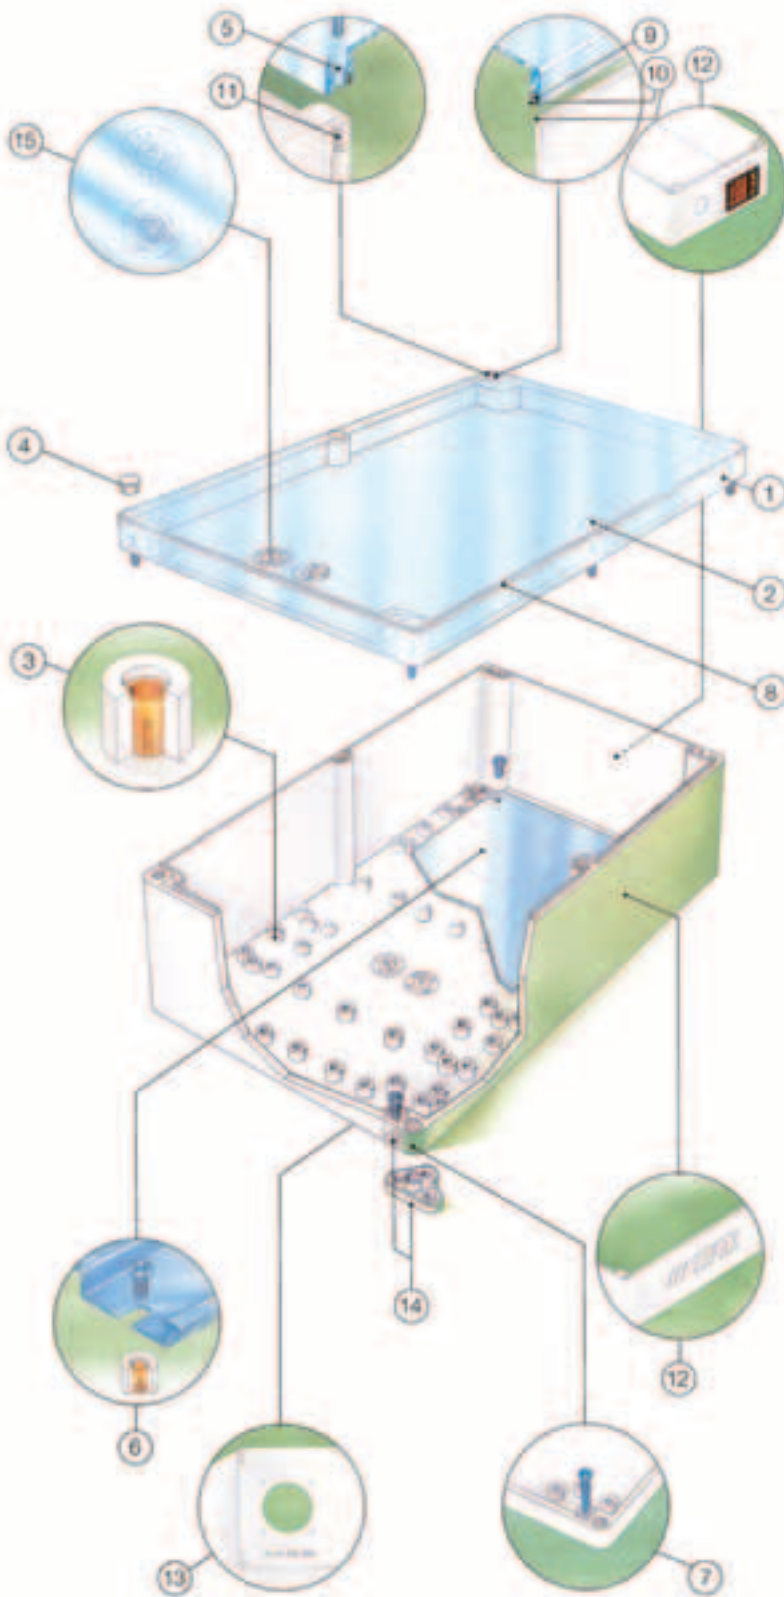


CIRCUIT BOARD BRACKET

ORDER SYMBOL	Standard Mounting Distance	Remarks
MB 28086	89 mm	Adapter for EURONORD, PICCOLO, MINI. Direct mount to EK, SOLID, EKI.

FIBOX EURONORD II

POLYCARBONATE AND ABS ENCLOSURES



1. Enclosure covers are moulded with state of the art technology. Depending upon size, covers are injection moulded from the edge or the inside surface. The outer surface is free of "gate marks" creating a smooth area for labels, decals or screen printing.
2. Cover screws are designed for automatic assembly using normal tools or PosiDrive Phillips screwdrivers. Slightly ferrite, F1 stainless screws work with magnetised drivers. Screws fully tighten in 4 revolutions.
3. Fibox Euronorm II enclosures feature more mounting points than the competitors' products. F1 style screws are provided for mounting inner panels and Din rails. Enclosures feature low height mounting pods, thus maximising internal usable depth. Brass M3 inserts are also available.
4. Decorative cover plugs create a smooth finished appearance.
5. Cover screws are held captive, but are still removable.
6. Assorted mounting plates and Din rails are available.
7. Enclosures can be wall mounted through the base holes. This reduces both mounting area and possible vandalism. Mounting holes are outside the gasket area maintaining water tight protection.
8. The Euronorm II features a slightly bevelled edge design creating a modern look.
9. Robotically applied, foamed in place PUR gaskets are moulded into the unique designed gasket groove. The tight adhesion and low compression set of PUR gasket material ensures protection ratings of NEMA 4 and IP 66/67.
10. An extension strip structure reinforces the inner gasket groove edge, protecting against side impact.
11. Special injection moulded plastic threads allow the cover screws to fasten quickly, while preventing sticking and corrosion.
12. The enclosure sides have space for mounting switches, sensors, or cable glands. Smooth sides allow decals or screen printing of logos. Fibox can customise enclosures with cut-outs, drilled or machined holes, and knock-out openings to the customers specifications.
13. Customisation of the back and sides of the enclosure can be supplied by Fibox.
14. Optional wall mounting brackets (feet) allow 4 external mounting points for hanging the enclosure, even when the cover is in place.
15. Fibox is an ISO 9001 manufacturer. Each enclosure part (cover and base) bears a code number, indication of manufacturing date and type of plastic, i.e. PC, ABS, etc. These indications are moulded into the part for quality control purposes and for compliance with European recycling regulations.

TECHNICAL INFORMATION FOR EURONORD PC AND ABS

PROPERTY	POLYCARBONATE (PC)	ABS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/IP67	IP66/67	USA Enclosures for Electrical Equipment PC: UL Type 1, 4, 4X, 12 and 13 (UL 50/508) ABS: NEMA 1, 4, 4X, 12 and 13
Impact Resistance (EN 50102)	IK 08/IK 07	IK 07	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	40°...120°C	-40°...80°C	Europe Enclosures for Switch Gear and Control Gear Assemblies EN 50298:1998
Temperature Range Fahrenheit (short term)	40°...250°F	-40°...175°F	
Temperature Range Celsius (continuous)	-40°...80°C	-40°...60°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (continuous)	-40°...175°F	-40°...140°F	
Electrical Insulation	Totally insulated 	Totally insulated 	Australia Enclosures for switch gear and control gear AS 3132-1991
Light Grey Parts Colour	RAL 7035	RAL 7035	
Transparent Clear PC Cover	Industry Grey	Industry Grey	
Cover Screws	Clear Transparent	Clear Transparent	
Gasket	Stainless steel	Stainless steel	
Gasket	PUR	PUR	
Enclosure Flammability Rating	UL94-5V	UL94HB	UL 746 C 5 in. vertical flame test
Glow Wire Test	960°C	650°C	IEC 695-2-1, Self-extinguishing
Non-toxicity	Halogen Free	Halogen Free	
UV resistance	UL 508		
	720 hours in "Weatherometer"		
Chemical Resistance *	Good	Good	







Data subject to change without notice. * Consult separate raw material data for more detailed information

ACCESSORIES FOR EURONORD PC AND ABS

Product	Order symbol	Size mm	
Mounting plate 	TM 0505 TM 0507 TM 0808 TM 0812 TM 0816 TM 1212 TM 1216 TM 1220 TM 1520 TM 1625 TM 2330	26 x 48 26 x 57 56 x 71 71 x 94 71 x 134 96 x 111 111 x 134 111 x 174 141 x 174 151 x 214 221 x 274	
Mounting rail DIN 15 	TRM 0507 TRM 0808 TRM 0812 TRM 0816 TRM 1212	15 x 48 15 x 68 15 x 106 15 x 146 15 x 110	
Mounting rail DIN 35 	TRH 1212 TRH 1216 TRH 1220 TRH 1520 TRH 24 TRH 2330	35 x 110 35 x 146 35 x 186 35 x 170 35 x 226 35 x 285	
Plastic hinges (2 pcs) 	TH A		
Wall fastening lug set 	TF 28037		
Inspection windows 	L02 L04 L06 L08 L10	60 x 77 96 x 77 130 x 77 162 x 77 199 x 77	





Product	Order symbol	Size mm	
Brass insert M3 for PC, PCT and ABS enclosures, set of 4 pcs 	MRS 28084 set	M3	
Mounting screw 	MR 28036EU	4.5 x 8.0	
Sealing pin 	SB 28088		
Decoration plug for PC, PCT and ABS enclosures 	MB 28018		
Water plug 	MB 12189		
Cover screw 	MR 28005EU		
Mounting screw 	MR 28036EU		
Cover screw set, incl. 2 x MR 28005 EU and 2 x MR 28036	MRS 38036		
Cover screw set, incl. 4 x MR 28005 EU and 4 x MR 28036	MRS 38005		

FIBOX EURONORD II

FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C			FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C		
	B x A	ORDER SYMBOL			B x A	ORDER SYMBOL	
	L x S mm				L x S mm		
AL 050503 Y x X 50 mm 45 mm 	Z / C 31.5 x 20.5 B x A - L x S 40 x 35	AL 050503		AL 082506 Y x X 252 mm 81 mm 	Z / C 56.5 x 45.5 B x A 231 x 39 L x S 238 x 52	AL 082506	
AL 060605 Y x X 60 mm 66 mm 	Z / C 46 x 35 B x A 46 L x S 46 x 36	AL 060605		AL 121208 Y x X 125 mm 124 mm 	Z / C 81 x 64 B x A 95 x 52 L x S 104,6 x 82	AL 121208	
AL 061005 Y x X 100 mm 66 mm 	Z / C 46 x 35 B x A 45 x 50 L x S 86 x 36	AL 061005		AL 122208 Y x X 222 mm 125 mm 	Z / C 81 x 64 B x A 193 x 52 L x S 202,6 x 82	AL 122208	
AL 061505 Y x X 152 mm 66 mm 	Z / C 46 x 35 B x A 100 x 46 L x S 138 x 36	AL 061505		AL 123608 Y x X 362 mm 125 mm 	Z / C 81 x 64 B x A 333 x 52 L x S 342,6 x 82	AL 123608	
AL 080806 Y x X 82 mm 77 mm 	Z / C 56.5 x 45.5 B x A 56 x 39 L x S 63 x 52	AL 080806		AL 161609 Y x X 163 mm 162 mm 	Z / C 91 x 74 B x A 130 x 76 L x S 140 x 110	AL 161609	
AL 081306 Y x X 127 mm 81 mm 	Z / C 56.5 x 45.5 B x A 50 x 62 L x S 113 x 52	AL 081306		AL 162609 Y x X 263 mm 162 mm 	Z / C 91 x 74 B x A 230 x 76 L x S 240 x 110	AL 162609	
AL 081806 Y x X 177 mm 81 mm 	Z / C 56.5 x 45.5 B x A 100 x 62 L x S 163 x 52	AL 081806		AL 163609 Y x X 360 mm 160 mm 	Z / C 90 x 72 B x A 330 x 76 L x S 340 x 110	AL 163609	

External
height **Y**External
width **X**External
depth **Z**Free internal
mounting height **C**Mounting plate
assembly **B** x **A**Wall
mounting **L** x **S**

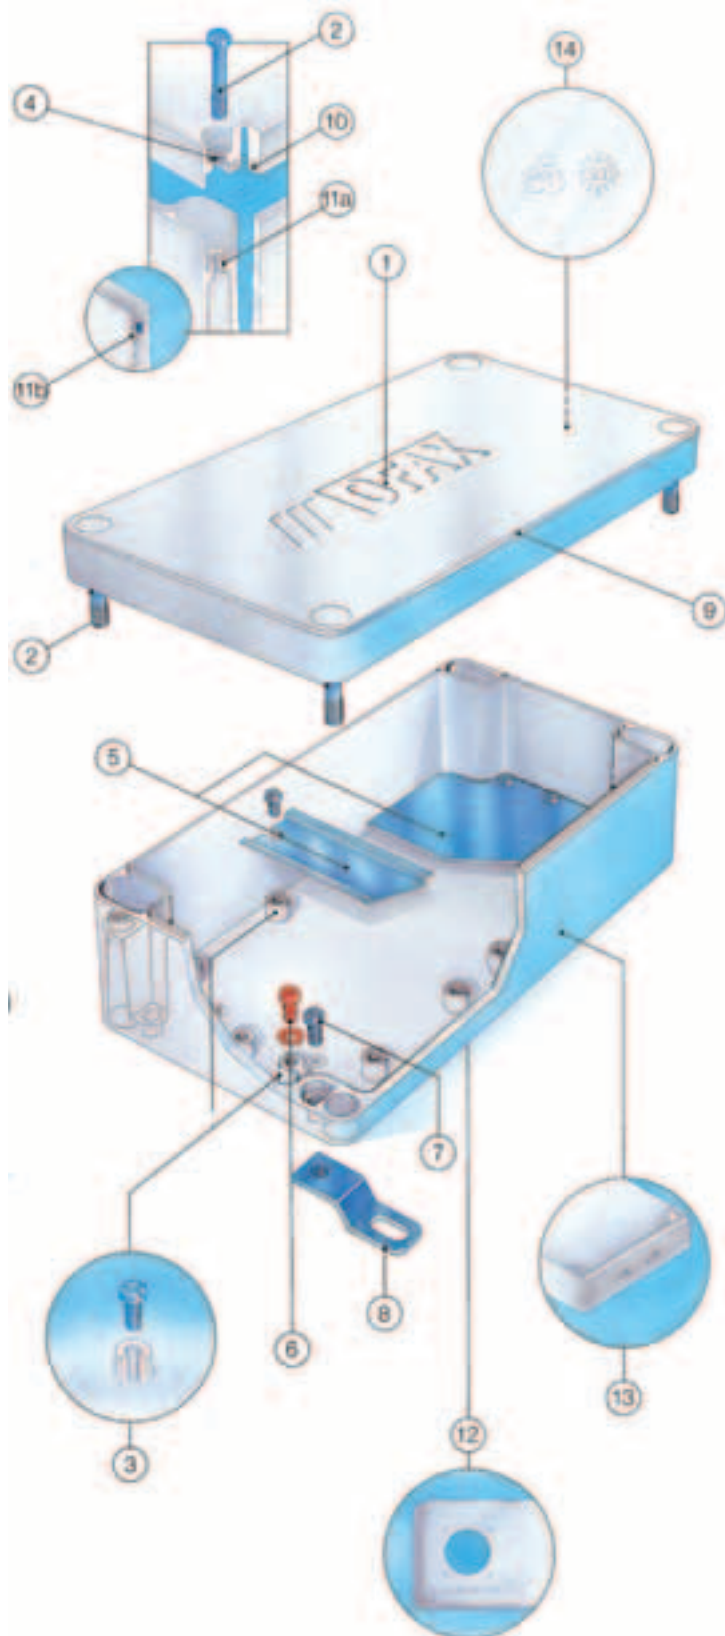
FIBOX EURONORD II

FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C	ORDER SYMBOL		FIBOX EURONORD II ALUMINIUM IP66 / IP67, IK 08	Z x C	ORDER SYMBOL	
	B x A L x S mm				B x A L x S mm		
AL 165609 Y x X 560 mm 160 mm 	Z x C 90 x 72 B x A 530 x 76 L x S 540 x 110	AL 165609		AL 236011 Y x X 600 mm 230 mm 	Z x C 110 x 90 B x A 570 x 144 L x S 580 x 180	AL 236011	
AL 232011 Y x X 230 mm 200 mm 	Z x C 110 x 93 B x A 144 x 170 L x S 180 x 180	AL 232011		AL 314011 Y x X 402 mm 310 mm 	Z x C 110 x 90 B x A 372.5 x 223.5 L x S 382.5 x 261	AL 314011	
AL 232018 Y x X 230 mm 200 mm 	Z x C 180 x 162 B x A 144 x 170 L x S 180 x 180	AL 232018		AL 314018 Y x X 402 mm 310 mm 	Z x C 180 x 162 B x A 372.5 x 223.5 L x S 382.5 x 261	AL 314018	
AL 232811 Y x X 280 mm 230 mm 	Z x C 110 x 93 B x A 250 x 144 L x S 260 x 180	AL 232811		AL 316011 Y x X 600 mm 310 mm 	Z x C 110 x 92 B x A 570 x 223.5 L x S 580 x 261	AL 316011	
AL 233311 Y x X 330 mm 230 mm 	Z x C 110 x 93 B x A 300 x 144 L x S 310 x 180	AL 233311		AL 316018 Y x X 600 mm 310 mm 	Z x C 180 x 162 B x A 570 x 223.5 L x S 580 x 261	AL 316018	
AL 233318 Y x X 330 mm 230 mm 	Z x C 180 x 162 B x A 300 x 144 L x S 310 x 180	AL 233318					
AL 234011 Y x X 401 mm 230 mm 	Z x C 110 x 92 B x A 373 x 144 L x S 381 x 180	AL 234011					

External
height **Y**External
width **X**External
depth **Z**Free internal
mounting height **C**Mounting plate
assembly **B** x **A**Wall
mounting **L** x **S**

FIBOX EURONORD II

ALUMINIUM ENCLOSURES








1. Enclosure covers can be custom designed. Modifications include holes, cutouts, flanges, and frames. Even external changes such as cooling ribs (heat sinks) are possible. OEMs receive the enclosure ready for assembly.
2. Cover screws are designed for automatic assembly using normal tools or PosiDrive Phillips screwdrivers. Slightly ferrite, FI stainless screws work with magnetised drivers.
3. This enclosure has more internal mounting points than other enclosures on the market. There are threaded M4 or M6 mounting pods at both interior ends of the bases. Along the interior sides, the enclosure bases have rows of pods ready for M3 Taptite (smaller enclosures) and M5 Taptite (larger enclosures). Alternatively, pods can be machined for M4 or M5 mounting screws. Helicoil inserts are available in English thread sizes.

The large number of mounting pods, especially in the bigger enclosures, creates many alternatives for mounting components. Various sized mounting plates are easily installed. DIN rails can be mounted either vertically or horizontally permitting high density terminal block installation.

Usable internal depth is maximised as Euronorm II has the lowest height mounting pods on the market.

4. A special retainer keeps cover screws captive. No more lost hardware.
5. A variety of mounting plate sizes are available, plus TS35 and TS15 DIN rail cut to size.
6. Proper electrical earthing is ensured with copper plated screws and paint free grounding pods.
7. The enclosures can be mounted through the base. The mounting holes are outside the gasket area; maintaining the water tight seal. Oval shaped mounting holes accommodate mounting centre variations.
8. Optional stainless steel wall mounting plates permit mounting without opening the enclosure.
9. The Euronorm II features a slightly bevelled edge design creating a modern look.
10. Robotically applied, foamed in place PUR gaskets are into the unique designed gasket groove. The tight adhesion and low compression set of PUR gasket material insures protection ratings of NEMA 4 and IP 66/67.
11. Enclosure bases are tapped to receive cover screws, either M4 or M6, depending upon enclosure size. Optional special thread types are available, as are Helicoil special steel thread inserts which prevent cover screws from corroding even in saltwater environments.
12. Customisation of the back and sides of the enclosure can be supplied by Fibox.
13. Larger enclosures have lots of space for mounting instruments, switches, sensors, indicators and connectors. Smooth sides permit easy machining and allow decal and screen printing. Fibox can customise the enclosure with openings, cut-outs, holes and tapped holes. Changes can add unique options, for example, conduit hub openings or cooling fins.
14. Manufactured using unique techniques. These enclosures have straight sides (no draft angle) which means conduit and cable fitting are at right angles, insuring stress free connections. Further, straight sides mean that enclosures can be securely "ganged" together without gaps.

FIBOX EURONORD II

FIBOX EURONORD II POLYESTER (GRP) IP65, IK 08	Z x C	ORDER SYMBOL		FIBOX EURONORD II POLYESTER (GRP) IP65, IK 08	Z x C	ORDER SYMBOL	
	B x A L x S mm				B x A L x S mm		
P 080806 Y x X 80 mm 75 mm 	Z x C 55 x 47 B 59 L x S 68 x 45	P 080806		P 162609 Y x X 260 mm 160 mm 	Z x C 92 x 75 B x A 233 x 76 L x S 240 x 110	P 162609	
P 081106 Y x X 110 mm 75 mm 	Z x C 55 x 47 B 89 L x S 98 x 45	P 081106		P 163609 Y x X 360 mm 160 mm 	Z x C 91 x 74.5 B x A 333 x 76 L x S 340 x 110	P 163609	
P 081606 Y x X 160 mm 75 mm 	Z x C 55 x 47 B 139 L x S 148 x 45	P 081606		P 252612 Y x X 257 mm 251 mm 	Z x C 121 x 105 B x A 227.5 x 100 L x S 236 x 200.5	P 252612	
P 081906 Y x X 190 mm 75 mm 	Z x C 55 x 47 B 169 L x S 178 x 45	P 081906		P 254012 Y x X 400 mm 250 mm 	Z x C 120 x 104.5 B x A 372.5 x 100 L x S 381.5 x 201	P 254012	
P 121209 Y x X 122 mm 120 mm 	Z x C 90 x 75 B x A 95 x 52 L x S 106 x 82	P 121209		P 404012 Y x X 405 mm 400 mm 	Z x C 120 x 105 B x A 373.5 x 250.5 L x S 381.5 x 356	P 404012	
P 122209 Y x X 220 mm 120 mm 	Z x C 90 x 75 B x A 193 x 52 L x S 204 x 82	P 122209					
P 161609 Y x X 160 mm 160 mm 	Z x C 91 x 75 B x A 132 x 76 L x S 140 x 110	P 161609					

External
height **Y**External
width **X**External
depth **Z**Free internal
mounting height **C**Mounting plate
assembly **B** x **A**Wall
mounting **L** x **S**

FIBOX EURONORD II

TECHNICAL INFORMATION FOR EURONORD ALUMINIUM- AND POLYESTER ENCLOSURES

PROPERTY	AlSi Cast ALUMINIUM	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP66/67	USA Enclosures for Electrical Equipment UL Type 1, 4, 4X, 6, 12 and 13 (50/508)
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-50°...140°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (short term)	-60°...285°F	
Temperature Range Celsius (continuous)	-50°...80°C	
Temperature Range Fahrenheit (continuous)	-60°...175°F	
Polyester Powder Paint Colour	RAL 7001	
Cover Screws	Stainless Steel	
Gasket	PUR/Neoprene	
Chemical Resistance *	Good	

PROPERTY	FIBERGLASS	CONFORMITY TO STANDARDS (UL, CSA, CE, Lloyds, BV, FI)
Ingress Protection (EN 60529)	IP65	USA Enclosures for Electrical Equipment NEMA 1, 4, 4X, 6, 12 and 13
Impact Resistance (EN 50102)	IK 08	Canada Industrial Control Equipment Enclosures for Electrical Equipment/ULc
Temperature Range Celsius (short term)	-50°...120°C	Europe Safety of Information Technology Equipment EN 60950
Temperature Range Fahrenheit (short term)	-60°...250°F	
Temperature Range Celsius (continuous)	-40°...80°C	Australia Enclosures for switch gear and control gear AS 3132-1991
Temperature Range Fahrenheit (continuous)	-40°...175°F	
Electrical Insulation	Totally insulated 	UL 746 C 5 in. vertical flame test IEC 695-2-1, Self-extinguishing
Colour	RAL 7001, grey	
Enclosure Flammability Rating	UL94-5V	
Glow Wire test	960°C	
Cover Screws	Stainless Steel	
Gasket	EPDM	
Chemical Resistance *	Good	


Data subject to change without notice. *Consult separate raw material data for more detailed information

ACCESSORIES FOR EURONORD ALUMINIUM ENCLOSURES

Product	Order symbol	Size mm	
Mounting plate 	AM 0808 AM 0813 AM 0818 AM 0825 AM 1212 AM 1222 AM 1236 AM 1616 AM 1626 AM 1636 AM 1656 AM 2320 AM 2328 AM 2333 AM 2340 AM 2360 AM 3140 AM 3160	69 x 64 69 x 114 69 x 164 69 x 240 107 x 110 107 x 207 107 x 347 146 x 146 146 x 244 146 x 346 146 x 545 215 x 184 215 x 264 215 x 315 215 x 385 215 x 586 294 x 387 293 x 585	
Mounting rail DIN 15 	ARM 0610 ARM 0615 ARM 0808 ARM 0813 ARM 0818 ARM 0825	15 x 88 15 x 140 15 x 65 15 x 115 15 x 165 15 x 240	
Mounting rail DIN 35 	ARH 12 ARH 22 ARH 36 ARH 16 ARH 26 ARH 1636 ARH 1656 ARH 2320 ARH 2328 ARH 2333 ARH 40 ARH 60	35 x 105 35 x 203 35 x 343 35 x 140 35 x 240 35 x 340 35 x 540 35 x 180 35 x 260 35 x 310 35 x 383 35 x 580	
Earth screw	MR 28550M	M4 x 6	
Earth screw	MR 28546CU	M4 x 6	
Mounting screw	MR 28548ZN	M4 x 6	
Screw set	MRS 38546		
Ground screw	MR 28547CU	M6 x 8	

Product	Order symbol	Size mm	
Mounting screw	MR 28549ZN		
Screw set	MRS 38547		
Cover screw	MR 10425	M4 x 20	
Cover screw	MR 10635	M6 x 30	
Mounting foot kit	MRS 28540 MRS 28541	11 x 42 15 x 50	
Mounting screw  M3 or M5 	MR 28550 MR 28546CU MR 28548ZN MRS 38546 MR 28547CU MR 28549ZN MRS 38547 MR 75003 MR 75005 MRHC 406 MRHC 609	M4 x 6 M4 x 6 M6 x 8 M6 x 8 M3 M5 M4 M6	
Cover screw	MRS 28544A4 MRS 28545WH	M6 x 30 M6 x 30	

ACCESSORIES FOR EURONORD POLYESTER

Product	Order symbol	Size mm	
Mounting plate 	PM 0808 PM 0811 PM 0816 PM 0819 PM 1616 PM 1626 PM 2526 PM 2540 PM 4040	64 x 69 64 x 99 64 x 149 64 x 179 146 x 146 146 x 244 231 x 240 231 x 383 390 x 385	
Mounting rail DIN 15	PRM 0811 PRM 0816 PRM 0819	15 x 99 15 x 149 15 x 179	
Mounting rail DIN 35	PRH 2526	35 x 238	
Hinge kit 1 pair includes screws	AH A/B PH A		
Mounting lug kit	MRS 28540 MRS 28541	11x42 15x50	