
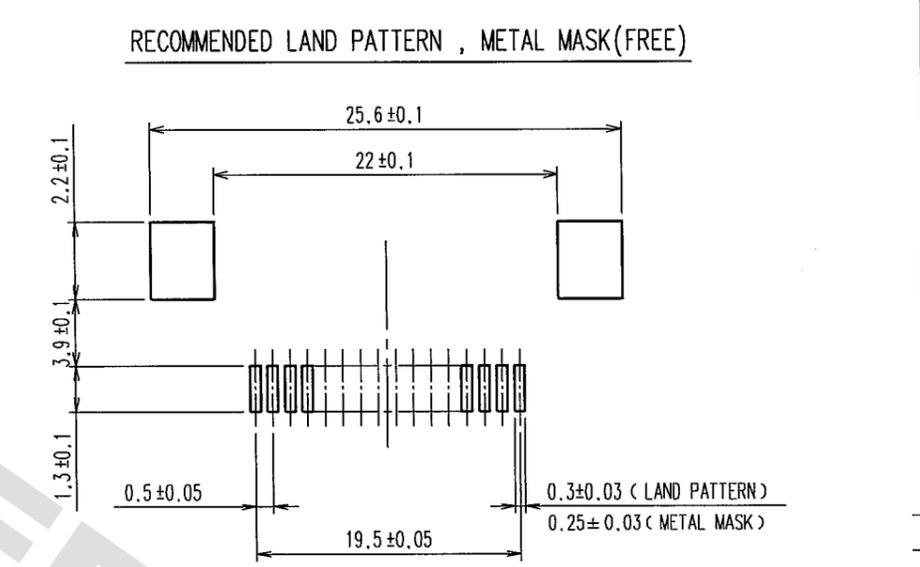
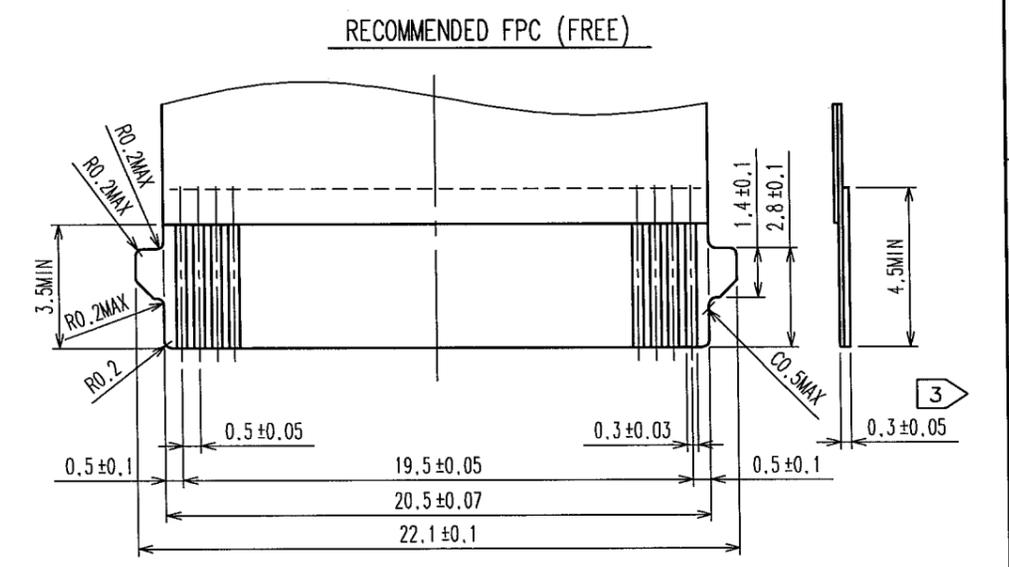
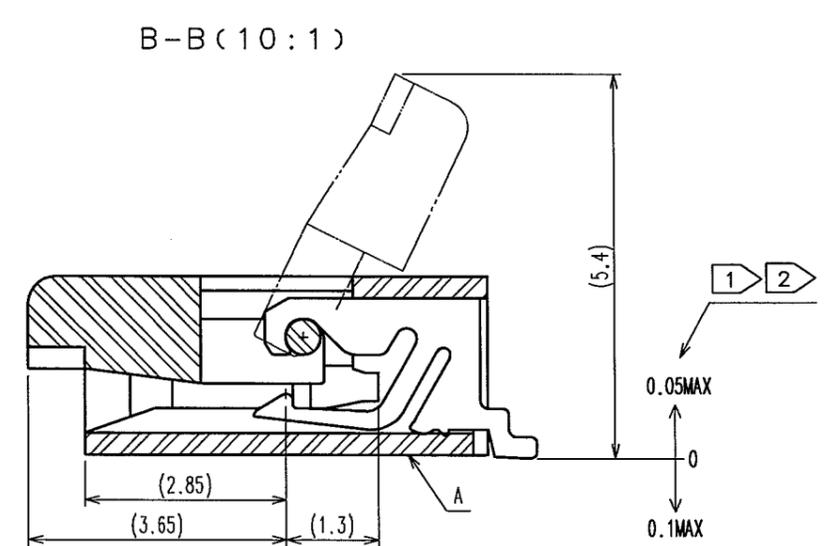
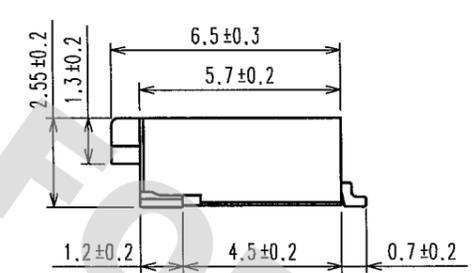
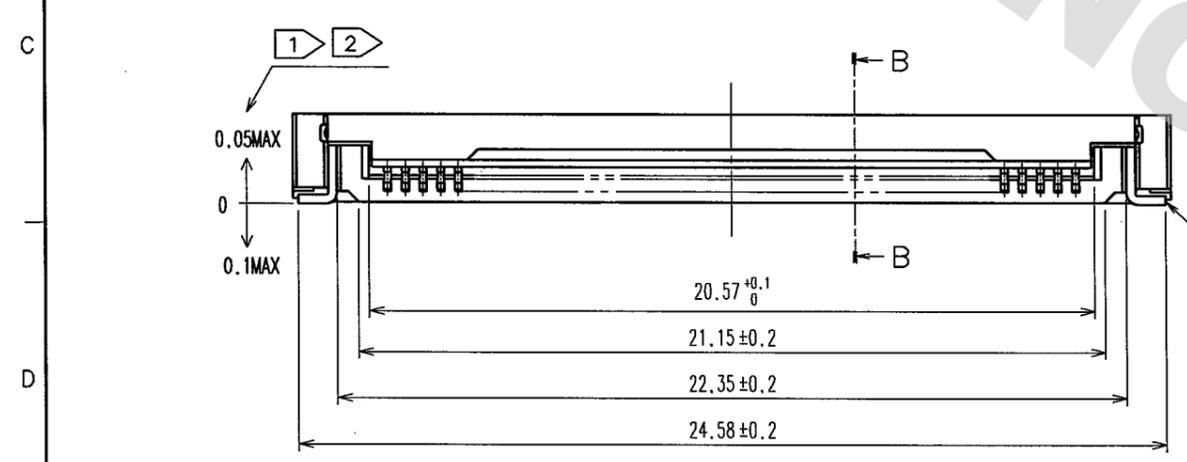


DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
NC

5			6			7			8		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		

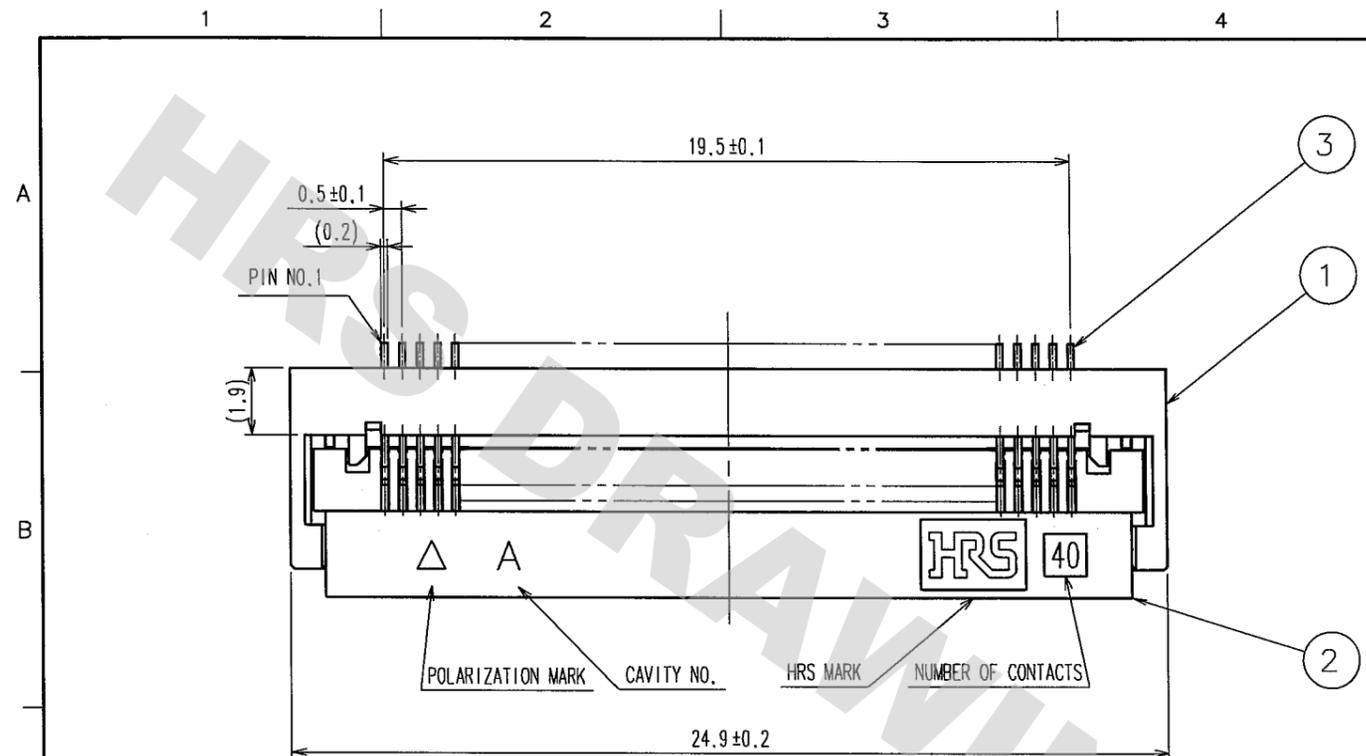

RECOMMENDED METAL MASK THICKNESS: $t = 0.15$

- NOTE
- 1 REFERENCE IS A.
 - 2 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 3 THICKNESS OF SUPPORTING TAPE SHALL BE 0.188(7.5mil) MIN.

2	LCP	(BLACK)	UL94V-0	4	BRASS	TIN PLATING 1μm MIN. OVER NICKEL 1μm MIN.
1	LCP	(GRAY)	UL94V-0	3	PHOSPHOR BRONZE	GOLD PLATING FLASH OVER NICKEL 1μm MIN.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD) CL?	DRAWN D.YAMADA 04.07.22		DESIGNED H.TSUKUMO 04.07.22	CHECKED <i>R. Takayama</i> 04.07.22	APPROVED <i>R. Takayama</i> 04.07.22	RELEASED
DRAWING NO. EDC3-154185-01			PART NO. FH28-40S-0.5SH(05)			
SCALE 5 : 1			CODE NO. CL586-1803-8-05			
UNITS mm			HRS HIROSE ELECTRIC CO., LTD			


1/2 (FH)

DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012



5		6			7			8		
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	

A
B
C
D
E
F

A
B
C
D
E
F

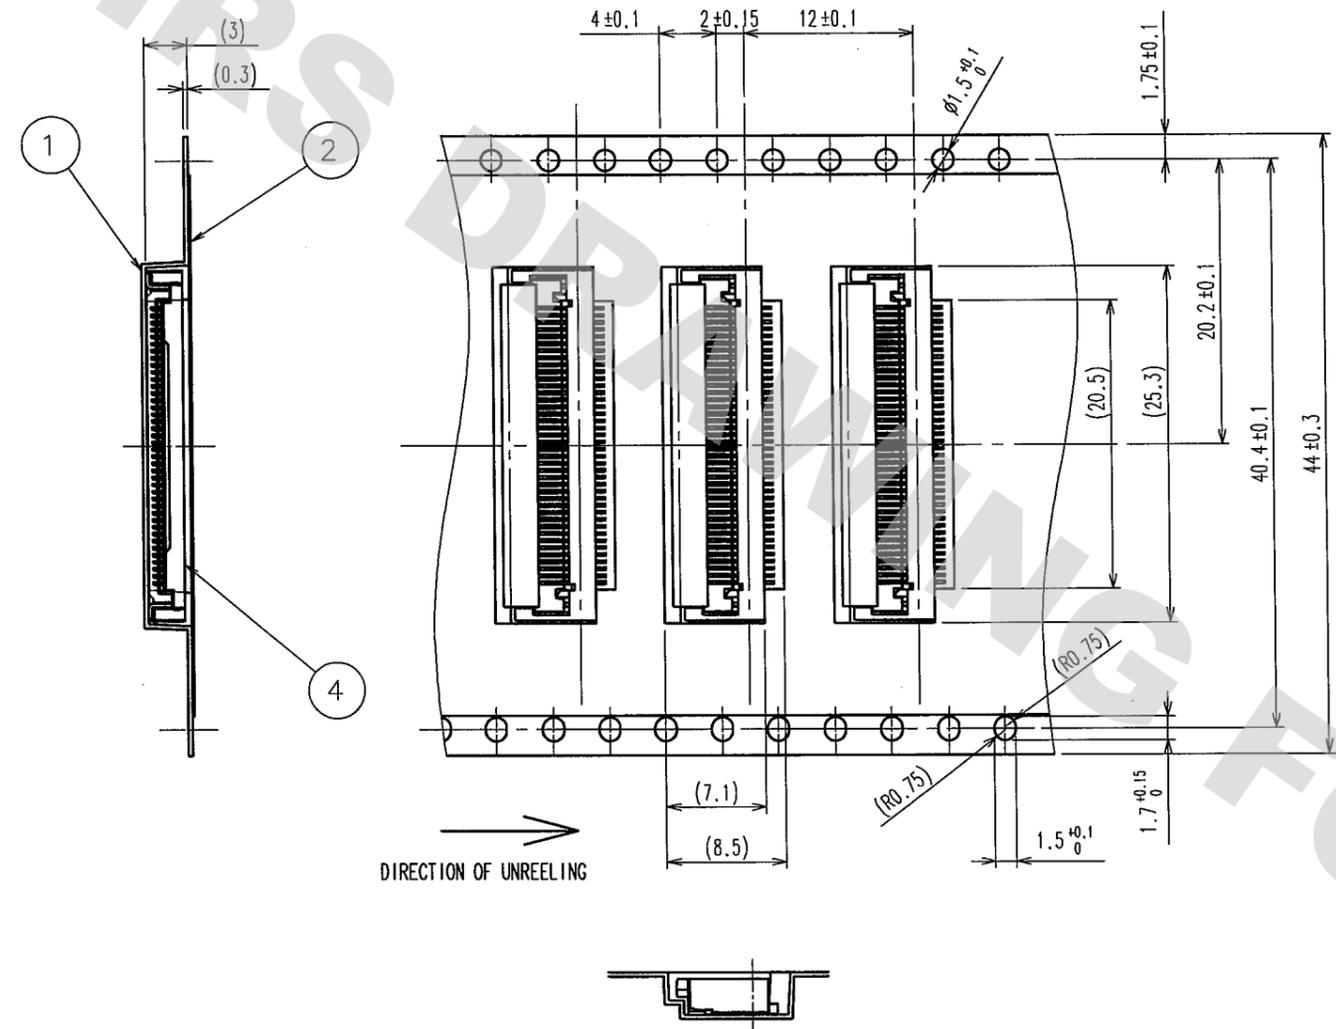

REEL DIMENSION (FREE)

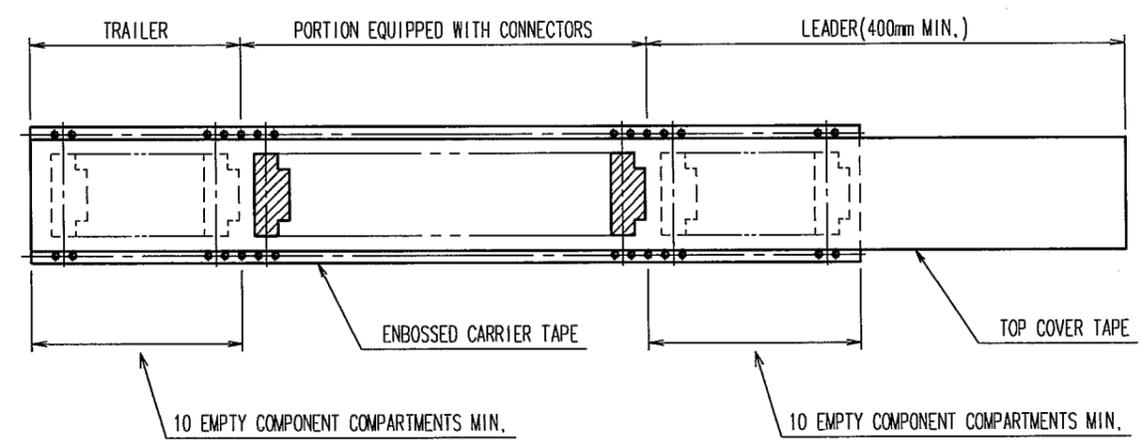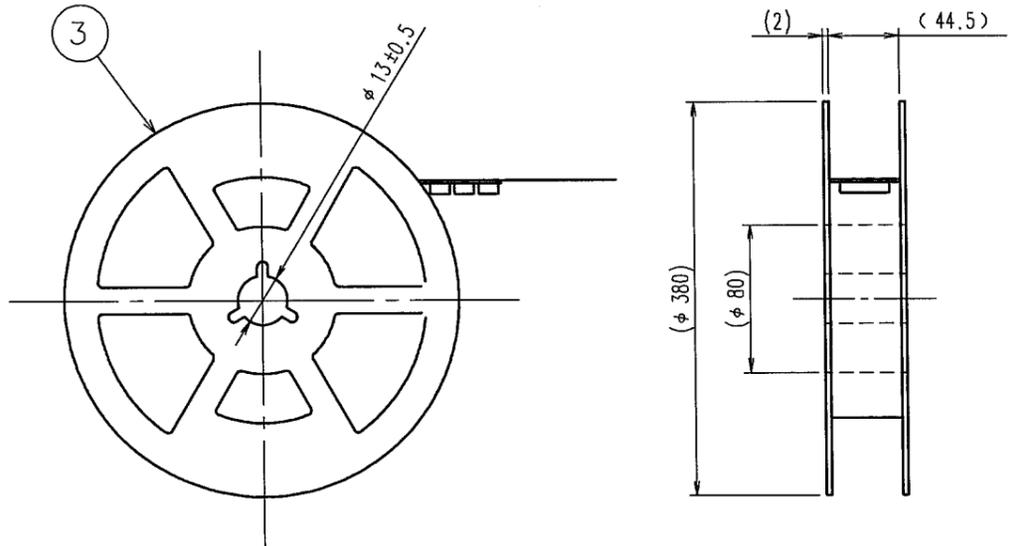

- NOTE 1 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 2 PER REEL : 2000 CONNECTORS.
 3 REFER TO JIS C 0806 (PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING).

2	POLYESTER		4	(CONNECTOR)	
1	POLYSTYRENE		3	POLYSTYRENE	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL?		DRAWN D.YAMADA	DESIGNED H.TSUKUMO	CHECKED <i>S. Hatomaki</i>	APPROVED <i>R. Takayasu</i>
DRAWING FOR PACKING			04.07.22	04.07.22	04.07.22
DRAWING NO. EDC3-154185-01		PART NO. FH28-40S-0.5SH(05)		CODE NO. CL586-1803-8-05	
SCALE 2 : 1		HRS HIROSE ELECTRIC CO., LTD		2	

TO
NC

