



DIMENSIONS

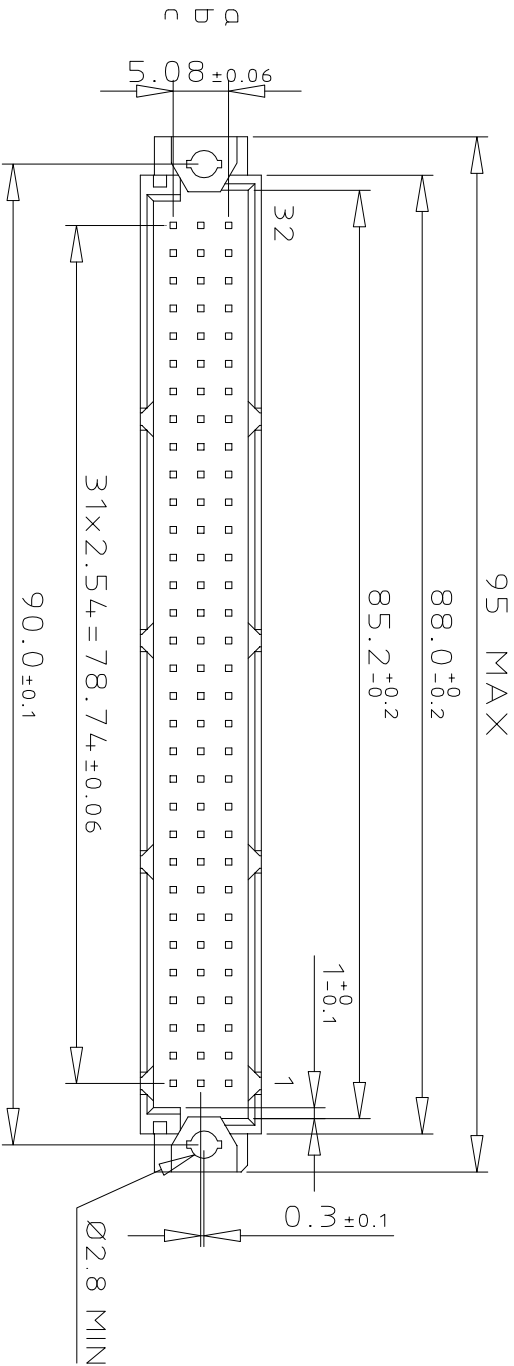


TERMINATION

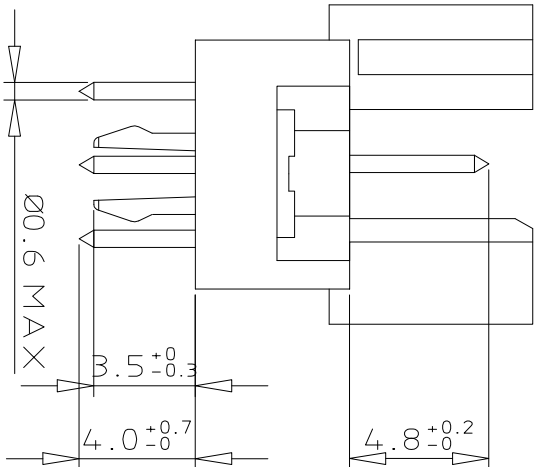


ORDERING INFORMATION

SERIES	8609	3	96	7	8	14	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
Row a b c										
Row a - c										
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										
TERMINATION										
STRAIGHT SPILL										
OPTIONS										
NO. OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
254 mm										
LEAD FREE VERSION										

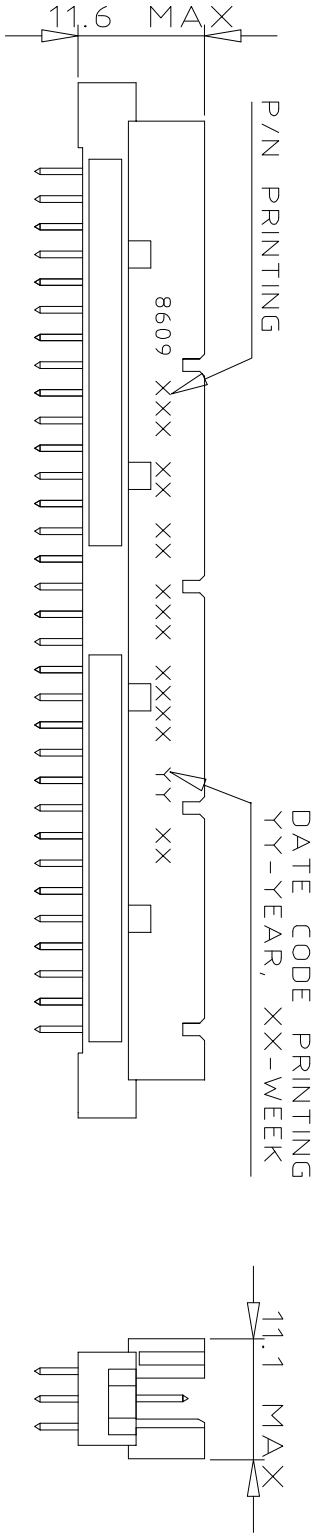


PCB LAYOUT

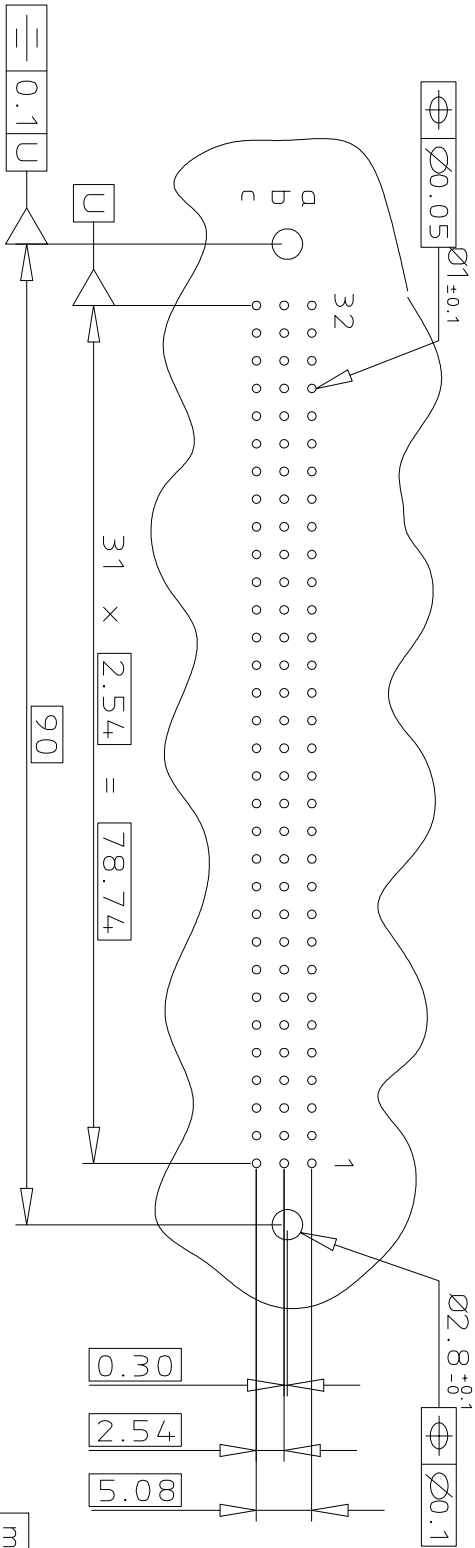

Copyright FCI



GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302		tolerance ISO 406 ISO 1101		projection 		product family 8609					
ltr		ecn no		dr		date		tolerances unless otherwise specified		title		DIN REVERSE HEADER DIN 41612 STYLE R			
A		104-0063		MINI		2004-09-17		angles		linear					
B		105-0089		MINI		2005-05-19		0.XX		±0.1					
C		105-0174		MINI		2005-09-27		0°±2°		0.XXX ±0.1					
D		106-0061		MINI		2006-05-31		dr		MINI K V					
E		108-0142		KR		2008-10-17		engr		RAKHEE G		2004-09-17			
F		108-0146		KR		2008-10-21		chr		KESAVAN R		2008-10-21			
								qpdp		KESAVAN R		2008-10-21			
sheet index		revision		sheet		F		1		FCI		dwg no			
												sheet 1 of 1			
												size			
												A3			
												type			
												Product Customer Drawing			



dwg no	sheet 1 of 1	size
C-8609-2004	A3	
type	Product	Customer Drawing