

### RoHS **213 Series, 5 x 20 mm, Time-Lag (Slo-Blo®) Fuse**



#### Agency Approvals

| Agency                                                                              | Agency File Number                                                                              | Ampere Range     |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|------------------|
|    | Cartridge Certificates:<br>NBK120802-E10480 A&C<br>Leaded Certificates:<br>NBK120802-E10480 B&D | 1A – 5A<br>6.3A  |
|    | Certificates:<br>2003010207045592                                                               | 200mA – 6.3A     |
|    | Recognised File:<br>E10480<br>Guide:<br>JDYX2                                                   | 200mA – 6.3A     |
|  | File:<br>029862<br>Acc. Class:<br>LR1422-30                                                     |                  |
|  | License:<br>KM41462                                                                             |                  |
|  | File:<br>915515,811747                                                                          |                  |
|  | License:<br>40015638                                                                            | 200mA – 4A, 6.3A |
|  |                                                                                                 | 200mA – 6.3A     |

#### Description

5x20mm time-Lag surge withstand glass body cartridge fuse designed to IEC specification.

#### Features

- Designed to International (IEC) Standards for use globally
- Available in cartridge and axial lead form
- Meets the IEC 60127-2, Sheet 3 specification for time-Lag fuses
- RoHS compliant and lead-free.

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.


#### Electrical Characteristic for Series

| % of Ampere Rating | Ampere Rating | Opening Time                   |
|--------------------|---------------|--------------------------------|
| 150%               | All Ratings   | 60 minutes, Minimum            |
| 210%               |               | 2 minutes, Maximum             |
| 275%               |               | 0.6 sec., Min.; 10 sec. Max.   |
| 400%               |               | .15 sec., Min.; 3 sec. Max.    |
| 1000%              |               | 0.02 sec., Min.; 0.3 sec. Max. |


#### Electrical Characteristic Specifications by Item

| Amp Code | Ampere Rating | Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Nominal Voltage Drop (mV) | Nominal Power Dissipation (W) | Agency Approvals                                                                      |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |                                                                                       |
|----------|---------------|--------------------|---------------------|--------------------------------|-------------------------------------------------------|---------------------------|-------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|          |               |                    |                     |                                |                                                       |                           |                               |  |  |  |  |  |  |  |  |
| .200     | 0.2           | 250                | 35A@250Vac          | 1.6000                         | 0.22500                                               | 1500                      | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .250     | 0.25          | 250                |                     | 1.0495                         | 0.55500                                               | 1300                      | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .315     | 0.315         | 250                |                     | 0.8475                         | 1.14000                                               | 1100                      | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .400     | 0.4           | 250                |                     | 0.5350                         | 1.36000                                               | 1000                      | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .500     | 0.5           | 250                |                     | 0.3700                         | 2.90500                                               | 900                       | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .630     | 0.63          | 250                |                     | 0.2750                         | 4.80000                                               | 300                       | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| .800     | 0.8           | 250                |                     | 0.1635                         | 9.42000                                               | 250                       | 1.6                           | x                                                                                     |                                                                                       | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 001.     | 1             | 250                |                     | 0.1165                         | 19.20000                                              | 150                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 1.25     | 1.25          | 250                |                     | 0.0817                         | 27.15000                                              | 150                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 01.6     | 1.6           | 250                |                     | 0.0551                         | 44.20000                                              | 150                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 002.     | 2             | 250                |                     | 0.0452                         | 92.70500                                              | 150                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 02.5     | 2.5           | 250                |                     | 0.0305                         | 138.00000                                             | 120                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 3.15     | 3.15          | 250                |                     | 0.0231                         | 202.00000                                             | 100                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 004.     | 4             | 250                | 40A@250Vac          | 0.0170                         | 226.50500                                             | 100                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 005.     | 5             | 250                | 50A@250Vac          | 0.0116                         | 314.00000                                             | 100                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |
| 06.3     | 6.3           | 250                | 63A@250Vac          | 0.0095                         | 600.00000                                             | 100                       | 1.6                           | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     | x                                                                                     |


Temperature Derating Curve

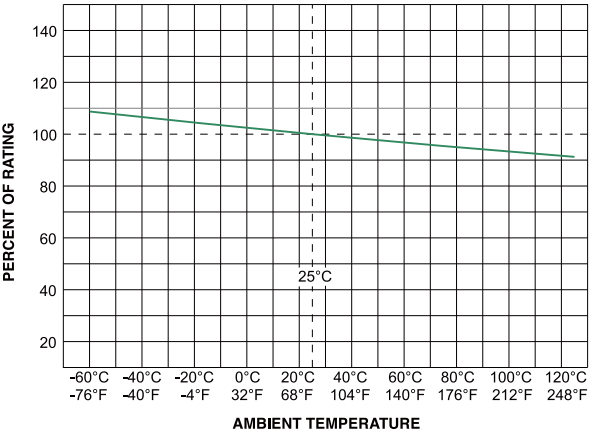

Average Time Current Curves

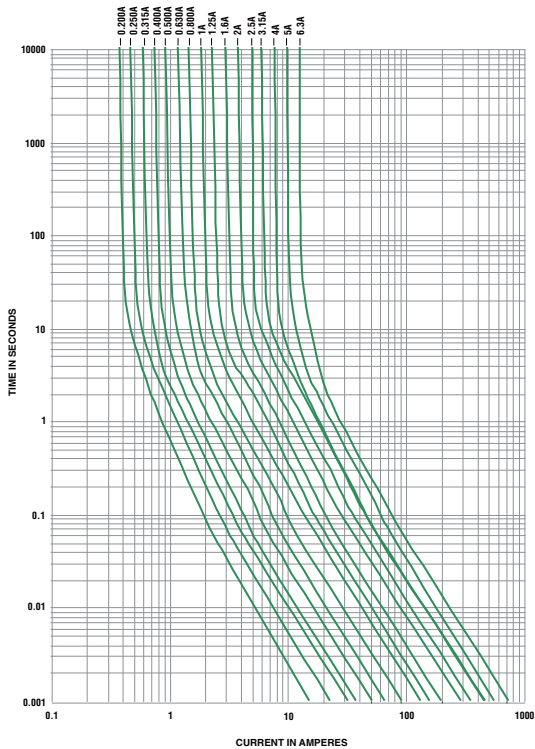

Soldering Parameters - Wave Soldering

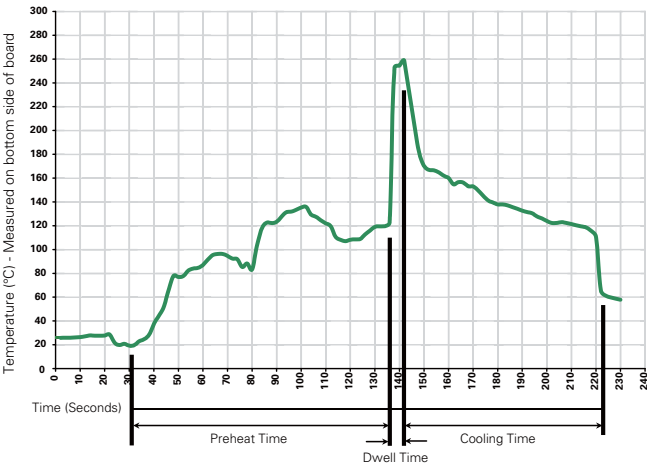

Recommended Process Parameters:

| Wave Parameter                                              | Lead-Free Recommendation          |
|-------------------------------------------------------------|-----------------------------------|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:                                        | 100° C                            |
| Temperature Maximum:                                        | 150° C                            |
| Preheat Time:                                               | 60-180 seconds                    |
| <b>Solder Pot Temperature:</b>                              | 260° C Maximum                    |
| <b>Solder Dwell Time:</b>                                   | 2-5 seconds                       |

Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350° C +/- 5°C  
Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**


### Product Characteristics

|                          |                                                                                 |
|--------------------------|---------------------------------------------------------------------------------|
| <b>Material</b>          | Body: Glass<br>Cap: Nickel-plated brass<br>Leads: Tin-plated Copper             |
| <b>Terminal Strength</b> | MIL-STD-202G, Method 211A, Test Condition A                                     |
| <b>Solderability</b>     | Reference IEC 60127, Second Edition 2003-01, Annex A                            |
| <b>Product Marking</b>   | Cap1: Brand logo, current and voltage<br><br>Cap2: Agency approval marks Series |
| <b>Packaging</b>         | Available in Bulk (M=1000 pcs/pkg) or on Tape/Reel (MRET1=1000 pcs/reel)        |


|                              |                                                                                                           |
|------------------------------|-----------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature</b> | -55°C to +125°C                                                                                           |
| <b>Thermal Shock</b>         | MIL-STD-202G, Method 107G, Test Condition B: (5 cycles -65°C to +125°C)                                   |
| <b>Vibration</b>             | MIL-STD-202G, Method 201A                                                                                 |
| <b>Humidity</b>              | MIL-STD-202G, Method 103B, Test Condition A. High RH (95%) and elevated temperature (40°C) for 240 hours. |
| <b>Salt Spray</b>            | MIL-STD-202G, Method 101D, Test Condition B                                                               |

### Dimensions

**0213 000P**



**0213 000 XEP**

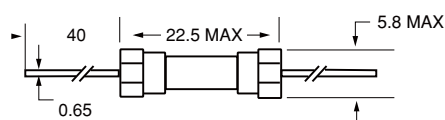

All dimensions in mm

Notes:

\* Ratings above 6.3A have 0.8 mm dia lead

### Part Numbering System

**0213 xxxx M X E P**

**Series**

**Amp Code**

Refer to Amp Code column of Electrical Characteristics Table

**Quantity Code**

M = 1000

**Packaging Code**

X = Filler

**Option Codes**

Blank : Cartridge Type Fuse

E : Axial Leaded Fuse

**Lead-free**

### Packaging

| Packaging Option  | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width     |
|-------------------|-------------------------|----------|---------------------------|------------------|
| <b>213 Series</b> |                         |          |                           |                  |
| Bulk              | N/A                     | 1000     | MX                        | N/A              |
| Bulk              | N/A                     | 1000     | MXE                       | N/A              |
| Reel and Tape     | N/A                     | 1000     | MRET1                     | T1=52mm (2.062") |
| Bulk              | N/A                     | 1000     | MXG                       | N/A              |
| Bulk              | N/A                     | 1000     | MXB                       | N/A              |
| Bulk              | N/A                     | 100      | HX                        | N/A              |

