
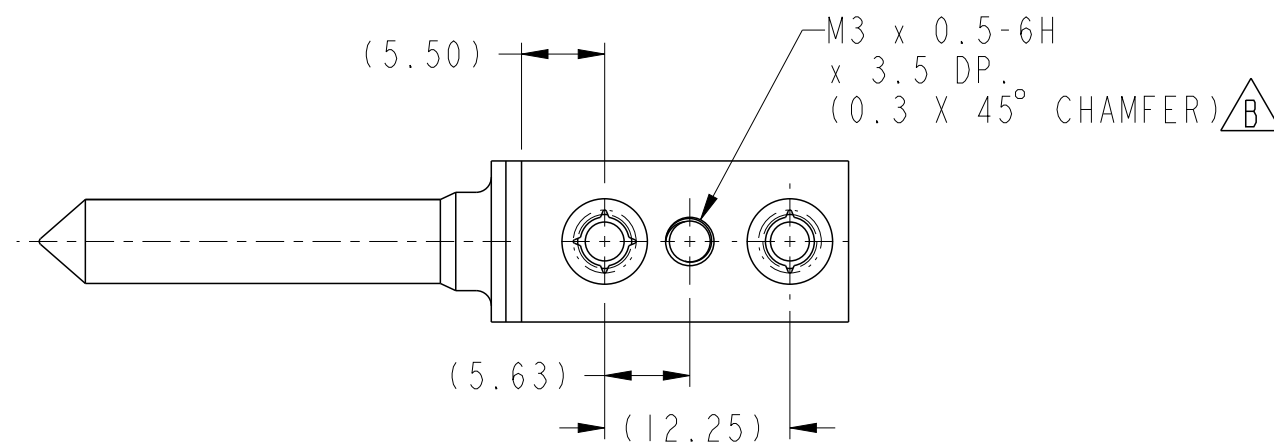
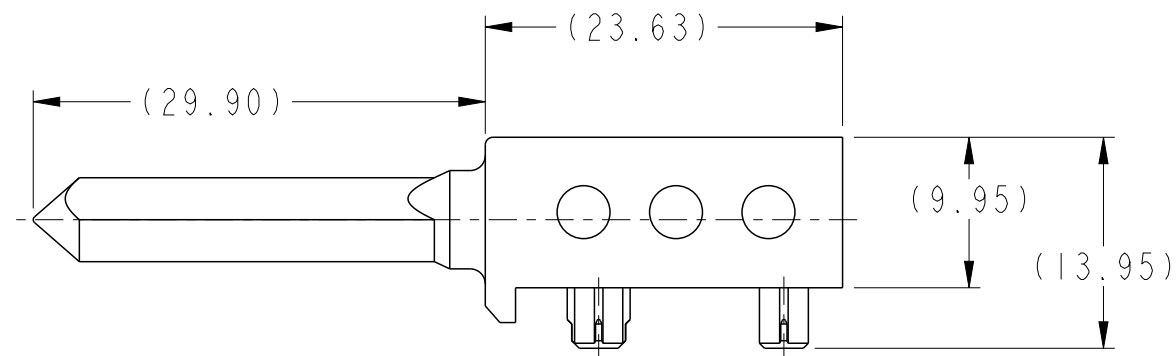


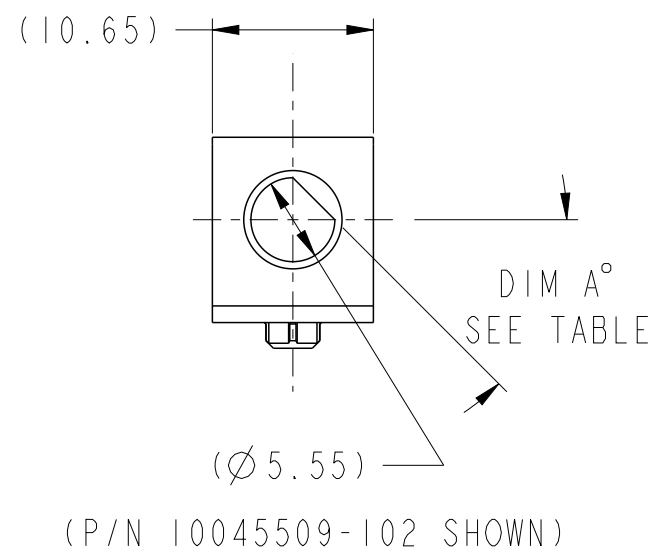

|                                 |  |  |  |         |  |               |  |            |  |                |  |                    |  |                      |  |                        |  |              |  |     |  |   |  |
|---------------------------------|--|--|--|---------|--|---------------|--|------------|--|----------------|--|--------------------|--|----------------------|--|------------------------|--|--------------|--|-----|--|---|--|
| spec ref                        |  |  |  | dr      |  | Chen-Hong Tan |  | 2006/09/09 |  | projection     |  | mm                 |  | size                 |  | A3                     |  | scale        |  | 2:1 |  |   |  |
| tolerance std                   |  |  |  | eng     |  | Yong-Keat Lim |  | 2011/10/04 |  |                |  |                    |  | ecn no               |  | ELX-S-006144-1         |  |              |  |     |  |   |  |
| ASME Y14.5                      |  |  |  | chr     |  | -             |  | -          |  |                |  |                    |  |                      |  |                        |  |              |  |     |  |   |  |
| -                               |  |  |  | appr    |  | Chen-Hong Tan |  | 2011/10/07 |  | product family |  | AirMax Accessories |  | rel level            |  | Released               |  |              |  |     |  |   |  |
| surface $3.2\sqrt{\phantom{x}}$ |  |  |  | linear  |  | 0.X           |  | ±0.3       |  |                |  | title              |  | 10.8mm R/A GUIDE PIN |  | dwg no                 |  | 10045509     |  | rev |  | B |  |
|                                 |  |  |  |         |  | 0.XX          |  | ±0.10      |  |                |  |                    |  |                      |  |                        |  |              |  |     |  |   |  |
|                                 |  |  |  |         |  | 0.XXX         |  | ±0.050     |  |                |  |                    |  |                      |  |                        |  |              |  |     |  |   |  |
| ASME Y14.5                      |  |  |  | angular |  | 0°            |  | ±2°        |  | www.fci.com    |  | cat. no.           |  | -                    |  | Product - Customer Drw |  | sheet 1 of 2 |  |     |  |   |  |

A

B


C

D

| PART NUMBER    | DIM A° |
|----------------|--------|
| 10045509-101LF | 0°     |
| 10045509-102LF | 45°    |
| 10045509-103LF | 90°    |
| 10045509-104LF | 135°   |
| 10045509-105LF | 180°   |
| 10045509-106LF | 225°   |
| 10045509-107LF | 270°   |
| 10045509-108LF | 315°   |

NOTES:

- ① MATERIAL: ZINC ALLOY.
- ② FINISH: ZINC YELLOW CHROMATE.
- ③ PRELIMINARY APPLICATION SPECIFICATION: GS-20-045.
- ④ REFER TO CUSTOMER DRAWING 10035911 FOR INFORMATION REGARDING PCB LAYOUT OF POWER AND GUIDE MODULES RELATIVE TO SIGNAL MODULES.
- ⑤ RIGHT ANGLE PIN MODULE HAS THE SAME PCB FOOTPRINT AS THE RIGHT ANGLE GUIDE SOCKET.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 7 PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION.

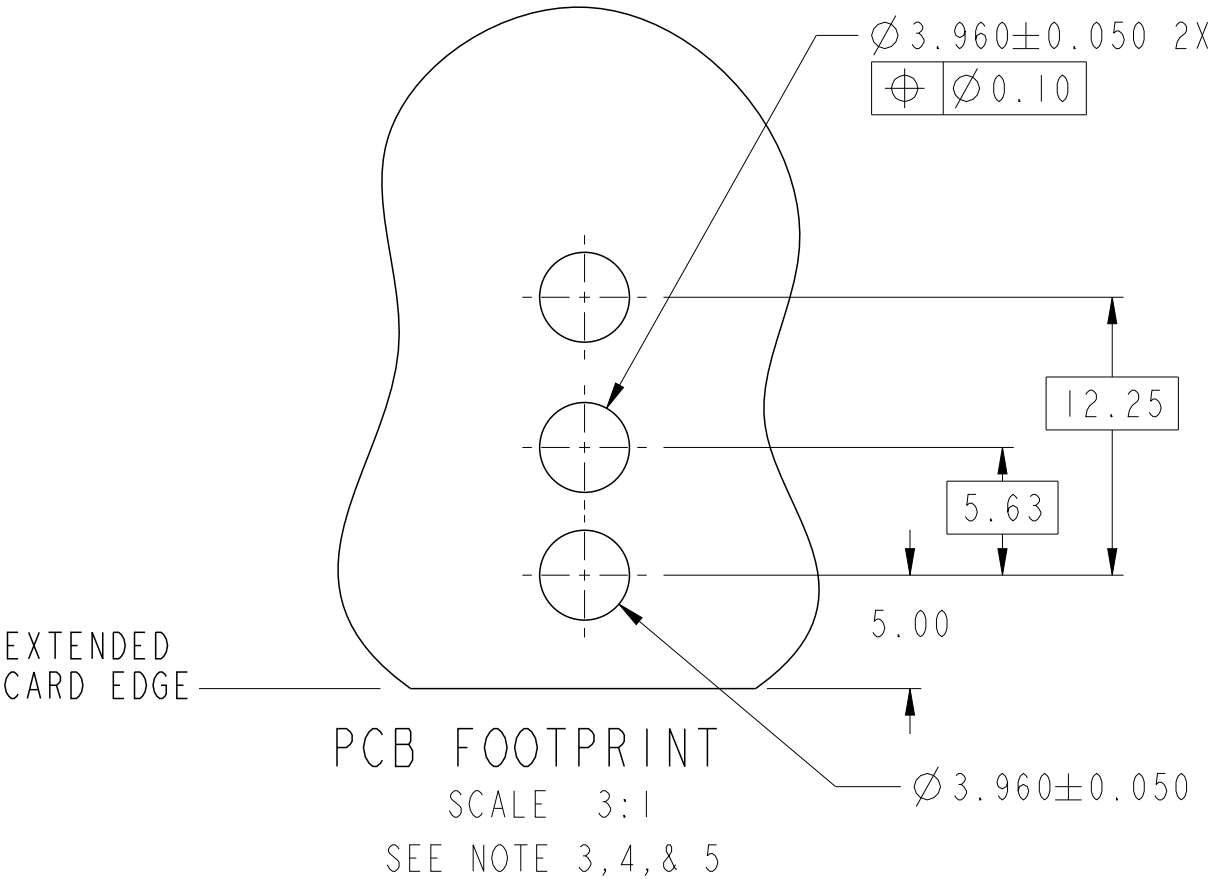

A

B

C

D



Copyright FCI.

|                                                                                               |  |                                       |  |       |  |               |  |                                                                                       |  |            |  |                                                                                       |  |                                                                                       |  |              |  |                |  |     |  |
|-----------------------------------------------------------------------------------------------|--|---------------------------------------|--|-------|--|---------------|--|---------------------------------------------------------------------------------------|--|------------|--|---------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------|--|--------------|--|----------------|--|-----|--|
| spec ref                                                                                      |  |                                       |  | dr    |  | Chen-Hong Tan |  | 2006/09/09                                                                            |  | projection |  | mm                                                                                    |  | size                                                                                  |  | A3           |  | scale          |  | 1:1 |  |
| tolerance std                                                                                 |  | TOLERANCES UNLESS OTHERWISE SPECIFIED |  |       |  | eng           |  | Yong-Keat Lim                                                                         |  | 2011/10/04 |  |  |  |  |  | ecn no       |  | ELX-S-006144-1 |  |     |  |
| ASME Y14.5                                                                                    |  |                                       |  |       |  | chr           |  | -                                                                                     |  | -          |  |                                                                                       |  |                                                                                       |  |              |  |                |  |     |  |
| -                                                                                             |  |                                       |  |       |  | appr          |  | Chen-Hong Tan                                                                         |  | 2011/10/07 |  |                                                                                       |  |                                                                                       |  |              |  |                |  |     |  |
| surface  |  | linear                                |  | 0.X   |  | ±0.3          |  |  |  | title      |  | 10.8mm R/A GUIDE PIN                                                                  |  | dwg no                                                                                |  | 10045509     |  | rev            |  | B   |  |
|                                                                                               |  |                                       |  | 0.XX  |  | ±0.10         |  |                                                                                       |  |            |  |                                                                                       |  |                                                                                       |  |              |  |                |  |     |  |
|                                                                                               |  |                                       |  | 0.XXX |  | ±0.050        |  |                                                                                       |  |            |  |                                                                                       |  |                                                                                       |  |              |  |                |  |     |  |
| ASME Y14.5                                                                                    |  | angular                               |  | 0°    |  | ±2°           |  | www.fci.com                                                                           |  | cat. no.   |  | -                                                                                     |  | Product - Customer Drw                                                                |  | sheet 2 of 2 |  |                |  |     |  |