



» [BGA Heat Sinks](#)

11-5602-45G

BGA Fan Heat Sink

Fan Size: 40x40x10.5

Fan Voltage: 5 Volts

of Bearings: Dual


Connector Housing: Molex 3 pin (series 2695)

Lead Length: 127 mm


Fan Sensor: 2 pulses/rotation

Attachment: Plastic Push Pins

RoHS:

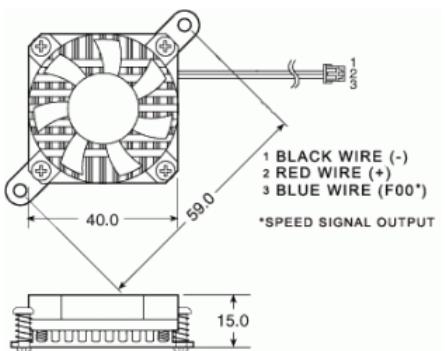

Recommended PCB Hole Pattern

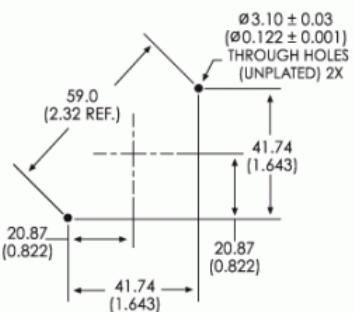

Width: 40.00

Length: 40.00

Height: 15.00

Finish: Black Anodize

Thermal Performance

Natural Convection: 3.40

(based on a heatsink temperature rise of 75 °C above ambient)

based on fully ducted airflow entering at 1.0 m/s (197 LFM).

Need assistance?

Call us: 1-855-32-AAVID

Email: estore@aavid.com

» [Help Page](#)

[Request a Sample ▶](#)


[Request a Quote ▶](#)

[Ask an Engineer ▶](#)

» [Product Return Policy](#)

» [Terms & Conditions](#)

» [Privacy Policy](#)

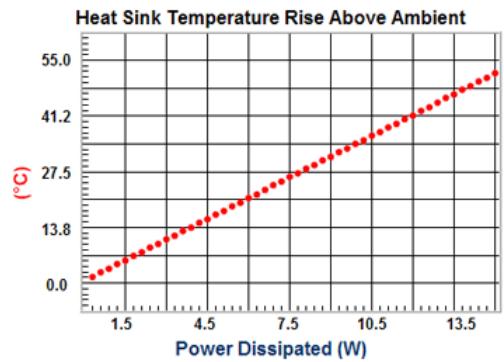Thermal Curve:**Customer Assistance**

[Contact Us](#)
[Get Design Assistance](#)
[Find a Distributor](#)
[Find a Sales Rep](#)
[Request a Quote](#)
[Placing an Order](#)
[Terms and Conditions](#)
[Returns](#)

Popular Products

[Extrusions](#)
[Board Level](#)
[Liquid Cooling](#)
[Heat Pipe Technology](#)
[Heat Sink Accessories](#)
[Interface Materials](#)

Our Company

[About Aavid](#)
[News and Events](#)
[Management Team](#)
[Worldwide Locations](#)
[Directions to Headquarters](#)
[Disclaimer](#)
[Customer Survey](#)
[Privacy Policy](#)

Sign up to receive Aavid news & alerts

go



Aavid will lead the electronics thermal management industry worldwide. We will be the first company customers call to enable their thermal designs anywhere in the world. We will respond with extraordinary speed and will provide them with timely and cost-effective solutions because we understand their needs, their industry, and their culture. 2012 Aavid Thermalloy, LLC