

Features:

- High reliability
- Very sharp reverse characteristic
- Zener voltage 3.3 to 12 V
- V_Z -tolerance $\pm 5\%$

Applications:

Voltage stabilization



Absolute Maximum Ratings $T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Power dissipation	$T_{\text{amb}} \leq 75^\circ\text{C}$	P_V	500	mW
Z-current	-	I_Z	P_V / V_Z	mA
Junction temperature	-	T_j	200	$^\circ\text{C}$
Storage temperature range	-	T_{stg}	-65 to +200	$^\circ\text{C}$

Maximum Thermal Resistance $T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Value	Unit
Junction ambient	$l = 9.5 \text{ mm (3/8 inches)}$ $T_L = \text{constant}$	R_{thJA}	300	K/W

Stresses exceeding maximum ratings may damage the device. Maximum ratings are stress ratings only. Functional operation above the recommended operating conditions is not implied. Extended exposure to stresses above the recommended operating conditions may affect device reliability.

Electrical Characteristics $T_j = 25^\circ\text{C}$

Parameter	Test Conditions	Symbol	Maximum	Unit
Forward voltage	$I_F = 200 \text{ mA}$	V_F	1.5	V

Specification Table

Type	$V_{Z\text{nom}}^{1)}$	I_{ZT} for Z_{ZT}		I_R at V_R		$I_{ZM}^{2)}$
	V	mA	Ω	μA	V	mA
1N746A	3.3	20	28	10	1	110
1N747A	3.6	20	24	10	1	100
1N748A	3.9	20	23	10	1	95
1N749A	4.3	20	22	2	1	85
1N750A	4.7	20	19	2	1	75
1N751A	5.1	20	17	1	1	70
1N752A	5.6	20	11	1	1	65
1N753A	6.2	20	7	0.1	1	60
1N754A	6.8	20	5	0.1	1	55

Zener Diode



Specification Table

Type	$V_{Znom}^{1)}$	I_{ZT} for Z_{ZT}		I_R at V_R		$I_{ZM}^{2)}$
	V	mA	Ω	μA	V	mA
1N755A	7.5	20	6	0.1	1	50
1N756A	8.2	20	8	0.1	1	45
1N757A	9.1	20	10	0.1	1	40
1N758A	10	20	17	0.1	1	35
1N759A	12	20	30	0.1	1	30





1) Tolerance and voltage designation (V_Z):

The type numbers shown have a standard tolerance of $\pm 5\%$ on the nominal zener voltage, C for $\pm 2\%$, D for $\pm 1\%$

2) Maximum zener current ratings (I_{ZM}):

Maximum zener current ratings are based on maximum zener voltage of the individual units and JEDEC 250 mW rating

Characteristics ($T_j = 25^\circ C$ unless otherwise specified)

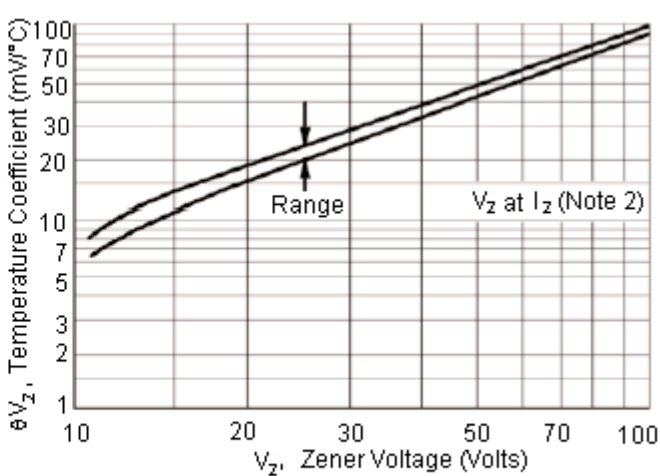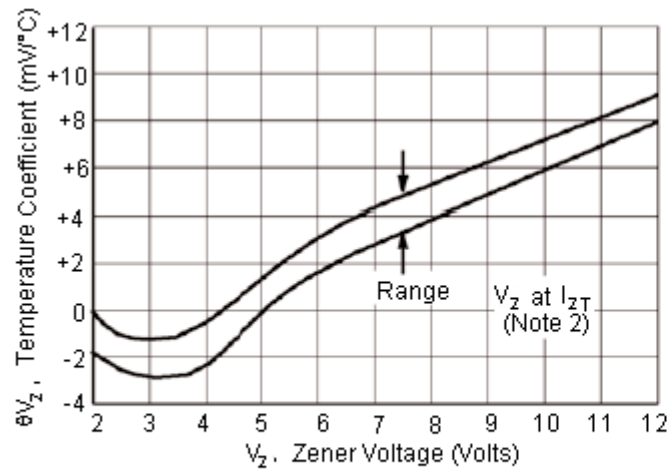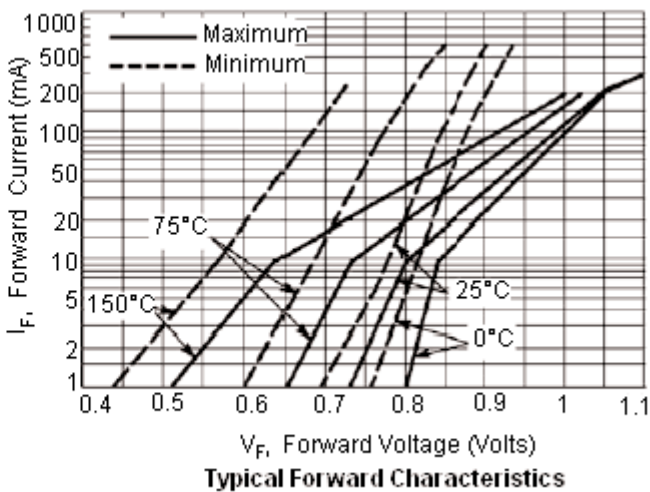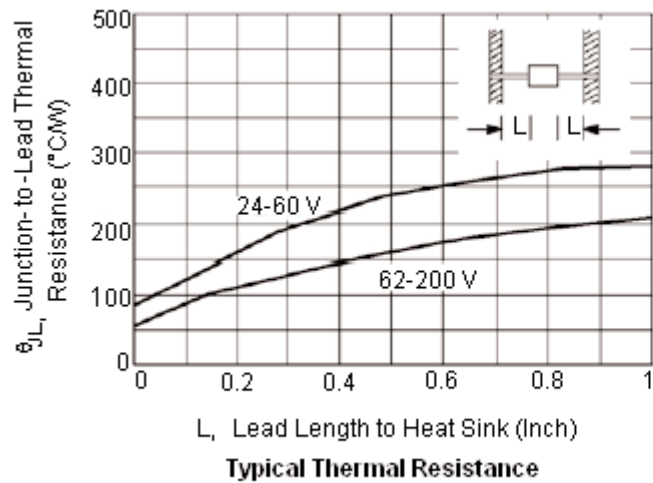

Temperature Coefficients


($-55^{\circ}C$ to $+150^{\circ}C$ temperature range; 90% of the units are in the ranges indicated.)




Zener Diode




Characteristics ($T_J = 25^{\circ}\text{C}$ unless otherwise specified)

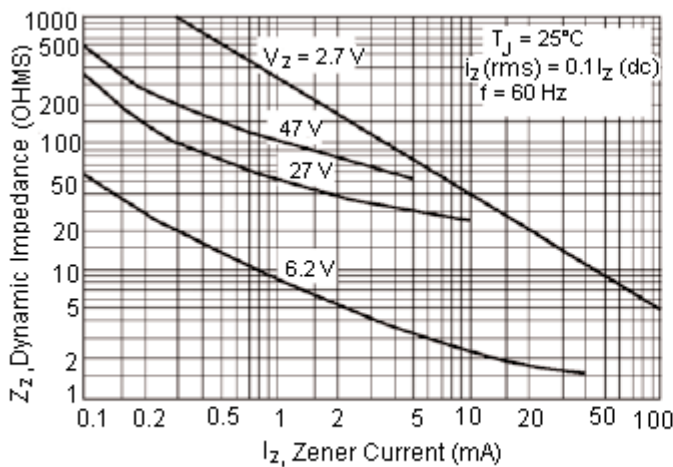

Effect of zener current on zener impedance


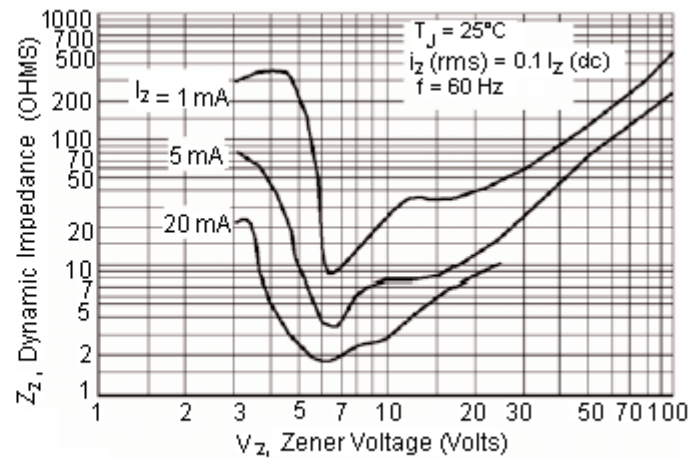


Effect of zener voltage on zener impedance

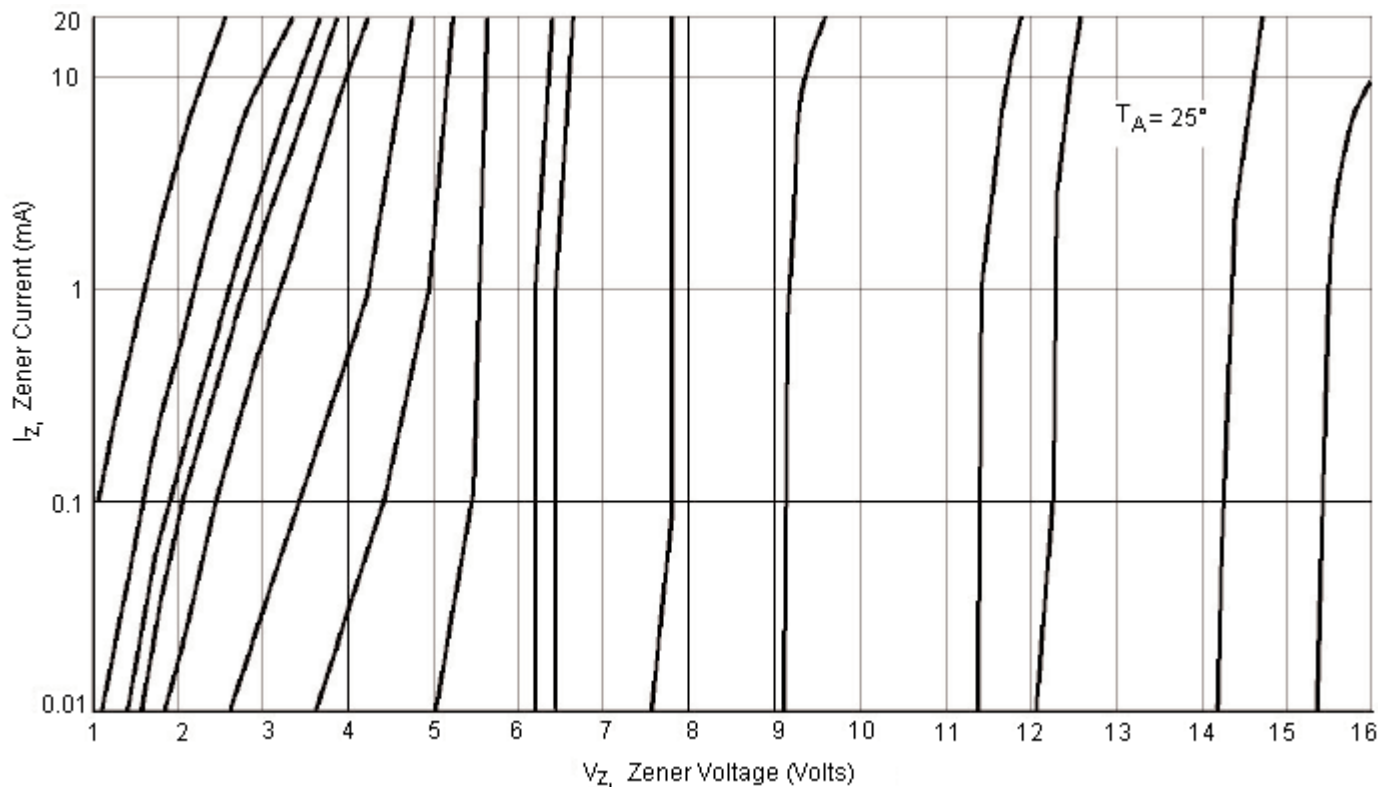


Zener Voltage versus Zener Current - $V_Z = 1$ thru 16 Volts



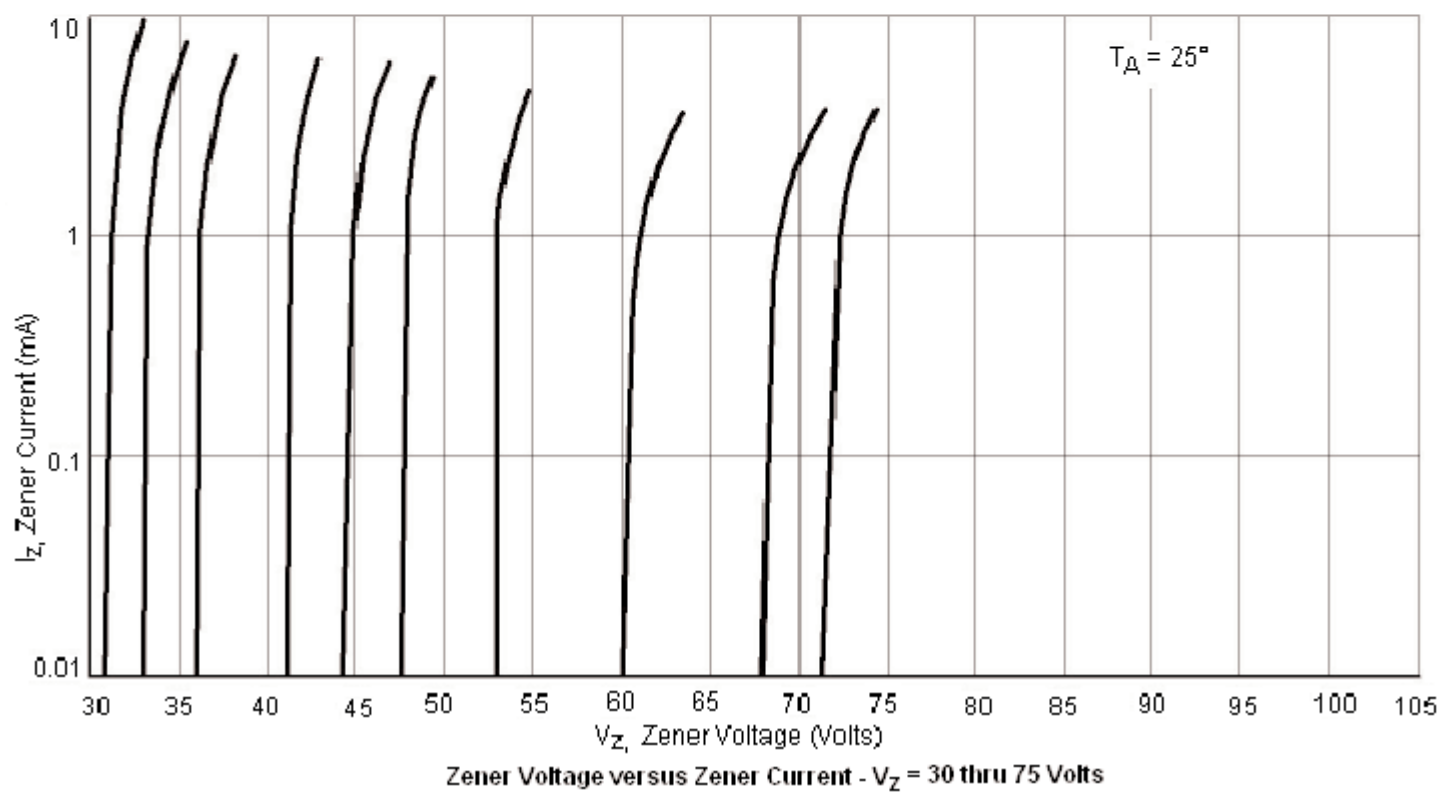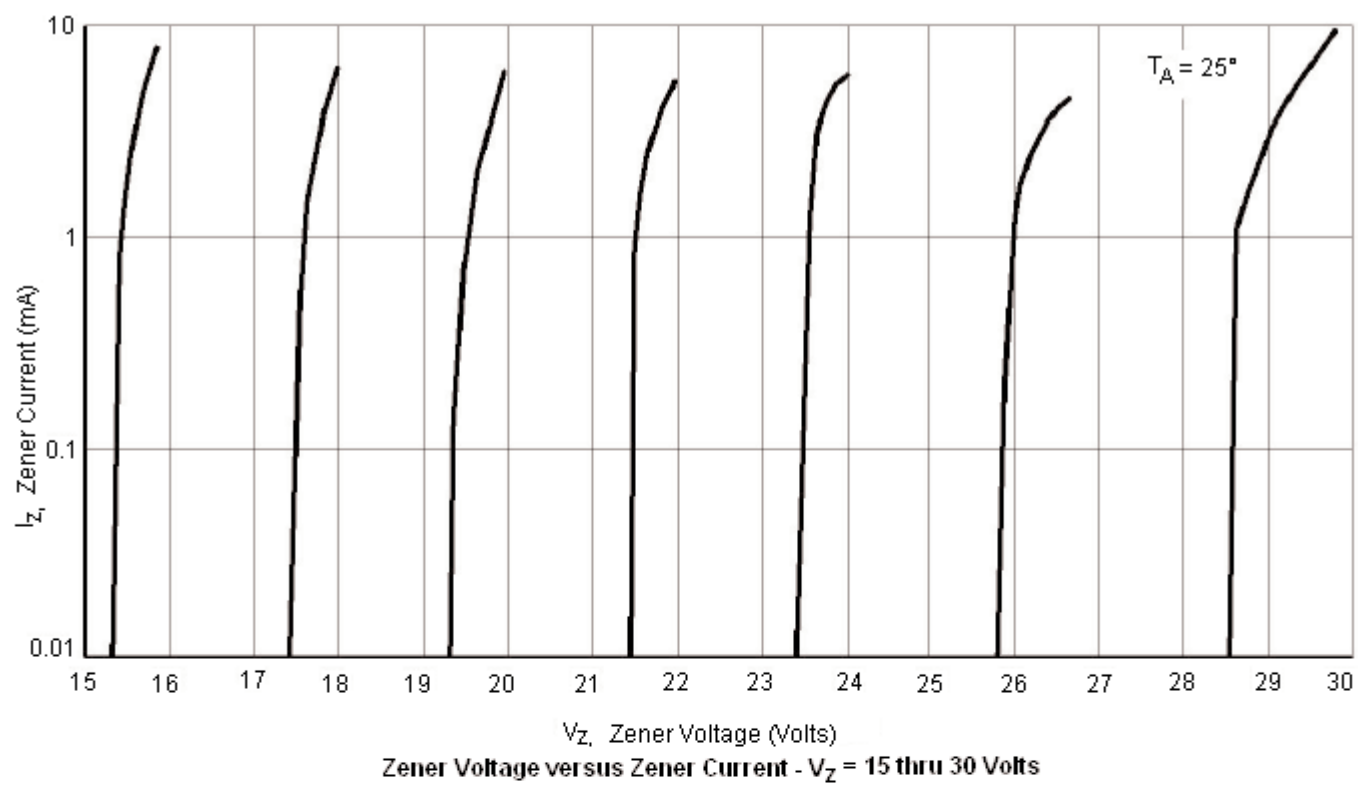


Zener Diode

Dimensions in mm

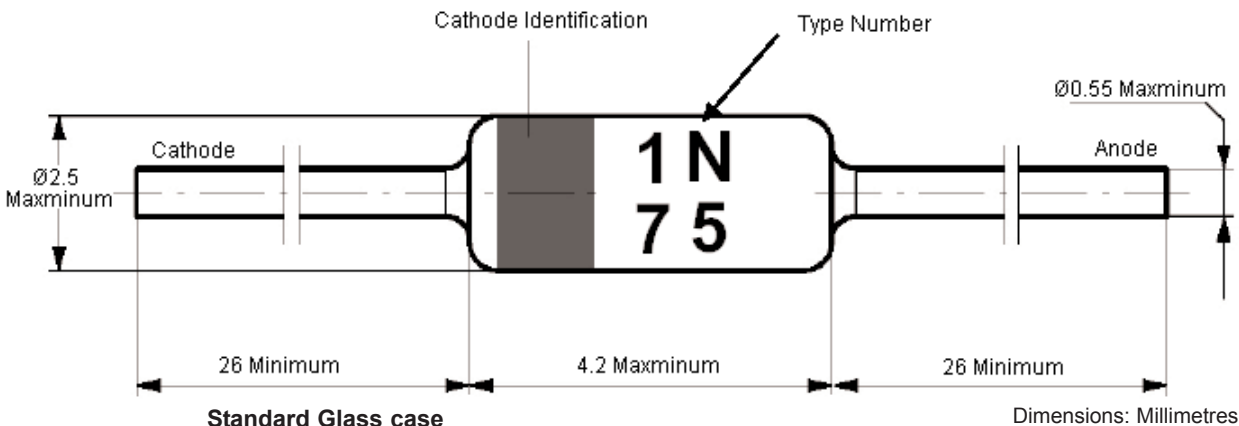

Marking



Part Number Table

Description	Part Number
Zener Diode	1N746A
Zener Diode	1N747A
Zener Diode	1N748A
Zener Diode	1N757A
Zener Diode	1N758A
Zener Diode	1N759A
Zener Diode	1N754A
Zener Diode	1N755A
Zener Diode	1N756A
Zener Diode	1N751A
Zener Diode	1N752A
Zener Diode	1N753A
Zener Diode	1N749A
Zener Diode	1N750A

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2011.