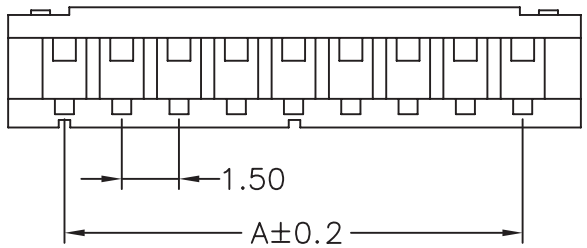

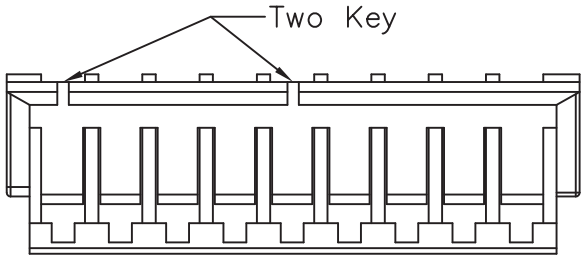

5P~15P



2P~5P

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: NYLON 66
FLAMABILITY RATING: UL94-V0
COLOR: GREY
PITCH: 1.50MM

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
INSULATOR RESISTANCE: >100 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN

STANDARD
UL CERTIFIED: E323964

PACKAGING
BAG

DIMENSION
A = 1.50 x (NB. PIN - 1)
B = 1.50 x (NB PIN) + 0.30
C = 1.50 x (NB PIN + 1)

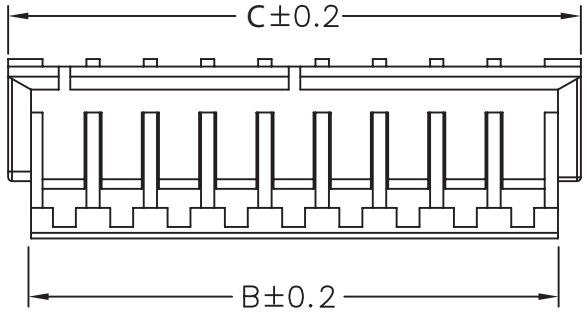



RoHS Compliant

REV	DATE	FILE	BY
G	07-AUG-13	CHARACTERISTIC	QL
F	26-OCT-11	DRAWING	JC
E	17-NOV-09	STANDARD	JP
D	28-OCT-09	INSULATOR R.	JP
C	01-FEB-07	DRAW	EC
B	31-MAR-04	LEAD FREE	JP
A	04-SEP-98	PDF	JP

PROJECTION:



APPROVAL: RJ

GENERAL TOLERANCE
.X = +/_ 0.2
.XX = +/_ 0.15

UNIT: MM
SCALE:
SHEET: 1/1
DRAW: PEARL

WÜRTH ELEKTRONIK

DESCRIPTION: 1.50 MM FEMALE TERMINAL HOUSING

WERI PART NO: 6480xx113322

SIZE
A4