

54ACT11470, 74ACT11470 8-BIT REGISTERED BUS TRANSCEIVERS WITH 3-STATE OUTPUTS

SCAS207 – D4016, APRIL 1993

- Inputs Are TTL-Voltage Compatible
- Flow-Through Architecture Optimizes PCB Layout
- Center-Pin V_{CC} and GND Configuration Minimizes High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1- μ m Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic Small-Outline Packages, Ceramic Chip Carriers, and Standard Ceramic 300-mil DIPs

description


The 'ACT11470 is an 8-bit registered bus transceiver that contains two sets of D-type flip-flops for temporary storage of data flowing in either direction. Separate clock (CLKAB or CLKBA) and output-enable ($\overline{OEAB}$ or $\overline{OEBA}$) inputs are provided for each register to permit independent control in either direction of data flow.

The A-to-B enable ($\overline{CEAB}$) input must be low in order to enter data from A or to output data to B. If both $\overline{CEAB}$ and CLKAB are low, then the B port presents the level of the A port prior to the most recent low-to-high transition of CLKAB. Data flow from B to A is similar, but requires the use of $\overline{CEBA}$, CLKBA, and $\overline{OEBA}$ inputs.


To avoid false clocking of the flip-flops, $\overline{CEAB}$ and $\overline{CEBA}$ should not be switched from low to high while CLK is low.

The 54ACT11470 is characterized for operation over the full military temperature range of –55°C to 125°C. The 74ACT11470 is characterized for operation from –40°C to 85°C.

54ACT11470 . . . JT PACKAGE
74ACT11470 . . . DW PACKAGE
(TOP VIEW)

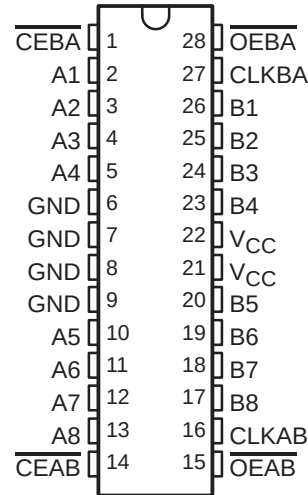

54ACT11470 . . . FK PACKAGE
(TOP VIEW)

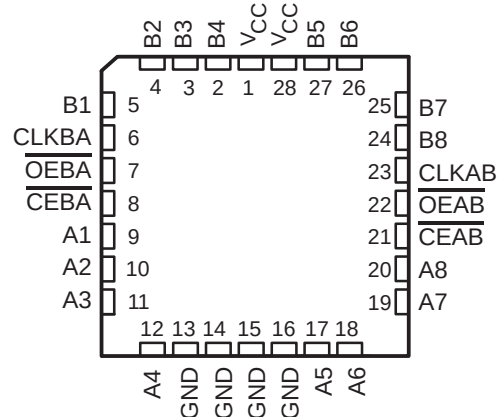

FUNCTION TABLE†

INPUTS				OUTPUT B
$\overline{CEAB}$	CLKAB	$\overline{OEAB}$	A	
H	X	X	X	Z
X	X	H	X	Z
L	L	L	X	$B_0^\ddagger$
L	↑	L	L	L
L	↑	L	H	H

† A-to-B data flow is shown; B-to-A flow is similar but uses $\overline{CEBA}$, CLKBA, and $\overline{OEBA}$.

‡ Output level before the indicated steady-state input conditions were established.

EPIC is a trademark of Texas Instruments Incorporated.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1993, Texas Instruments Incorporated


54ACT11470, 74ACT11470

8-BIT REGISTERED BUS TRANSCEIVERS


WITH 3-STATE OUTPUTS

SCAS207 – D4016, APRIL 1993

logic symbol†

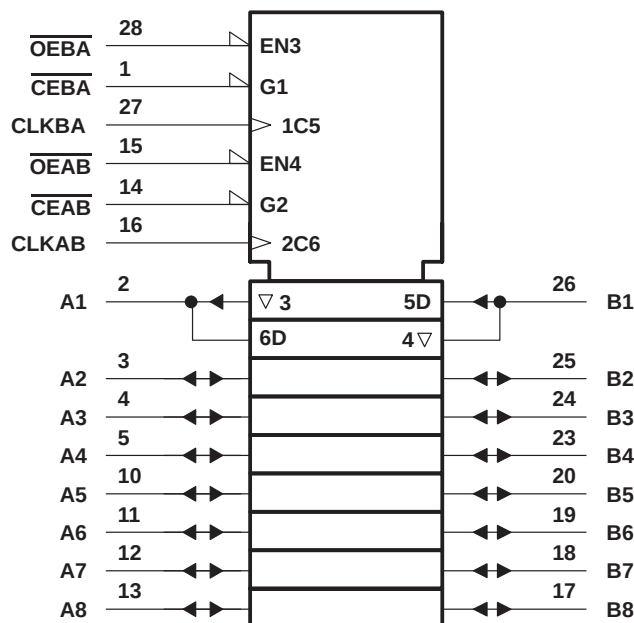

logic diagram (positive logic)

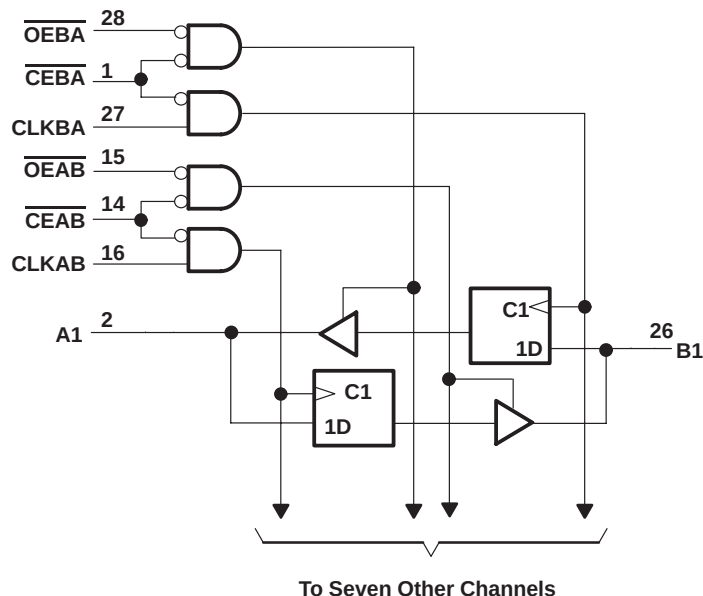

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

Pin numbers shown are for the DW, JT, and NT packages.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)‡

Supply voltage range, V_{CC}	–0.5 to 7 V
Input voltage range, V_I (see Note 1)	–0.5 to $V_{CC} + 0.5$ V
Output voltage range, V_O (see Note 1)	–0.5 to $V_{CC} + 0.5$ V
Input clamp current, I_{IK} ($V_I < 0$ or $V_I > V_{CC}$)	± 20 mA
Output clamp current, I_{OK} ($V_O < 0$ or $V_O > V_{CC}$)	± 50 mA
Continuous output current, I_O ($V_O = 0$ to V_{CC})	± 50 mA
Continuous current through V_{CC} or GND	± 200 mA
Storage temperature range	–65°C to 150°C

‡ Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

54ACT11470, 74ACT11470
8-BIT REGISTERED BUS TRANSCEIVERS
WITH 3-STATE OUTPUTS
 SCAS207 – D4016, APRIL 1993

recommended operating conditions (see Note 2)

		54ACT11470			74ACT11470			UNIT
		MIN	NOM	MAX	MIN	NOM	MAX	
V _{CC}	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V _{IH}	High-level input voltage	2			2			V
V _{IL}	Low-level input voltage			0.8			0.8	V
V _I	Input voltage	0		V _{CC}	0		V _{CC}	V
V _O	Output voltage	0		V _{CC}	0		V _{CC}	V
I _{OH}	High-level output current			–24			–24	mA
I _{OL}	Low-level output current			24			24	mA
Δt/Δv	Input transition rise or fall rate	0		10	0		10	ns/V
T _A	Operating free-air temperature	–55		125	–40		85	°C

NOTE 2: Unused or floating pins (input or I/O) must be held high or low.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	V _{CC}	T _A = 25°C			54ACT11470		74ACT11470		UNIT
				MIN	TYP	MAX	MIN	MAX	MIN	MAX	
V _{OH}		I _{OH} = –50 μA	4.5 V	4.4			4.4		4.4		V
			5.5 V	5.4			5.4		5.4		
		I _{OH} = –24 mA	4.5 V	3.94			3.7		3.8		
			5.5 V	4.94			4.7		4.8		
		I _{OH} = –50 mA [†]	5.5 V				3.85				
		I _{OH} = –75 mA [†]	5.5 V						3.85		
V _{OL}		I _{OL} = 50 μA	4.5 V			0.1	0.1		0.1		V
			5.5 V			0.1	0.1		0.1		
		I _{OL} = 24 mA	4.5 V			0.36	0.5		0.44		
			5.5 V			0.36	0.5		0.44		
		I _{OL} = 50 mA [†]	5.5 V				1.65				
		I _{OL} = 75 mA [†]	5.5 V						1.65		
I _I	Control inputs	V _I = V _{CC} or GND	5.5 V			±0.1		±1		±1	μA
I _{OZ} [‡]	A or B ports	V _O = V _{CC} or GND	5.5 V			±0.5		±10		±5	μA
I _{CC}		V _I = V _{CC} or GND, I _O = 0	5.5 V			8		160		80	μA
ΔI _{CC} [§]		One input at 3.4 V, Other inputs at V _{CC} or GND	5.5 V			0.9		1		1	mA
C _i	Control inputs	V _I = V _{CC} or GND	5 V			4.5					pF
C _{iO}	A or B ports	V _O = V _{CC} or GND	5 V			12					pF

[†] Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.

[‡] For I/O ports, the parameter I_{OZ} includes the input leakage current.

[§] This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0 V or V_{CC}.

54ACT11470, 74ACT11470

8-BIT REGISTERED BUS TRANSCEIVERS

WITH 3-STATE OUTPUTS

SCAS207 – D4016, APRIL 1993

timing requirements over recommended operating free-air temperature range, $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

			$T_A = 25^\circ\text{C}$		54ACT11470		74ACT11470		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
f_{clock}	Clock frequency		0	90	0	90	0	90	MHz
t_w	Pulse duration	CLK high or low	5.5		5.5		5.5		ns
t_{su}	Setup time	Data before $\text{CLK}\uparrow$	2		2		2		ns
		Data before $\overline{\text{CEAB}}\uparrow$ or $\overline{\text{CEBA}}\uparrow$	2		2		2		
t_h	Hold time	Data after $\text{CLK}\uparrow$	3		3		3		ns
		Data after $\overline{\text{CEAB}}\uparrow$ or $\overline{\text{CEBA}}\uparrow$	3		3		3		

switching characteristics over recommended operating free-air temperature range, $V_{CC} = 5\text{ V} \pm 0.5\text{ V}$ (unless otherwise noted) (see Figure 1)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$T_A = 25^\circ\text{C}$			54ACT11470		74ACT11470		UNIT
			MIN	TYP	MAX	MIN	MAX	MIN	MAX	
f_{max}			90			90		90		MHz
t_{PLH}	CLKAB or CLKBA	A or B	3.4	7.3	9	3.4	10.7	3.4	10.1	ns
t_{PHL}			4.2	8.3	10.2	4.2	12	4.2	11.4	
t_{PZH}	$\overline{\text{OEAB}}$ or $\overline{\text{OEBA}}$	B or A	3	7	9.5	3	11.5	3	10.5	ns
t_{PZL}			4.3	8.6	11.4	4.3	15	4.3	13.7	
t_{PHZ}	$\overline{\text{OEAB}}$ or $\overline{\text{OEBA}}$	B or A	4.5	7.9	9.6	4.5	11	4.5	10.5	ns
t_{PLZ}			5.1	7.7	9.5	5.1	10.7	5.1	10.2	
t_{PZH}	$\overline{\text{CEAB}}$ or $\overline{\text{CEBA}}$	B or A	3.4	7.3	10	3.4	12	3.4	11.1	ns
t_{PZL}			4.6	9	11.9	4.6	15.5	4.6	14.2	
t_{PHZ}	$\overline{\text{CEAB}}$ or $\overline{\text{CEBA}}$	B or A	4.8	7.9	9.9	4.8	11.4	4.8	10.9	ns
t_{PLZ}			5.1	7.9	9.8	5.1	11.2	5.1	10.7	


operating characteristics, $V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

PARAMETER			TEST CONDITIONS		TYP	UNIT
C_{pd}	Power dissipation capacitance per transceiver	Outputs enabled	$C_L = 50\text{ pF}$, $f = 1\text{ MHz}$		41	pF
		Outputs disabled			27	





PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



PARAMETER MEASUREMENT INFORMATION

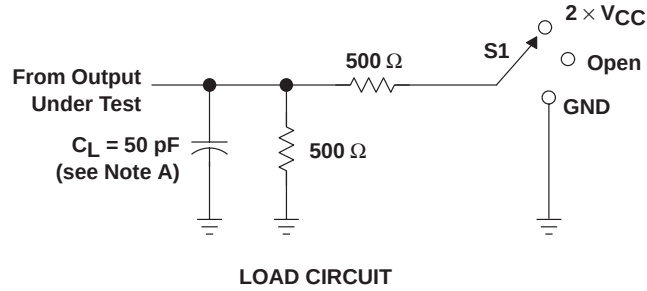

TEST	S1
t_{PLH}/t_{PHL}	Open
t_{PLZ}/t_{PZL}	2 $\times V_{CC}$
t_{PHZ}/t_{PZH}	GND

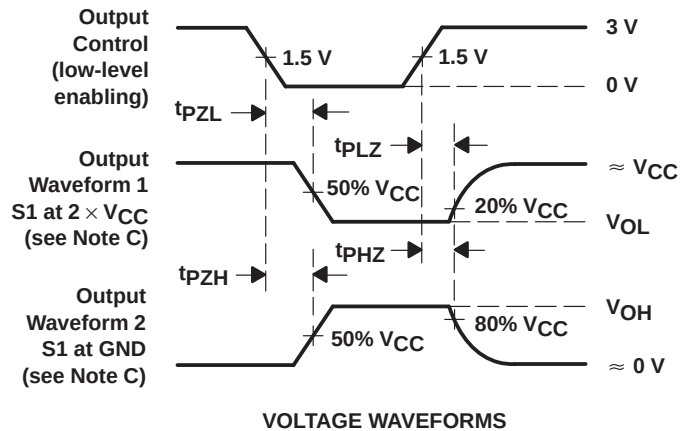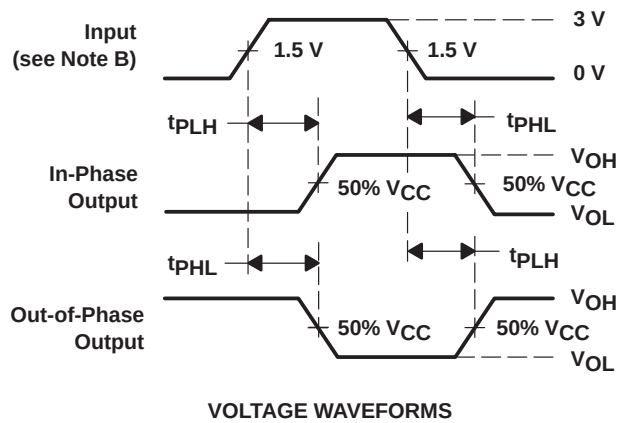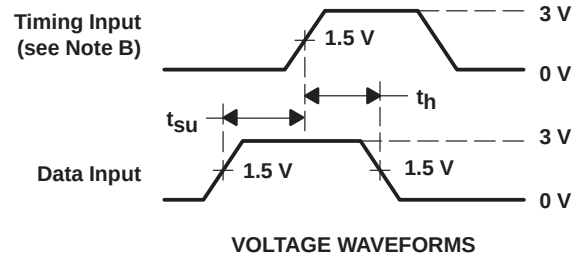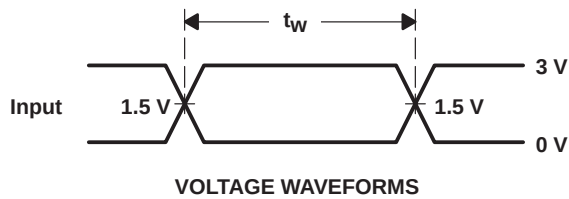

- NOTES: A. C_L includes probe and jig capacitance.
B. All input pulses are supplied by generators having the following characteristics: $PRR \leq 10 \text{ MHz}$, $Z_O = 50 \Omega$, $t_r = 3 \text{ ns}$, $t_f = 3 \text{ ns}$.
C. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
D. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.