

Customer Information Sheet

DRAWING No.: M52-511XX45

SHEET 2 OF 2


IF IN DOUBT - ASK

(C)




NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

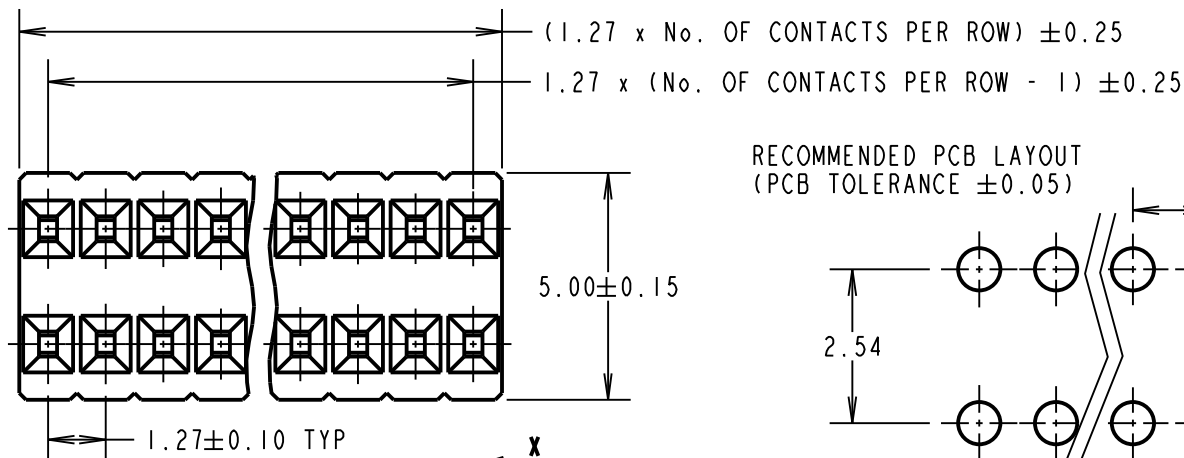

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

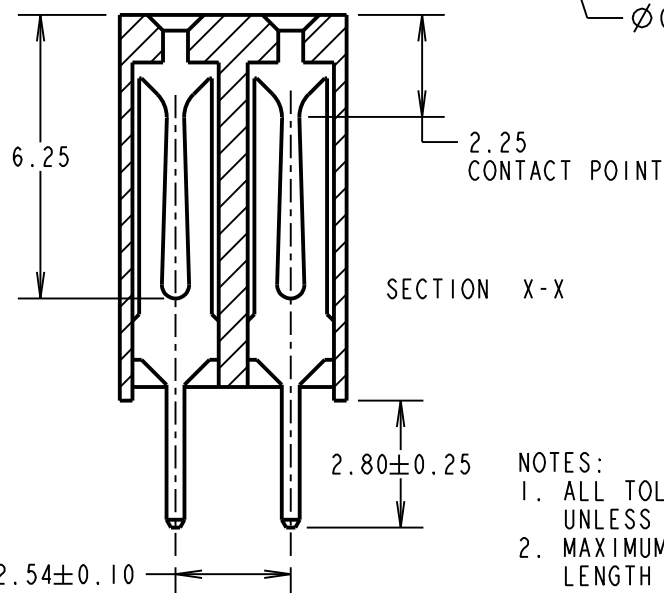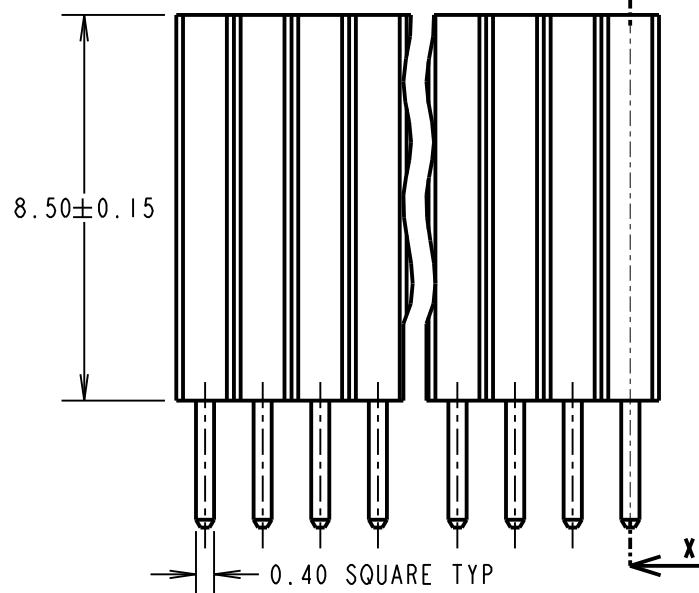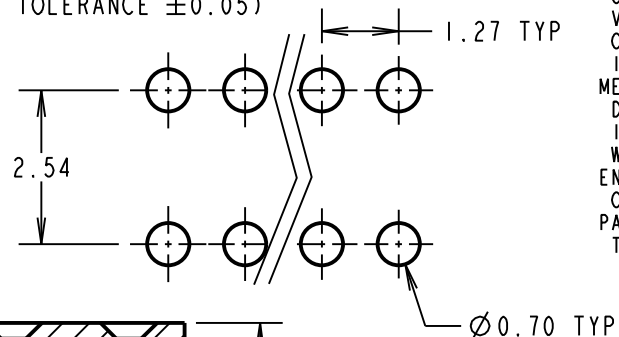

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 9T UL94V-0, BLACK
CONTACT = PHOSPHOR BRONZE

FINISH:

CONTACT = GOLD OVER NICKEL

ELECTRICAL:

CURRENT RATING = 1A
VOLTAGE PROOF = 1000V ACrms/DC
CONTACT RESISTANCE = $30\text{m}\Omega$ MAX
INSULATION RESISTANCE = $1,000\text{M}\Omega$ MIN

MECHANICAL:

DURABILITY = 300 CYCLES MIN
INSERTION FORCE = 1.5N MAX PER CONTACT
WITHDRAWAL FORCE = 0.10N MIN PER CONTACT

ENVIRONMENTAL:

OPERATING TEMPERATURE = -40°C TO $+105^\circ\text{C}$

PACKING:

TUBE

ORDER CODE:

M52-511XX45

No. OF WAYS PER ROW
02 TO 40

FINISH: GOLD

NOTES:

1. ALL TOLERANCES ARE ± 0.12 UNLESS OTHERWISE STATED.
2. MAXIMUM MATING PIN LENGTH = 6.10mm.

SB	7	25.09.12	11832
NAME	ISS.	DATE	C/NOTE
APPROVED:	S.BENNETT		
CHECKED:	S.FLOWER		
DRAWN:	J. ENRIGHT		
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

~~X. = $\pm 1\text{mm}$~~
~~X.X = $\pm 0.25\text{mm}$~~
~~X.XX = $\pm 0.10\text{mm}$~~
~~X.XXX = $\pm 0.01\text{mm}$~~

ANGLES = $\pm 5^\circ$

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH:

SEE ABOVE

S/AREA:

mm²

TITLE:

1.27mm PITCH DIL
VERTICAL PC TAIL SOCKET ASSY

DRAWING NUMBER:

M52-511XX45

SHT
2
OF 2