

TECHNICAL SPECIFICATION TABLE

| CODES and COLOURS |          |           | INT.     | REMOV. | WHEELS | INTERNAL DIMENSIONS (mm.) |     |     |    |       | EXT. DIMENSIONS (mm.) |     |     | WEIGHT | BUOYANCY  | VOLUME |
|-------------------|----------|-----------|----------|--------|--------|---------------------------|-----|-----|----|-------|-----------------------|-----|-----|--------|-----------|--------|
| BLACK             | ORANGE   | GREEN     | CONFIG.  | LID    |        | A                         | B   | C   | D  | E     | A                     | B   | C   | Kg.    | *Kg. max. | Litres |
| 1908.B E          | 1908.O E | 1908.G E  | empty    | ---    | ---    | 190                       | 125 | 85  | 20 | 65    | 216                   | 180 | 102 | 0,70   | 1,4       | 2,0    |
| 1908.B            | 1908.O   | 1908.G    | w/foam   | ---    | ---    | 190                       | 125 | 85  | 20 | 65    | 216                   | 180 | 102 | 0,80   | 1,4       | 2,0    |
| 1913.B E          | 1913.O E | 1913.G E  | empty    | ---    | ---    | 190                       | 125 | 135 | 20 | 115   | 216                   | 180 | 152 | 0,85   | 2,4       | 3,2    |
| 1913.B            | 1913.O   | 1913.G    | w/foam   | ---    | ---    | 190                       | 125 | 135 | 20 | 115   | 216                   | 180 | 152 | 0,92   | 2,4       | 3,2    |
| 2209.B E          | 2209.O E | 2209.G E  | empty    | ---    | ---    | 220                       | 160 | 95  | 20 | 75    | 246                   | 215 | 112 | 0,88   | 2,3       | 3,3    |
| 2209.B            | 2209.O   | 2209.G    | w/foam   | ---    | ---    | 220                       | 160 | 95  | 20 | 75    | 246                   | 215 | 112 | 0,99   | 2,3       | 3,3    |
| 2214.B E          | 2214.O E | 2214.G E  | empty    | ---    | ---    | 220                       | 160 | 145 | 20 | 125   | 246                   | 215 | 162 | 1,16   | 3,9       | 5,1    |
| 2214.B            | 2214.O   | 2214.G    | w/foam   | ---    | ---    | 220                       | 160 | 145 | 20 | 125   | 246                   | 215 | 162 | 1,29   | 3,9       | 5,1    |
| 2712.B E          | 2712.O E | 2712.G E  | empty    | YES    | ---    | 276                       | 200 | 120 | 35 | 85    | 305                   | 270 | 144 | 1,62   | 4,2       | 6,6    |
| 2712.B            | 2712.O   | 2712.G    | w/foam   | YES    | ---    | 276                       | 200 | 120 | 35 | 85    | 305                   | 270 | 144 | 1,83   | 4,2       | 6,6    |
| 2717.B E          | 2717.O E | 2717.G E  | empty    | YES    | ---    | 276                       | 200 | 170 | 35 | 135   | 305                   | 270 | 194 | 1,93   | 6,7       | 9,3    |
| 2717.B            | 2717.O   | 2717.G    | w/foam   | YES    | ---    | 276                       | 200 | 170 | 35 | 135   | 305                   | 270 | 194 | 2,12   | 6,7       | 9,3    |
| 3317.B E          | 3317.O E | 3317.G E  | empty    | YES    | ---    | 330                       | 234 | 170 | 68 | 102   | 360                   | 304 | 194 | 2,29   | 7,0       | 13,1   |
| 3317.B            | 3317.O   | 3317.G    | w/foam   | YES    | ---    | 330                       | 234 | 170 | 68 | 102   | 360                   | 304 | 194 | 2,51   | 7,0       | 13,1   |
| 3818.B E          | 3818.O E | 3818.G E  | empty    | ---    | ---    | 380                       | 270 | 180 | 45 | 135   | 410                   | 340 | 205 | 3,14   | 12,4      | 18,4   |
| 3818.B            | 3818.O   | 3818.G    | w/foam   | ---    | ---    | 380                       | 270 | 180 | 45 | 135   | 410                   | 340 | 205 | 3,58   | 12,4      | 18,4   |
| 4412.B E          | 4412.O E | 4412.G E  | empty    | YES    | ---    | 445                       | 345 | 125 | 47 | 78    | 474                   | 415 | 149 | 3,40   | 10,7      | 19,2   |
| 4412.B            | 4412.O   | 4412.G    | w/foam   | YES    | ---    | 445                       | 345 | 125 | 47 | 78    | 474                   | 415 | 149 | 3,90   | 10,7      | 19,2   |
| 4412.B C          | -        | 4412.G C  | BAG-PC44 | YES    | ---    | 445                       | 345 | 125 | 47 | 78    | 474                   | 415 | 149 | 4,20   | 10,7      | 19,2   |
| 4419.B E          | 4419.O E | 4419.G E  | empty    | YES    | ---    | 445                       | 345 | 190 | 47 | 143   | 474                   | 415 | 214 | 4,00   | 19,7      | 29,2   |
| 4419.B            | 4419.O   | 4419.G    | w/foam   | YES    | ---    | 445                       | 345 | 190 | 47 | 143   | 474                   | 415 | 214 | 4,70   | 19,7      | 29,2   |
| 4820.B E          | 4820.O E | 4820.G E  | empty    | ---    | ---    | 480                       | 370 | 205 | 50 | 155   | 520                   | 435 | 230 | 4,64   | 24,7      | 35,5   |
| 4820.B            | 4820.O   | 4820.G    | w/foam   | ---    | ---    | 480                       | 370 | 205 | 50 | 155   | 520                   | 435 | 230 | 5,40   | 24,7      | 35,5   |
| 5117.B E          | 5117.O E | 5117.G E  | empty    | YES    | ---    | 517                       | 277 | 173 | 50 | 123   | 546                   | 347 | 197 | 3,80   | 15,8      | 24,7   |
| 5117.B            | 5117.O   | 5117.G    | w/foam   | YES    | ---    | 517                       | 277 | 173 | 50 | 123   | 546                   | 347 | 197 | 4,50   | 15,8      | 24,7   |
| 5122.B E          | 5122.O E | 5122.G E  | empty    | YES    | YES    | 517                       | 277 | 217 | 50 | 167** | 546                   | 347 | 247 | 6,00   | 21,5      | 31,0   |
| 5122.B            | 5122.O   | 5122.G    | w/foam   | YES    | YES    | 517                       | 277 | 217 | 50 | 167** | 546                   | 347 | 247 | 7,00   | 21,5      | 31,0   |
| 5822.B E          | 5822.O E | 5822.G E  | empty    | ---    | ---    | 580                       | 440 | 220 | 60 | 160   | 650                   | 510 | 242 | 6,96   | 36,7      | 56,1   |
| 5822.B            | 5822.O   | 5822.G    | w/foam   | ---    | ---    | 580                       | 440 | 220 | 60 | 160   | 650                   | 510 | 242 | 8,19   | 36,7      | 56,1   |
| 5833.B E          | 5833.O E | 5833.G E  | empty    | ---    | YES    | 580                       | 440 | 330 | 60 | 270   | 682                   | 510 | 355 | 9,55   | 62,0      | 84,2   |
| 5833.B            | 5833.O   | 5833.G    | w/foam   | ---    | YES    | 580                       | 440 | 330 | 60 | 270   | 682                   | 510 | 355 | 11,66  | 62,0      | 84,2   |
| 7630.B E          | 7630.O E | 7630.G E  | empty    | ---    | YES    | 765                       | 485 | 305 | 60 | 245   | 860                   | 560 | 330 | 11,20  | 81,8      | 113,1  |
| 7630.B            | 7630.O   | 7630.G    | w/foam   | ---    | YES    | 765                       | 485 | 305 | 60 | 245   | 860                   | 560 | 330 | 14,03  | 81,8      | 113,1  |
| 7641.B E          | 7641.O E | 7641.G E  | empty    | ---    | YES    | 765                       | 485 | 415 | 60 | 355   | 860                   | 560 | 435 | 12,07  | 118,5     | 153,9  |
| 7641.B            | 7641.O   | 7641.G    | w/foam   | ---    | YES    | 765                       | 485 | 415 | 60 | 355   | 860                   | 560 | 435 | 15,92  | 118,5     | 153,9  |
| 11413.B E         | -        | 11413.G E | empty    | ---    | YES    | 1136                      | 350 | 135 | 42 | 93    | 1189                  | 415 | 159 | 7,80   | 33,3      | 53,7   |
| 11413.B           | -        | 11413.G   | w/foam   | ---    | YES    | 1136                      | 350 | 135 | 42 | 93    | 1189                  | 415 | 159 | 8,80   | 33,3      | 53,7   |
| 13513.B E         | -        | 13513.G E | empty    | ---    | YES    | 1350                      | 350 | 135 | 42 | 93    | 1410                  | 415 | 159 | 8,70   | 39,5      | 63,7   |
| 13513.B           | -        | 13513.G   | w/foam   | ---    | YES    | 1350                      | 350 | 135 | 42 | 93    | 1410                  | 415 | 159 | 9,95   | 39,5      | 63,7   |
| 13527.B E         | -        | 13527.G E | empty    | ---    | YES    | 1350                      | 350 | 272 | 42 | 230   | 1430                  | 415 | 296 | 11,70  | 97,5      | 128,5  |
| 13527.B           | -        | 13527.G   | w/foam   | ---    | YES    | 1350                      | 350 | 272 | 42 | 230   | 1430                  | 415 | 296 | 14,90  | 97,5      | 128,5  |

\* Maximum weight capacity when contents are evenly distributed that maintains buoyancy level just below the lid closure line.

\*\* In model 5122 the internal dimensions given are calculated on the deepest bottom area. However, the depth is shallower in places where allowance is made for the wheel wells and the telescopic handle well.



OEM SOLUTIONS

Explorer Cases are a genuine Made in Italy product of GT Line, european leading company in the manufacturing of technical cases for industrial and commercial applications. Our flexible manufacturing process allows us to easily and efficiently make your OEM case in any special colour and to personalize and develop specific interiors to meet your requirements.



EXPLORER CASES by GT LINE s.r.l.  
Via del Lavoro, 50/52 - 40056 Crespellano (Bo) - Italy - Tel. +39 051 65041 - Fax +39 051 734925  
www.explorercases.com - salesinternational@explorercases.com



From the European Leader in Technical Cases Manufacturing

Pictures are showing just a few examples of the many possible applications. Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described, in accordance with technical or commercial requirements. Any trademarks or logo's are property of the respective owners. Pictures Copyrights: pg. 2 Copyright Louise Murray - pg. 5 PH Mreille de la Laz - pg. 6 Copyright Sharknolact - pg. 9 PH G. Badrino, Archivo La Menta - pg. 14 (sub) PH Roberto Paci.

REV. 1 CAT. GEN. EXPL. 01/07 (ed. 11) - 5000 GB

GB '07 - rel. 1



# BUILT STRONGER TO LAST LONGER



Explorer Cases are the first of their kind to be manufactured in Europe, indeed their clean lines and good looks reflect their Italian heritage. We have produced a range of virtually indestructible durable waterproof cases providing a solution for any equipment requiring a high level of protection. Applications range from Military and Aerospace to Computer and Equipment cases while their **dust and waterproof qualities** offer absolute protection making them ideal for use in the harshest environment.

The Explorer Cases have been subjected to a series of controlled laboratory tests to prove their suitability for use in the most extreme and hazardous applications and ensure that they meet the exacting standards of: **IP67 Dustproof. Waterproof - Defence Standard 81-41 Level J STANAG 4280 (edition 2) - Conformity with the Directive 2002/95/EC.**



- Shoulder kit  
available on demand

2209.B E (empty) 2209.B (w/foam)  
2209.O E (empty) 2209.O (w/foam)  
2209.G E (empty) 2209.G (w/foam)

Int. dim.: 220x160x95 (20+75) mm  
8 11/16 x 6 5/16 x 3 3/4 (13/16 + 2 15/16) in.  
Ext. dim.: 246x215x112 mm - 9 11/16 x 8 7/16 x 4 7/16 in.  
Weight: (empty) 0,88 Kg - 1.94 Lbs  
(w/foam) 0,99 Kg - 2.18 Lbs  
Volume: (litres) 3,3  
Buoyancy: (Kg.max\*) 2,3 - (Lbs/max\*) 5.07

# AIR TIGHT



- Shoulder kit  
available on demand

1908.B E (empty) 1908.B (w/foam)  
1908.O E (empty) 1908.O (w/foam)  
1908.G E (empty) 1908.G (w/foam)

Int. dim.: 190x125x85 (20+65) mm  
7 1/2 x 4 15/16 x 3 3/8 (13/16 + 2 9/16) in.  
Ext. dim.: 216x180x102 mm - 8 1/2 x 7 1/16 x 4 in.  
Weight: (empty) 0,70 Kg - 1.54 Lbs  
(w/foam) 0,80 Kg - 1.76 Lbs  
Volume: (litres) 2,0  
Buoyancy: (Kg.max\*) 1,4 - (Lbs/max\*) 3.08



- Shoulder kit  
available on demand

2214.B E (empty) 2214.B (w/foam)  
2214.O E (empty) 2214.O (w/foam)  
2214.G E (empty) 2214.G (w/foam)

Int. dim.: 220x160x145 (20+125) mm  
8 11/16 x 6 5/16 x 5 11/16 (13/16 + 4 15/16) in.  
Ext. dim.: 246x215x162 mm - 9 11/16 x 8 7/16 x 6 3/8 in.  
Weight: (empty) 1,16 Kg - 2.56 Lbs  
(w/foam) 1,29 Kg - 2.84 Lbs  
Volume: (litres) 5,1  
Buoyancy: (Kg.max\*) 3,9 - (Lbs/max\*) 8.59



- Shoulder kit  
available on demand

1913.B E (empty) 1913.B (w/foam)  
1913.O E (empty) 1913.O (w/foam)  
1913.G E (empty) 1913.G (w/foam)

Int. dim.: 190x125x135 (20+115) mm  
7 1/2 x 4 15/16 x 5 5/16 (13/16 + 4 1/2) in.  
Ext. dim.: 216x180x152 mm - 8 1/2 x 7 1/16 x 6 in.  
Weight: (empty) 0,85 Kg - 1.87 Lbs  
(w/foam) 0,92 Kg - 2.02 Lbs  
Volume: (litres) 3,2  
Buoyancy: (Kg.max\*) 2,4 - (Lbs/max\*) 5.29



- Lid can be set to  
slide-off

2712.B E (empty) 2712.B (w/foam)  
2712.O E (empty) 2712.O (w/foam)  
2712.G E (empty) 2712.G (w/foam)

Int. dim.: 276x200x120 (35+85) mm  
10 7/8 x 7 7/8 x 4 3/4 (1 3/8 + 3 3/8) in.  
Ext. dim.: 305x270x144 mm - 12 x 10 5/8 x 5 11/16 in.  
Weight: (empty) 1,62 Kg - 3.57 Lbs  
(w/foam) 1,83 Kg - 4.03 Lbs  
Volume: (litres) 6,6  
Buoyancy: (Kg.max\*) 4,2 - (Lbs/max\*) 9.25

# OUR SUPERIOR FEATURES:

- Stronger case grants better protection of the interior
- Resistant to chemicals, water, humidity, dust
- Resistant to harsh temperatures
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories to customize your experience
- Incorporate a number of patented innovations

More Information on [www.explorercases.com](http://www.explorercases.com)



- Lid can be set to slide-off

2717.B E ☐ (empty) 2717.B ☒ (w/foam)

2717.O E ☐ (empty) 2717.O ☒ (w/foam)

2717.G E ☐ (empty) 2717.G ☒ (w/foam)

Int. dim.: 276x200x170 (35+135) mm  
10 7/8 x 7 7/8 x 6 11/16 (1 3/8 + 5 5/16) in.

Ext. dim.: 305x270x194 mm - 12 x 10 5/8 x 7 5/8 in.

Weight: (empty) 1,93 Kg - 4.25 Lbs  
(w/foam) 2,12 Kg - 4.67 Lbs

Volume: (litres) 9,3

Buoyancy: (Kg.max\*) 6,7 - (Lbs/max\*) 14.77



- Lid can be set to slide-off  
- Counterbalance supports

3317.B E ☐ (empty) 3317.B ☒ (w/foam)

3317.O E ☐ (empty) 3317.O ☒ (w/foam)

3317.G E ☐ (empty) 3317.G ☒ (w/foam)

Int. dim.: 330x234x170 (68+102) mm  
13 x 9 3/16 x 6 11/16 (2 11/16 + 4) in.

Ext. dim.: 360x304x194 mm - 14 3/16 x 11 15/16 x 7 5/8 in.

Weight: (empty) 2,29 Kg - 5.04 Lbs  
(w/foam) 2,51 Kg - 5.53 Lbs

Volume: (litres) 13,1

Buoyancy: (Kg.max\*) 7,0 - (Lbs/max\*) 15.43



- Lid can be set to slide-off  
- Shoulder kit available on demand  
- Soft grip rubber handle

4412.B E ☐ (empty) 4412.B ☒ (w/foam)

4412.O E ☐ (empty) 4412.O ☒ (w/foam)

4412.G E ☐ (empty) 4412.G ☒ (w/foam)

4412.B C ☒ (BAG-PC44) 4412.G C ☒ (BAG-PC44)

Int. dim.: 445x345x125 (47+78) mm  
17 1/2 x 13 9/16 x 4 15/16 (1 7/8 + 3 1/16) in.

Ext. dim.: 474x415x149 mm - 18 11/16 x 16 5/16 x 5 7/8 in.

Weight: (empty) 3,40 Kg - 7.49 Lbs  
(w/foam) 3,90 Kg - 8.59 Lbs

Volume: (litres) 19,2

Buoyancy: (Kg.max\*) 10,7 - (Lbs/max\*) 23.58

## BAG-PC44



4412.B C and 4412.G C models include:

- computer bag with shoulder strap (BAG-PC44)
- organized lid panel (PANEXPL44)
- shoulder strap attachment metal pins kit (to fix the shoulder strap on the case)



Shoulder strap can be attached either to the case or the computer bag.

## 4412.B C



- Counterbalance supports

3818.B E ☐ (empty) 3818.B ☒ (w/foam)

3818.O E ☐ (empty) 3818.O ☒ (w/foam)

3818.G E ☐ (empty) 3818.G ☒ (w/foam)

Int. dim.: 380x270x180 (45+135) mm  
14 15/16 x 10 5/8 x 7 1/16 (1 3/4 + 5 5/16) in.

Ext. dim.: 410x340x205 mm - 16 1/8 x 13 3/8 x 8 1/16 in.

Weight: (empty) 3,14 Kg - 6.92 Lbs  
(w/foam) 3,58 Kg - 7.89 Lbs

Volume: (litres) 18,4

Buoyancy: (Kg.max\*) 12,4 - (Lbs/max\*) 27.33



## OUR GUARANTEE

"We want you to count on Explorer Cases as the most reliable resource to carry your valuable equipment in the harshest environments. That's why we guarantee FOREVER our cases against breakage of materials and workmanship that could affect the integrity of what you carry inside. After all, it is not by coincidence that all of our unbreakable cases have met the most rigorous military standard qualifications and are now so popular in extreme environments, no matter what human being, animal or fish you come across in your life journey."

See full details on [www.explorercases.com](http://www.explorercases.com)



- Lid can be set to slide-off
- Shoulder kit available on demand
- Soft grip rubber handle

**4419.B E**  (empty) **4419.B**  (w/foam)  
**4419.O E**  (empty) **4419.O**  (w/foam)  
**4419.G E**  (empty) **4419.G**  (w/foam)

**Int. dim.:** 445x345x190 (47+143) mm  
 17 1/2 x 13 9/16 x 7 1/2 (1 7/8 + 5 5/8) in.  
**Ext. dim.:** 474x415x214 mm - 18 11/16 x 16 5/16 x 8 7/16 in.  
**Weight:** (empty) 4,00 Kg - 8.81 Lbs  
 (w/foam) 4,70 Kg - 10.36 Lbs  
**Volume:** (litres) 29,2  
**Buoyancy:** (Kg.max\*) 19,7 - (Lbs/max\*) 43.43



**4820.B E**  (empty) **4820.B**  (w/foam)  
**4820.O E**  (empty) **4820.O**  (w/foam)  
**4820.G E**  (empty) **4820.G**  (w/foam)

**Int. dim.:** 480x370x205 (50+155) mm  
 18 7/8 x 14 9/16 x 8 1/16 (1 15/16 + x6 1/8) in.  
**Ext. dim.:** 520x435x230 mm - 20 1/2 x 17 1/8 x 9 1/16 in.  
**Weight:** (empty) 4,64 Kg - 10.22 Lbs  
 (w/foam) 5,40 Kg - 11.90 Lbs  
**Volume:** (litres) 35,5  
**Buoyancy:** (Kg.max\*) 24,7 - (Lbs/max\*) 54.45

### BAG-PC48

Splittable, padded PC and divider bag. It is the ideal solution for carrying and protecting both, computer (17") and photographic equipment. Adjustable shoulder belt is included. This optional bag perfectly fits into the 4820 case.



- Lid can be set to slide-off
- Shoulder kit available on demand
- Soft grip rubber handle

**5117.B E**  (empty) **5117.B**  (w/foam)  
**5117.O E**  (empty) **5117.O**  (w/foam)  
**5117.G E**  (empty) **5117.G**  (w/foam)

**Int. dim.:** 517x277x173 (50+123) mm  
 20 3/8 x 10 7/8 x 6 13/16 (1 15/16 + 4 13/16) in.  
**Ext. dim.:** 546x347x197 mm - 21 1/2 x 13 11/16 x 7 3/4 in.  
**Weight:** (empty) 3,80 Kg - 8.37 Lbs  
 (w/foam) 4,50 Kg - 9.92 Lbs  
**Volume:** (litres) 24,7  
**Buoyancy:** (Kg.max\*) 15,8 - (Lbs/max\*) 34.83



- Lid can be set to slide-off
- Soft grip rubber handle

**5122.B E**  (empty) **5122.B**  (w/foam)  
**5122.O E**  (empty) **5122.O**  (w/foam)  
**5122.G E**  (empty) **5122.G**  (w/foam)

**Int. dim.:** 517x277x217 (50+167) mm  
 20 3/8 x 10 7/8 x 8 9/16 (1 15/16 + 6 9/16) in.  
**Ext. dim.:** 546x347x247 mm - 21 1/2 x 13 11/16 x 9 3/4 in.  
**Weight:** (empty) 6,00 Kg - 13.22 Lbs  
 (w/foam) 7,00 Kg - 15.43 Lbs  
**Volume:** (litres) 31,0  
**Buoyancy:** (Kg.max\*) 21,5 - (Lbs/max\*) 47.39




Telescopic handle



Easy to open release telescopic handle



Wheels with bearings

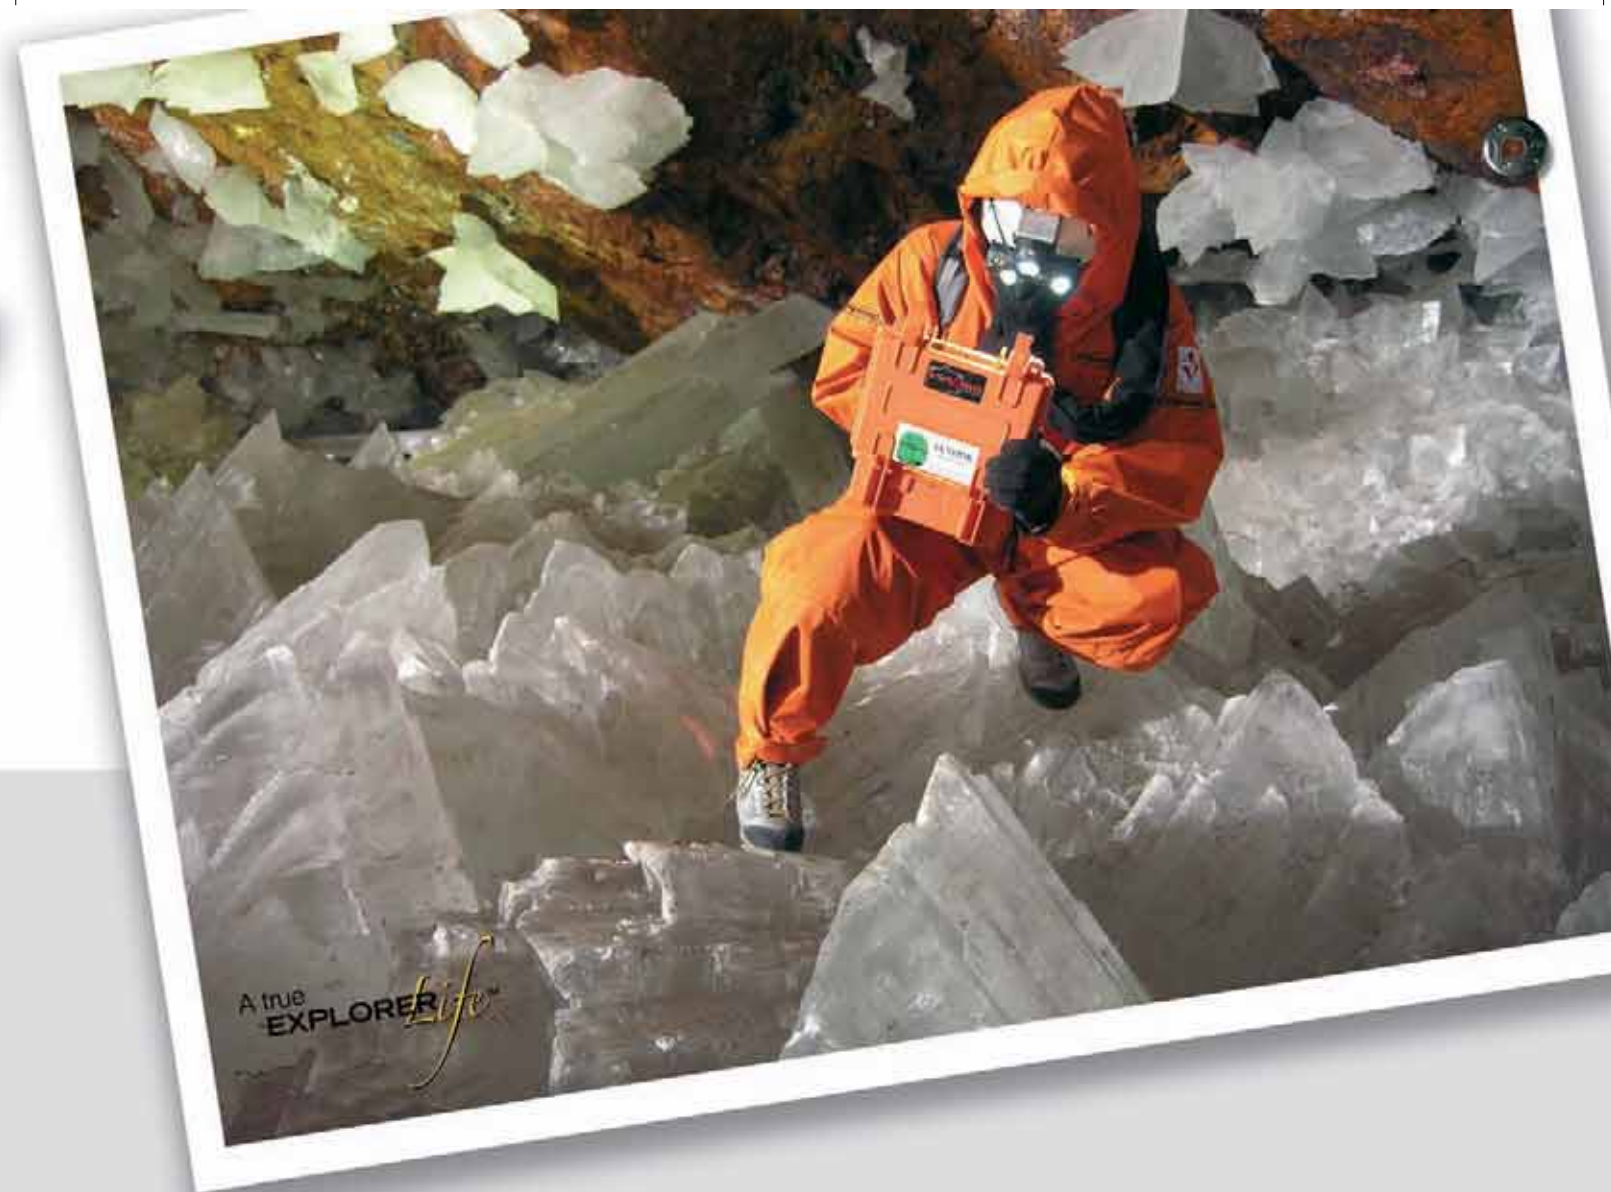

- Side handles

**5822.B E** □ (empty) **5822.B** ■ (w/foam)

**5822.O E** □ (empty) **5822.O** ■ (w/foam)

**5822.G E** □ (empty) **5822.G** ■ (w/foam)

**Int. dim.:** 580x440x220 (60+160) mm  
22 13/16 x 17 5/16 x 8 11/16 (2 3/8 + 6 5/16) in.

**Ext. dim.:** 650x510x242 mm - 25 9/16 x 20 1/16 x 9 1/2 in.

**Weight:** (empty) 6,96 Kg - 15.34 Lbs  
(w/foam) 8,19 Kg - 18.05 Lbs

**Volume:** (litres) 56,1

**Buoyancy:** (Kg.max\*) 36,7 - (Lbs/max\*) 80.90



- Side handles  
- Wheels and  
telescopic handle

**5833.B E** □ (empty) **5833.B** ■ (w/foam)

**5833.O E** □ (empty) **5833.O** ■ (w/foam)

**5833.G E** □ (empty) **5833.G** ■ (w/foam)

**Int. dim.:** 580x440x330 (60+270) mm  
22 13/16 x 17 5/16 x 13 (2 3/8 + 10 5/8) in.

**Ext. dim.:** 682x510x355 mm - 26 7/8 x 20 1/16 x 14 in.

**Weight:** (empty) 9,55 Kg - 21.05 Lbs  
(w/foam) 11,66 Kg - 25.70 Lbs

**Volume:** (litres) 84,2

**Buoyancy:** (Kg.max\*) 62,0 - (Lbs/max\*) 136.68



Self-oiling free  
running wheels



Locking telescopic  
handle



One-click unlocking  
system



- Side handles  
- Wheels  
- Large front handle  
- Retractable handle

**7630.B E** □ (empty) **7630.B** ■ (w/foam)

**7630.O E** □ (empty) **7630.O** ■ (w/foam)

**7630.G E** □ (empty) **7630.G** ■ (w/foam)

**Int. dim.:** 765x485x305 (60+245) mm  
30 1/8 x 19 1/8 x 12 (2 3/8 + 9 5/8) in.

**Ext. dim.:** 860x560x330 mm - 33 7/8 x 22 1/16 x 13 in.

**Weight:** (empty) 11,20 Kg - 24.69 Lbs  
(w/foam) 14,03 Kg - 30.93 Lbs

**Volume:** (litres) 113,1

**Buoyancy:** (Kg.max\*) 81,8 - (Lbs/max\*) 180.33



Spring loaded  
retractable handle



Self-oiling free running  
wheels



- Side handles
- Wheels

7641.B E □ (empty) 7641.B ■ (w/foam)  
7641.O E □ (empty) 7641.O ■ (w/foam)  
7641.G E □ (empty) 7641.G ■ (w/foam)

Int. dim.: 765x485x415 (60+355) mm  
30 1/8 x 19 1/8 x 16 5/16 (2 3/8 + 14) in.  
Ext. dim.: 860x560x435 mm - 33 7/8 x 22 1/16 x 17 1/8 in.  
Weight: (empty) 12,07 Kg - 26.60 Lbs  
(w/foam) 15,92 Kg - 35.09 Lbs  
Volume: (litres) 153,9  
Buoyancy: (Kg.max\*) 118,5 - (Lbs/max\*) 261.24



Self-oiling free running wheels



Two man lift side handles



- Side handles
- Wheels
- Large front handle
- Shoulder kit available on demand

**NEW**

11413.B E □ (empty) 11413.B ■ (w/foam)  
11413.G E □ (empty) 11413.G ■ (w/foam)

Int. dim.: 1136x350x135 (42+93) mm  
44 3/4 x 13 3/4 x 5 5/16 (1 5/8 + 3 11/16) in.  
Ext. dim.: 1189x415x159 mm - 46 13/16 x 16 5/16 x 6 1/4 in.  
Weight: (empty) 7,80 Kg - 17.19 Lbs  
(w/foam) 8,80 Kg - 19.40 Lbs  
Volume: (litres) 53,7  
Buoyancy: (Kg.max\*) 33,3 - (Lbs/max\*) 73.41



Two man lift side handles



Wheels with bearings



- Side handles
- Wheels
- Large front handle
- Shoulder kit available on demand

13513.B E □ (empty) 13513.B ■ (w/foam)  
13513.G E □ (empty) 13513.G ■ (w/foam)

Int. dim.: 1350x350x135 (42+93) mm  
53 1/8 x 13 3/4 x 5 5/16 (1 5/8 + 3 11/16) in.  
Ext. dim.: 1410x415x159 mm - 55 1/2 x 16 5/16 x 6 1/4 in.  
Weight: (empty) 8,70 Kg - 19.18 Lbs  
(w/foam) 9,95 Kg - 21.93 Lbs  
Volume: (litres) 63,7  
Buoyancy: (Kg.max\*) 39,5 - (Lbs/max\*) 87.08



Two man lift side handles



Wheels with bearings



- Side handles
- Wheels
- Large front handle

**NEW**

13527.B E □ (empty) 13527.B ■ (w/foam)  
13527.G E □ (empty) 13527.G ■ (w/foam)

Int. dim.: 1350x350x272 (42+230) mm  
53 1/8 x 13 3/4 x 10 11/16 (1 5/8 + 9 1/16) in.  
Ext. dim.: 1430x415x296 mm - 56 5/16 x 16 5/16 x 11 5/8 in.  
Weight: (empty) 11,70 Kg - 25.79 Lbs  
(w/foam) 14,90 Kg - 32.84 Lbs  
Volume: (litres) 128,5  
Buoyancy: (Kg.max\*) 97,5 - (Lbs/max\*) 214.95



Two man lift side handles



## CERTIFICATIONS

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2)
- Conformity with the Directive 2002/95/EC



ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS

JAM FREE LATCHES WITH USER-FRIENDLY LEVERAGE OPENING MECHANISM (from 3818 to 13513 mod.)

ALL CASES ARE PROVIDED WITH INTERNAL SLOTS FOR OPTIONAL "PANEL MOUNTING BRACKETS" OR "PANEL MOUNTING RINGS"

CORROSION PROOF METAL HINGES WITH LID STAY FEATURE

THICKER STRUCTURAL FOAM POLYPROPYLENE WALLS GUARANTEE SUPERIOR PERFORMANCE IN EXTREME ENVIRONMENTS


STANDARD MODELS AVAILABLE EMPTY OR WITH LAYERS OF PRECUBED FOAM IN THE BOTTOM AND CONVOLUTED FOAM IN THE LID. CUSTOM FOAMS AVAILABLE ON DEMAND

EXCLUSIVE PP BASED INJECTION MOLDED BODY GRANTS SUPERIOR RESISTANCE

REINFORCED CORNERS

POSITIVE STACKING LOCATION

LOAD TESTED HANDLES REINFORCED WITH CORROSION PROOF STEEL PINS

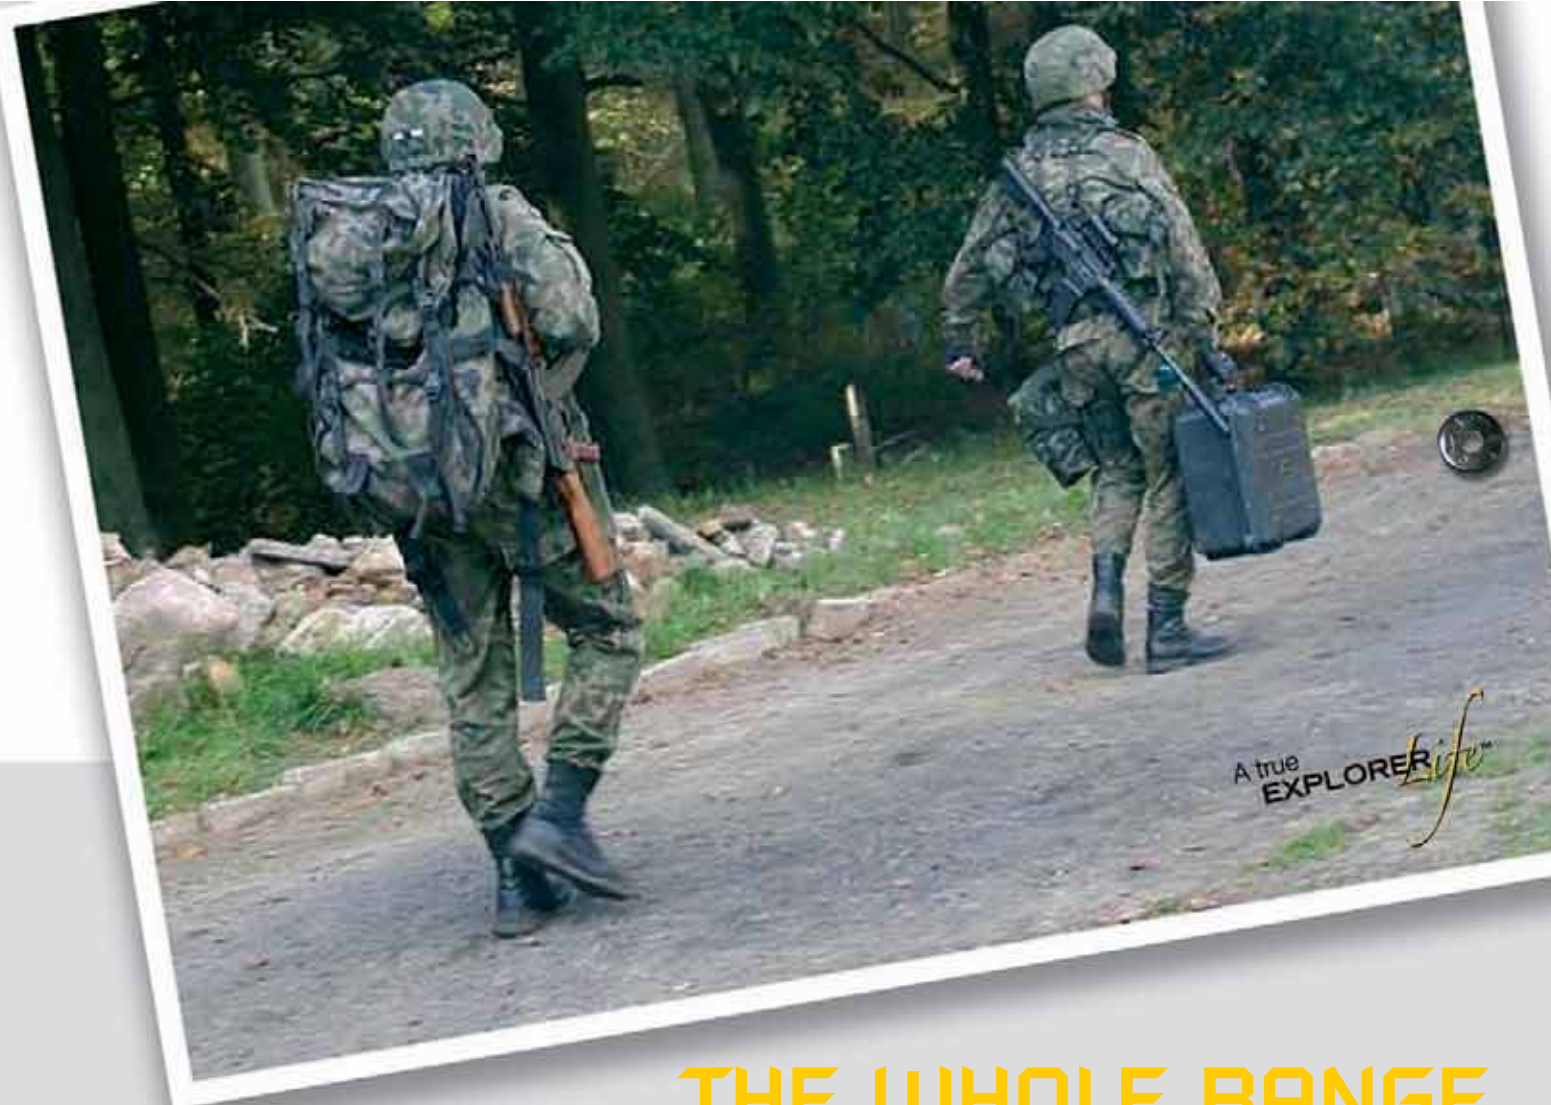

A true EXPLORER Life

## THE WHOLE RANGE

The Explorer Cases are available in several different sizes with three standard colours and two standard configurations. Special colours are available on request from reasonable quantity. It is possible to personalize the interiors into various configurations; the clean internal lines provide the ideal case for foam converters and custom foam fitting and the pre cubed foam allows the user to tailor the insert to their own individual requirement. In addition the cases are moulded with location points offering the easy insertion of special supports for panel mounting, panel rings, to easily create your customized solution.





# MAIN FIELDS of APPLICATION



SUBSEA, NAUTICAL & MARINE



FIRE & RESCUE  
EMERGENCY  
MEDICAL



PHOTOGRAPHIC, TV  
& BROADCASTING



MANUFACTURING  
INDUSTRY



OFFSHORE INDUSTRY



MILITARY & POLICE



LAW ENFORCEMENT  
& SAFETY



OUTDOOR

# MULTIPURPOSE BAGS

A complete set of removable padded bags with handles, internal adjustable dividers and practical lid panels with pouches available in most of the models. They protect and transport any kind of sensitive equipment and thanks to their modularity, they can be easily combined according to the table below.




PANEXPL27




PANEXPL33




PANEXPL38



PANEXPL44




PANEXPL48




PANEXPL51




PANEXPL58




BAG-R




BAG-S




BAG-T




BAG-E




BAG-PC44




BAG-A




BAG-F




BAG-PC48




BAG-B




BAG-G



DIV-H




DIV-I



BAG-L



BAG-M




DIV-N




BAG-O



BAG-P



DIV-Q

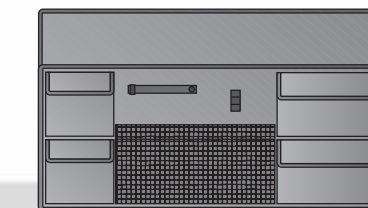

PANEXPL76

| CASE  | PANELS    | BAGS AND DIVIDERS |      |   |   |
|-------|-----------|-------------------|------|---|---|
| 2712  | PANEXPL27 | R                 |      |   |   |
| 2717  | PANEXPL27 | S                 |      |   |   |
| 3317  | PANEXPL33 | T                 |      |   |   |
| 3818  | PANEXPL38 | E                 |      |   |   |
| 4412  | PANEXPL44 | PC44              |      |   |   |
| 4419  | PANEXPL44 | A                 |      |   |   |
| 4820  | PANEXPL48 | F                 | PC48 |   |   |
| 5117  | PANEXPL51 | B                 |      |   |   |
| 5122  | PANEXPL51 | B                 |      |   |   |
| 5822  | PANEXPL58 | G                 | G    |   |   |
| 5833  | PANEXPL58 | G                 | G    | H | H |
| 7630  | PANEXPL76 | L                 | L    | M | N |
| 7641  | PANEXPL76 | O                 | O    | P | Q |
| 13513 | /         |                   |      |   |   |

# ACCESSORIES and SPARE PARTS

For more information on accessories and spare parts, please visit [www.exploreercases.com](http://www.exploreercases.com)



SEALING O-RING  
(Art. NEOSEAL + item nr.)



JAM FREE LATCHES  
WITH USER-FRIENDLY  
LEVERAGE OPENING  
MECHANISM  
(from 3818 to 13513 mod.)



PVC WATERPROOF I.D.  
LABEL  
(Art. LABELCOVER + item nr.)



ALL CASES ARE PROVIDED WITH INTERNAL SLOTS FOR OPTIONAL "PANEL MOUNTING BRACKETS" OR "PANEL MOUNTING RINGS". PLASTIC SUPPORT (Art. KIT SUPP.PLAST.), METAL SUPPORT (Art. KIT SUPP.EXPL.), PANEL RINGS (Art. PANRING27, PANRING33, PANRING38)




MANUAL PRESSURE  
RELEASE VALVE ALLOWS  
EFFICIENT PURGING EVEN  
IN DUSTY ENVIRONMENTS.  
THE INTERNAL STOP RING  
PREVENTS VALVE FROM  
BEING EXTRACTED  
COMPLETELY  
(Art. PURGEVALVE.B)



CERTAIN MODELS ALLOW  
AN OPTIONAL SHOULDER  
STRAP KIT TO BE MOUNTED.  
AVAILABLE FOR MODELS  
1908, 1913, 2209, 2214,  
4412, 4419, 5117  
(Art. SHOULDERKIT.U) and  
FOR MODELS 11413, 13513  
(Art. SHOULDERKIT.135)



BY RELEASING THE SCREW  
LID BECOMES SET TO  
SLIDE-OFF WHEN  
OPENED AT 70°



RELEASING SCREW DETAIL.  
AVAILABLE ON MODELS  
2712, 2717, 3317, 4412,  
4419, 5117, 5122



PATENTED COMBINATION  
PADLOCK  
(Art. EXPL COMBILOCK)



PATENTED HEAVY DUTY  
BRASS PADLOCK  
(Art. EXPL PADLOCK)



THE two Patented heavy duty brass padlocks are designed to fit snug to the Explorer case mould so as not to swing out and making it invulnerable from impacts and impossible for thieves to cut.

# BACKPACK CARRYING SYSTEM

Handy backpack carrying system made from robust tear-resistant fabric and designed with comfortable padded shoulder straps that leave your hands free. Available in two adjustable sizes (M & L) that fit models 3317 to 4820.

