

STANDARD RECOVERY DIODES

Stud Version

Features

- High surge current capability
- Designed for a wide range of applications
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600V V_{RRM}

70 A

Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls

Major Ratings and Characteristics

Parameters	70HF(R)		Units
	10 to 120	140 to 160	
$I_{F(AV)}$	70	70	A
@ T_C	140	110	°C
$I_{F(RMS)}$	110		A
I_{FSM} @ 50Hz	1200		A
@ 60Hz	1250		A
I^2t @ 50Hz	7100		A ² s
@ 60Hz	6540		A ² s
V_{RRM} range	100 to 1200	1400 to 1600	V
T_J range	- 65 to 180	- 65 to 150	°C



case style
DO-203AB (DO-5)

70HF(R) Series

Bulletin I20202 rev. A 05/98

International
IOR Rectifier

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{RRM} , maximum repetitive peak reverse voltage V	V_{RSM} , maximum non-repetitive peak reverse voltage V	$V_{R(BR)}$, minimum avalanche voltage V (1)	I_{RRM} max. @ $T_J = T_J$ max. mA
70HF(R)	10	100	200	--	15
	20	200	300	--	
	40	400	500	500	
	60	600	720	725	9
	80	800	960	950	
	100	1000	1200	1150	
	120	1200	1440	1350	
	140	1400	1650	1550	4.5
	160	1600	1900	1750	

(1) Avalanche version only available from V_{RRM} 400V to 1600V.

Forward Conduction

Parameter		70HF(R)		Units	Conditions		
		10 to 120	140 to 160				
$I_{F(AV)}$	Max. average forward current @ Case temperature	70	70	A	180° conduction, half sine wave		
		140	110	°C			
$I_{F(RMS)}$	Max. RMS forward current	110		A	DC @ $T_C = 25^{\circ}\text{C}$		
P_R	Maximum non-repetitive peak reverse power	20		K · W	10μs square pulse, $T_J = T_J$ max. see note (2)		
I_{FSM}	Max. peak, one-cycle forward, non-repetitive surge current	1200	A	t = 10ms	No voltage	Sinusoidal half wave, Initial $T_J = T_J$ max.	
		1250		t = 8.3ms	reapplied		
		1000		t = 10ms	100% V_{RRM}		
		1050		t = 8.3ms	reapplied		
I^2t	Maximum I^2t for fusing	7100	A^2s	t = 10ms	No voltage		Initial $T_J = T_J$ max.
		6450		t = 8.3ms	reapplied		
		5000		t = 10ms	100% V_{RRM}		
		4550		t = 8.3ms	reapplied		
$I^2\sqrt{t}$	Maximum $I^2\sqrt{t}$ for fusing	71000		$A^2\sqrt{s}$	t = 0.1 to 10ms, no voltage reapplied		
$V_{F(TO)1}$	Low level value of threshold voltage	0.79		V	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max.		
$V_{F(TO)2}$	High level value of threshold voltage	1.00			$(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max.		
r_{f1}	Low level value of forward slope resistance	2.33		mΩ	$(16.7\% \times \pi \times I_{F(AV)} < I < \pi \times I_{F(AV)})$, $T_J = T_J$ max.		
r_{f2}	High level value of forward slope resistance	1.53			$(I > \pi \times I_{F(AV)})$, $T_J = T_J$ max.		
V_{FM}	Max. forward voltage drop	1.35		V	$I_{pk} = 220A$, $T_J = 25^{\circ}\text{C}$, $t_D = 10\text{ms}$ sinusoidal wave		

(2) Available only for Avalanche version, all other parameters the same as 70HF.

Thermal and Mechanical Specifications

Parameter		70HF(R)		Units	Conditions
		10 to 120	140 to 160		
T _J	Max. junction operating temperature range	-65 to 180	-65 to 150	°C	
T _{stg}	Max. storage temperature range	-65 to 180	-65 to 150		
R _{thJC}	Max. thermal resistance, junction to case	0.45		K/W	DC operation
R _{thCS}	Max. thermal resistance, case to heatsink	0.25			Mounting surface, smooth, flat and greased
T	Max. allowed mounting torque ±10%	2.3 - 3.4		Nm	Not lubricated threads
		20 - 30		lbf·in	
wt	Approximate weight	17 (0.6)		g (oz)	
Case style		DO-203AB (DO5)			See Outline Table

ΔR_{thJC} Conduction

(The following table shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.08	0.06	K/W	T _J = T _J max.
120°	0.10	0.11		
90°	0.13	0.14		
60°	0.19	0.20		
30°	0.30	0.30		


Ordering Information Table

Device Code				
	70	HF	R	160 M
	①	②	③	④ ⑤
1	- 70 = Standard device 71 = Not isolated lead 72 = Isolated lead with silicone sleeve (Red = Reverse polarity) (Blue = Normal polarity)			
2	- HF = Standard diode HA = Avalanche diode			
3	- None = Stud Normal Polarity (Cathode to Stud) R = Stud Reverse Polarity (Anode to Stud)			
4	- Voltage code: Code x 10 = V _{RRM} (See Voltage Ratings table)			
5	- None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A M = Stud base DO-203AB (DO-5) M6 X 1 - (Not available for Avalanche diodes)			

70HF(R) Series

Bulletin I20202 rev. A 05/98

Outlines Table

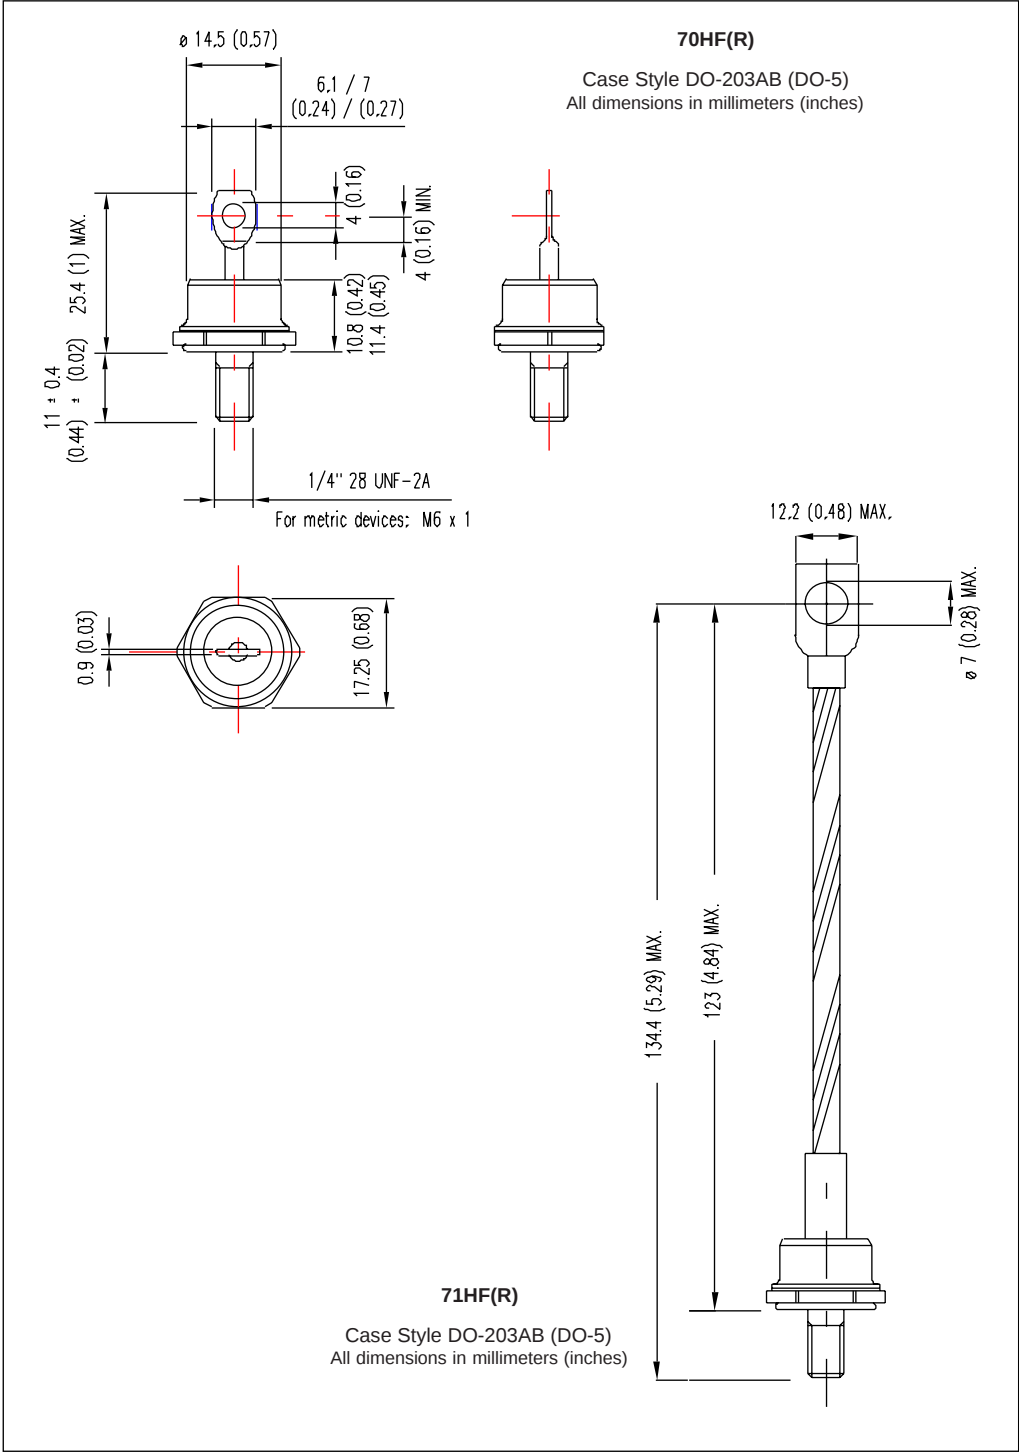

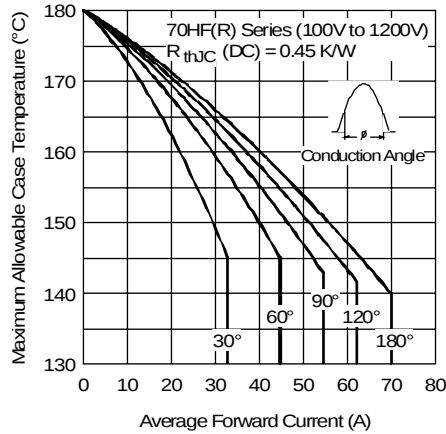


Fig. 1 - Current Ratings Characteristics

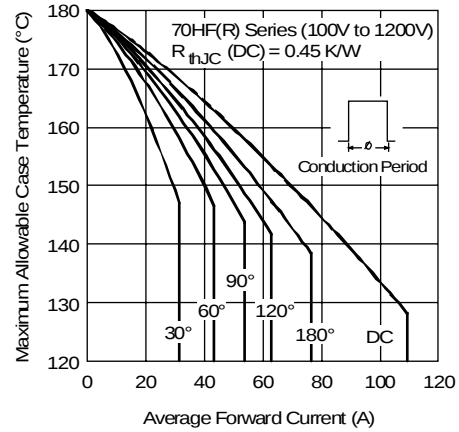


Fig. 2 - Current Ratings Characteristics

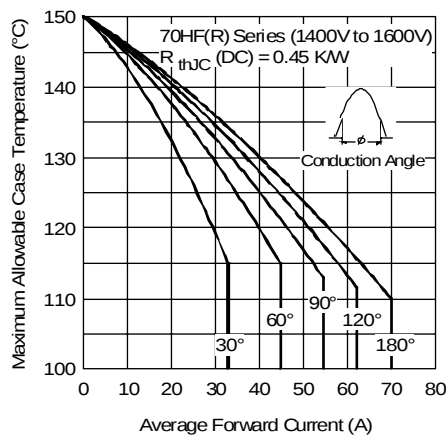


Fig. 3 - Current Ratings Characteristics

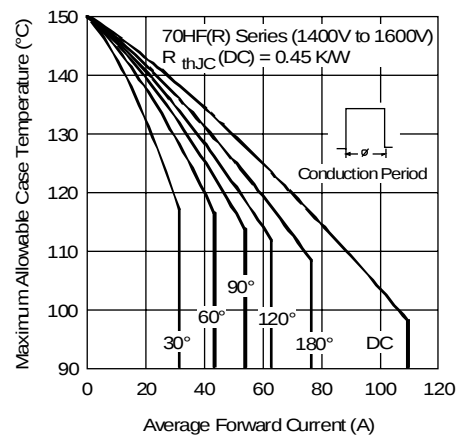


Fig. 4 - Current Ratings Characteristics

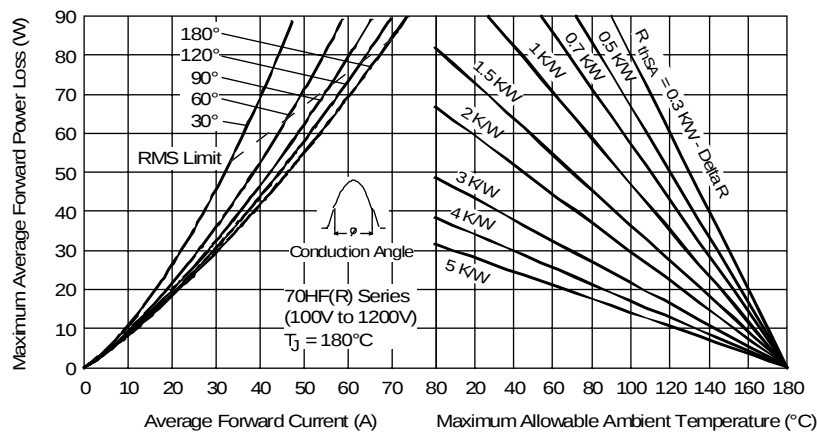


Fig. 5 - Forward Power Loss Characteristics

70HF(R) Series

Bulletin I20202 rev. A 05/98

International
IOR Rectifier

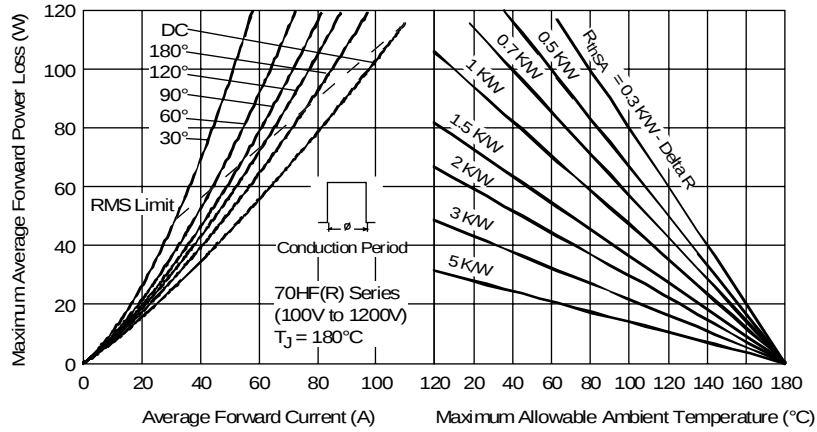


Fig. 6 - Forward Power Loss Characteristics

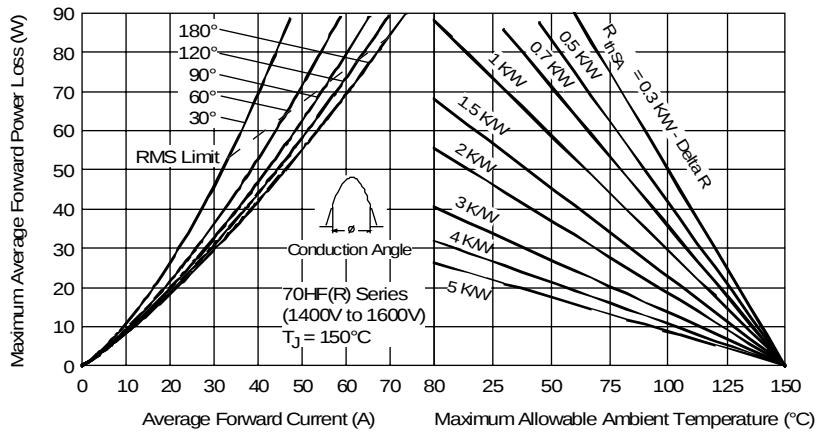


Fig. 7 - Forward Power Loss Characteristics

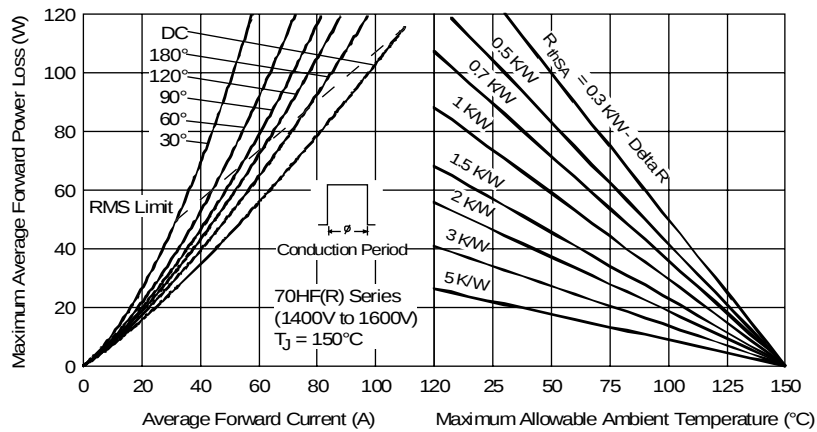


Fig. 8 - Forward Power Loss Characteristics

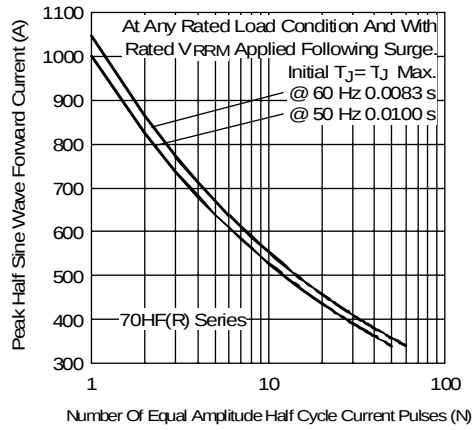


Fig. 9 - Maximum Non-Repetitive Surge Current

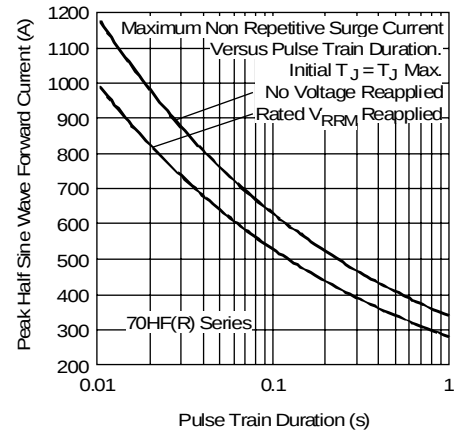


Fig. 10 - Maximum Non-Repetitive Surge Current

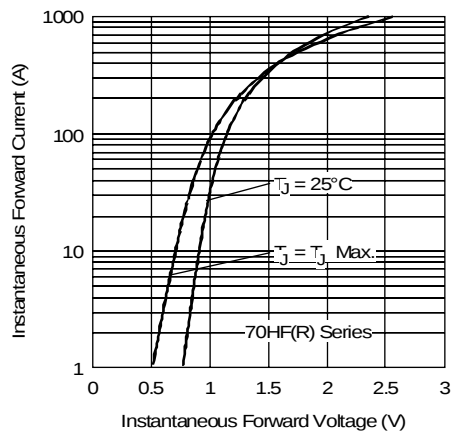


Fig. 11 - Forward Voltage Drop Characteristics

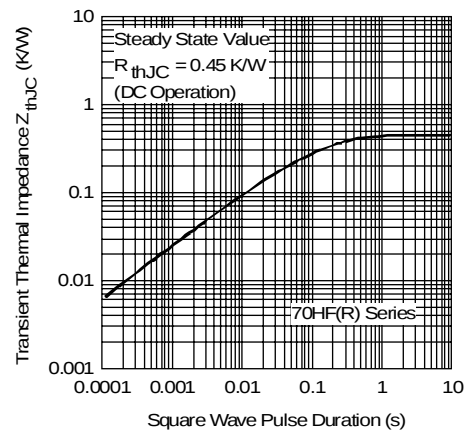


Fig. 12 - Thermal Impedance Z_{thJC} Characteristics