



COLOURDRIVER® XP

DMX CONTROLLABLE 4 CHANNEL LED DRIVER



OPERATING CONDITIONS

- ▲ Operating Ambient temperature -10°C to +50°C
- ▲ Storage Ambient temperature -40°C to +100°C
- ▲ Relative Humidity 5% - 85% (non-condensing)

See "Colourdriver XP operational instructions" document for complete programming & wiring information. See "XP-current settings" to set the maximum output current per channel (factory preset = 350mA) Documents provided with unit.

MECHANICAL SPECIFICATIONS

297mm X 198mm X 82mm
(11.69" x 7.80" x 3.23")
Weight 2.45 kg (5.4 lbs)
Input lead wire length 1m (39.37")
Mounting holes accommodate max size M5 (or #10) screws

MATERIALS

Aluminum case with light metallic grey polyester powder coat
Waterproof cable glands (4-10mm wire dia)

FEATURES / BENEFITS

- ▲ 4 independent channels for wider colour gamuts
- ▲ Individually settable max drive current for each channel up to 1000mA
- ▲ IP67 rated for wet environments
- ▲ Universal 90-264VAC, 50/60Hz input voltage
- ▲ Multi-stage thermal protection
- ▲ DMX 512 controllable
- ▲ Constant current output with 0-100% dimming in 255 steps
- ▲ 12VDC@ 100mA power source to run external apparatus such as cooling fan or pump
- ▲ Compliant to EN61000-3-2, EN55015, EN61000-4-4, EN61347-1, EN61346-2-22, EN61047 standards

APPLICATION

- ▲ Indoor & outdoor architectural lighting
- ▲ Entertainment lighting
- ▲ Theme lighting
- ▲ Bars & Nightclubs
- ▲ Signage

ELECTRICAL SPECIFICATIONS

- ▲ Input voltage 90-264VAC 50/60 Hz
- ▲ Total power consumption max 160W
- ▲ Input current 2.5A max, max inrush current 5A
- ▲ Max LEDs per channel based on max output current setting: (#'s based on LED Vf = 4.1 max):
 - 350mA - 12 LEDs
 - 500mA - 11 LEDs
 - 700mA - 10 LEDs
 - 1000mA - 6 LEDs
- ▲ Max output power 34W per channel
- ▲ Output voltage 10-50VDC per channel
- ▲ Controlled by DMX512 input signal, or use dip switches to select 1 of 38 pre-programmed shows
- ▲ Up to 32 Colourdriver XP units can be linked on one DMX signal

Dialight reserves the right to make changes at any time
in order to supply the best product possible.

Dialight-Lumidrives Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH
Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com




Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA
Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEXLUMCDXP_A

DRIVER LAYOUT

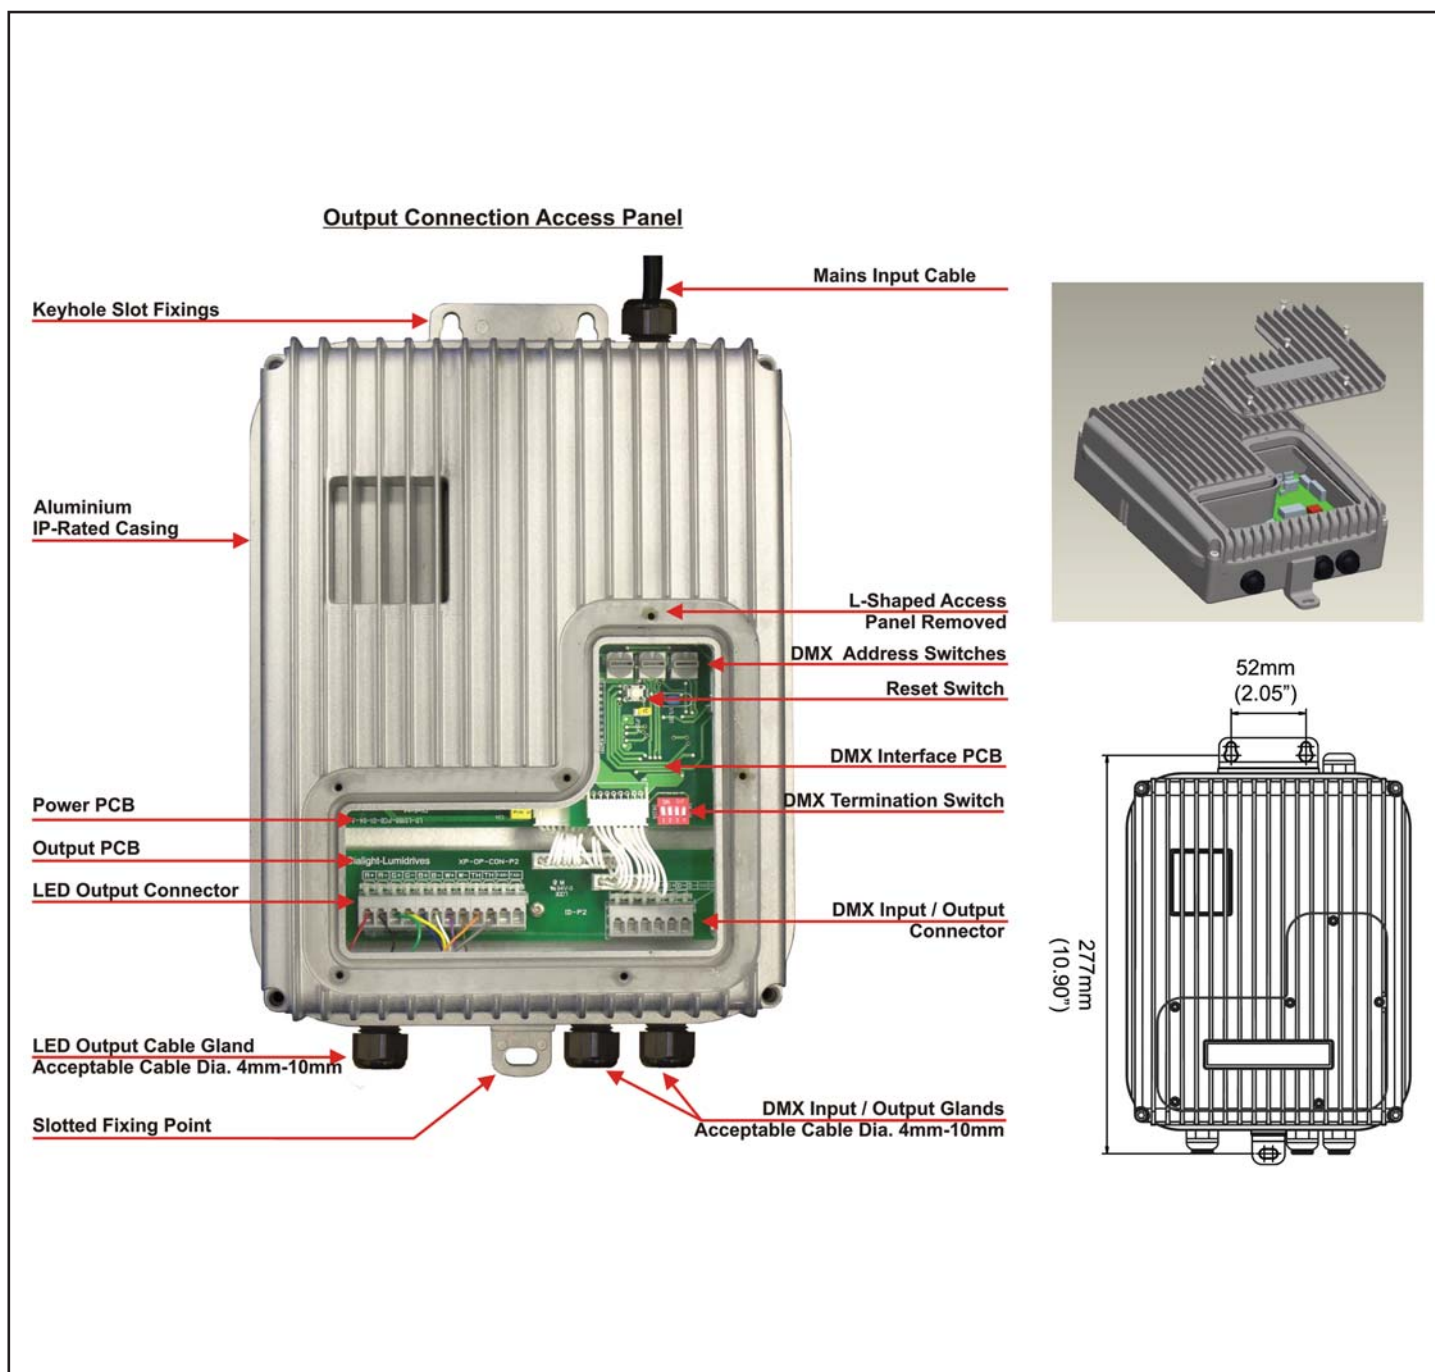

Note: The min/max wires that the quick connect terminals can accept are wire gauge:
 Min = 0.08mm² (0.32mm dia.) Max = 2.5mm² (1.8mm dia.)

PART NUMBER

CDU-XP-DMX-CON-IP

Dialight reserves the right to make changes at any time
 in order to supply the best product possible.

Dialight-Lumidrive Ltd.

York House • Wetherby Road • Long Marston, York, YO26 7NH

Tel: +44(0) 1904 739150 • Fax: +44(0) 1904 737926 • www.dialight.com



Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778 • www.dialight.com



MDEXLUMCDXP_A