


- 1. RECOMMENDED SPARE PARTS.
- 2. GREASE RAM, CAM, CAM FOLLOWER AND FEED ROD LIGHTLY.
- 3. LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.
- 4. CUT TO LENGTH AT ASSEMBLY.

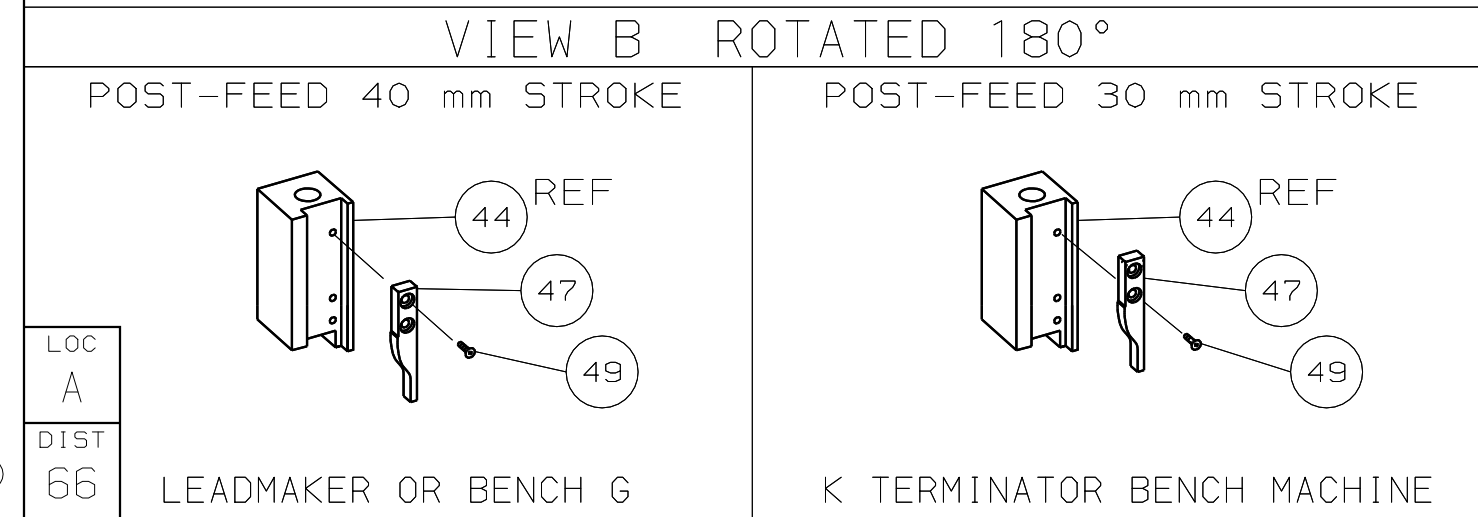

		-77-71		-1		PART NO		DESCRIPTION		ITEM NO	
						← REVISION OF EACH ASSY NO (WHEN BLANK, USE DWG REVISION)					
QTY REQD PER ASSY						PARTS LIST					
		DIMENSIONS: mm [INCHES]		MATERIAL		HT TR		FIN			
		DO NOT SCALE PRINT.									
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DR		06N0V02		APP		06N0V02	
		1 PLC DEC ±		DR		L.OFHOUSE		F.BACKHURST			
		2 PLC DEC ±		CHK		-		REL		113-02	
		3 PLC DEC ±								MULTIFORD	
		ANGLES ±		NAME		END FEED		HD-I		APPLICATOR	
		SURF TEXTURE: ✓								MACHINE REF	
		REMOVE BURRS, BREAK		SCALE		-		DWG NO		1336882	
		SHARP EDGES RO.38 MAX				D				SHEET	
										REV	
										A1	
MC JAN06		DECO2		CAGE CODE		00779		CUSTOMER AND ASSEMBLY DRAWING		RESTRICTED TO	
APP DATE										-	