

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

MAR ,1993.



© COPYRIGHT 1993 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC
J




DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	01	REVISED PER ECO-10-000444	19JAN10	KK	HMR

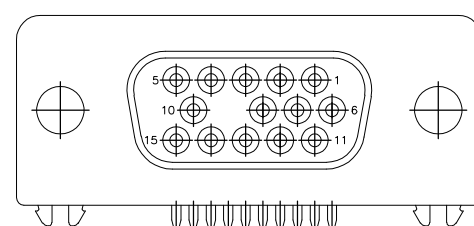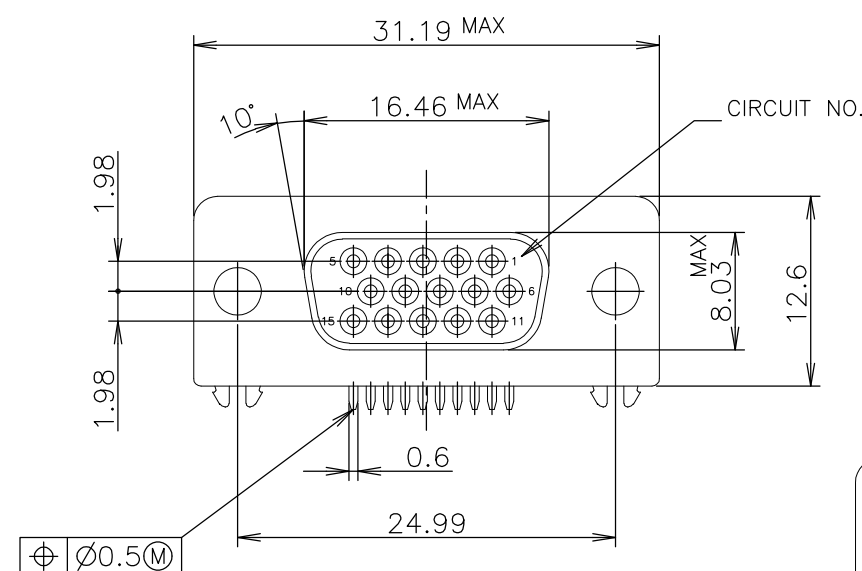

(3-5177802-3 ONLY)

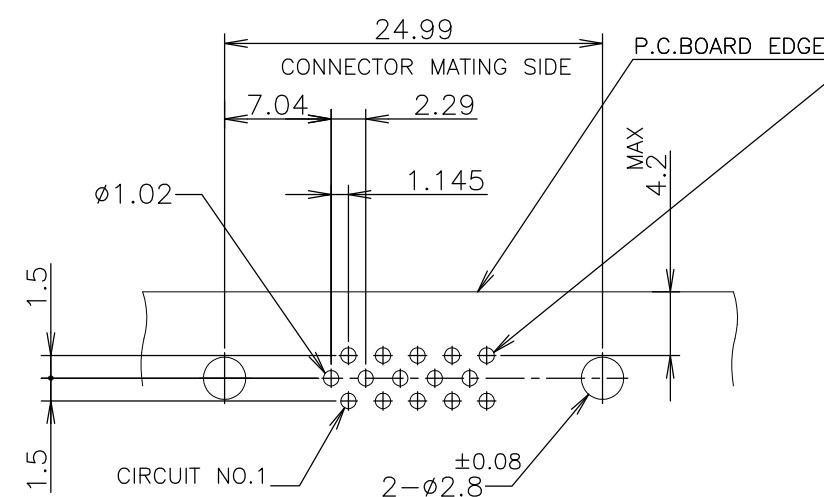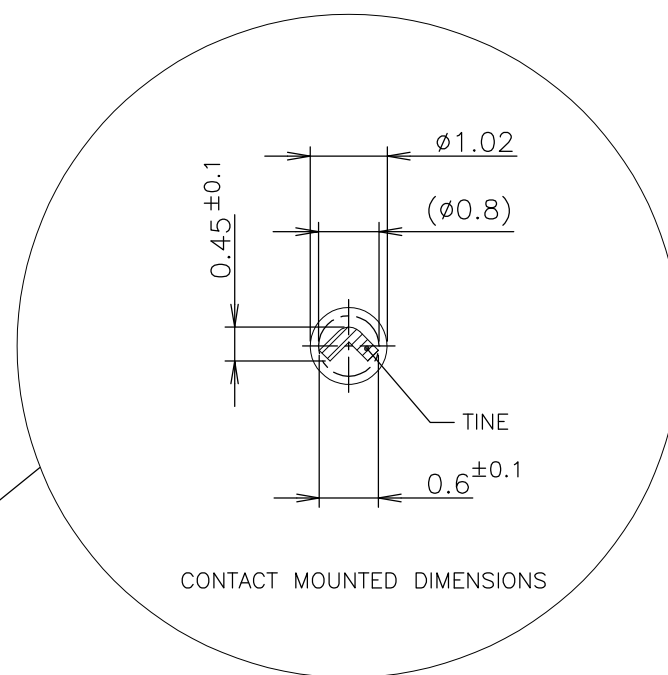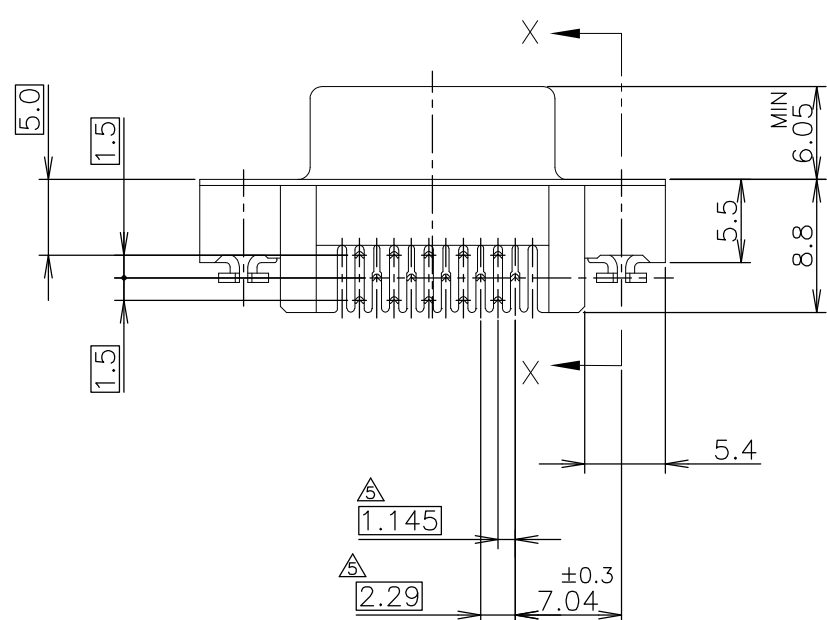

P. C. BOARD MOUNTING DIMENSIONS (±0.1)
THK=0.8~1.6

GENERAL TOLERANCE

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±
	1 PLC ±
	2 PLC ±
	3 PLC ±
	4 PLC ±
	ANGLES ±
	FINISH ±
MATERIAL	SEE NOTE 2

DWN	LEO ZHOU	5APR05
CHK	STEVEN YAO	5APR05
APVD	I.ENOMOTO	5APR05
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		

Tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan	
NAME			
RECEPTACLE ASSY RIGHT ANGLE SIZE 1, 15P LOW PROFILE STD-D P.C.B t=0.8~1.6 DIP AMPLIMITE III-J ULTRA SLIM HD-22			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-5177802	
SCALE		SHEET	REV
NTS		1 OF 1	01

1 THESE PRODUCTS CONFORM AMP SPEC 108-5401.


△ MATERIAL
HOUSING: THERMOPLASTEC
SHELL: CARBON STEEL
CONTACT: COPPER ALLOY
RETENTION LEG: COPPER ALLOY

△ FINISH
CONTACT: GOLD PL.
SHELL: TIN PL.
RETENTION LEG: TIN PL.

4 SCREWLOCK OR SCREW MUST BE ASSEMBLED
BEFORE PLUG CONNECTOR MATING.
(SCREW ON TORQUE: 5kg-cmMAX)

△ P. C. BOARD MOUNTING DIMENSION CONFORM
MIL SPEC. (MS-18273)

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

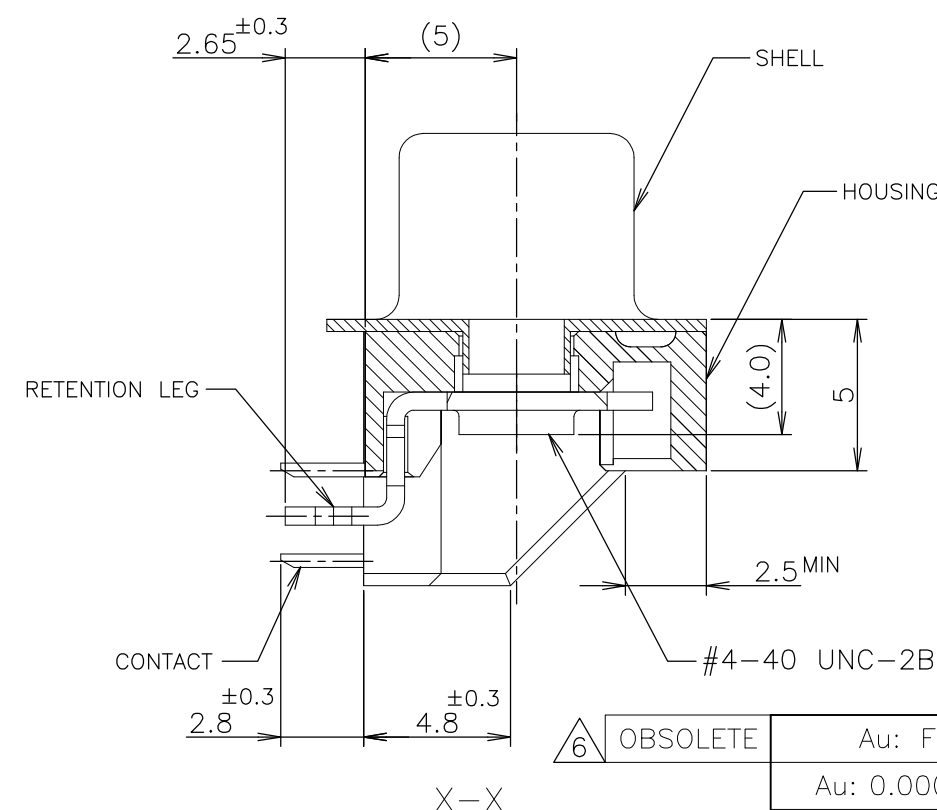

6	OBSOLETE	Au: FLASH	3=	-3
		Au: 0.00076 MIN.		-9
		Au: FLASH		5177802-3
		FINISH		P/N