

## Install in 22-dia. or 25-dia. Panel Cutout (When Using a Ring)



- Lever for easily mounting and removing the Switch Unit.
- Increase wiring efficiency with three-row mounting of Switch Blocks.
- Finger protection mechanism on Switch Unit provided as a standard feature.
- Use 25-dia. ring to install in 25-dia. panel cutouts.
- Mounted using either open-type (fork-type) or closed-type (round-type) crimp terminals.
- IP65 oil resistance (non-lighted models)  
IP65 (lighted models)



**!** Be sure to read *Safety Precautions for All Pushbutton Switches* and *Safety Precautions* on page 23.

### List of Models

#### Non-lighted Pushbutton Switches

	Appearance	Model number
Round	Flat	A22-F
	Projected	A22-T
	Full guard	A22-G
	Half guard	A22-H

#### Lighted Pushbutton Switches

	Appearance	Model number
Square	Projected	A22-C
	Guard	A22-D
	Mushroom Small (30 dia.)	A22-S
	Mushroom Medium (40 dia.)	A22-M
Round	Projected	A22L-T
	Full guard	A22L-G
	Half guard	A22L-H
	Projected	A22L-C
Square	Full guard	A22L-D

## Model Number Structure

**Model Number Legend** .... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch. For information on combinations, refer to *Ordering Information* on pages 3 to 6.

A 2 2 **L** - **T** **R** - **1 2 A** - **1 0** **M**

### (1) Type

Code	Description
No symbol	Non-lighted
L	Lighted

### (2) Flange Shape

Non-lighted

Code	Description	
F	Round	Flat
T		Projected
G		Full-guard
H		Half-guard
C	Square	Projected
D		Full-guard
S	Round	Mushroom Small (30 dia.)
M		Mushroom Medium (40 dia.)

### Lighted

Code	Description	
T	Round	Projection
G		Full-guard
H		Half-guard
C	Square	Projection
D		Full-guard

### (3) Illumination Color

Code	Description
R	Red
G	Green
Y	Yellow
W	White
A	Blue
B	Black*

\* For non-lighted type only

### (4) Light Source

Without Voltage Reduction Unit

Code	Operating Voltage	
No symbol	Non-lighted	
6D		
6A		
12A		
24A	24 VAC/VDC	
5	Incandescent lamp	5 VAC/VDC
12		12 VAC/VDC
24		24 VAC/VDC

### With Voltage Reduction Unit

Code	Operating Voltage	
T1	LED	100 VAC
T2		200 VAC

Note: LED incorporates the 24-VAC/VDC type.

### (5) Contacts

Code	Description
10	SPST-NO
01	SPST-NC
11	SPST-NO + SPST-NC
20	DPST-NO
02	DPST-NC

Note: 1. The contact ratings are for standard loads. For microloads, select from the accessories on page 10.  
2. Refer to page 13 for contact ratings.

### (6) Switch Action






Code	Description
M	Momentary
A	Alternate

Note: 1. Momentary operation:  
Self-resetting  
2. Alternate operation:  
Self-holding  
The Socket Unit holds and the Operation Unit resets.

- Ratings and characteristics: See pages 13 to 14.
- Precautions for correct use: Refer to page 23.
- Dimensions: Refer to page 16.
- Accessories and tools: See pages 10 to 12.



## Ordering Information

**Completely Assembled**..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.  
**Non-lighted (Round Type)**

Appearance	Operation	Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color
		Set	Set	
Round/Flat type A22-F	SPST-NO	<b>A22-F□-10M</b>	<b>A22-F□-10A</b>	
	SPST-NC	<b>A22-F□-01M</b>	<b>A22-F□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-F□-11M</b>	<b>A22-F□-11A</b>	
	DPST-NO	<b>A22-F□-20M</b>	<b>A22-F□-20A</b>	
	DPST-NC	<b>A22-F□-02M</b>	<b>A22-F□-02A</b>	
Round/Projection type A22-T	SPST-NO	<b>A22-T□-10M</b>	<b>A22-T□-10A</b>	
	SPST-NC	<b>A22-T□-01M</b>	<b>A22-T□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-T□-11M</b>	<b>A22-T□-11A</b>	
	SPST-NO + SPST-NO	<b>A22-T□-20M</b>	<b>A22-T□-20A</b>	
	SPST-NC + SPST-NC	<b>A22-T□-02M</b>	<b>A22-T□-02A</b>	
Round/Full-guard type A22-G	SPST-NO	<b>A22-G□-10M</b>	<b>A22-G□-10A</b>	
	SPST-NC	<b>A22-G□-01M</b>	<b>A22-G□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-G□-11M</b>	<b>A22-G□-11A</b>	
	SPST-NO + SPST-NO	<b>A22-G□-20M</b>	<b>A22-G□-20A</b>	
	SPST-NC + SPST-NC	<b>A22-G□-02M</b>	<b>A22-G□-02A</b>	
Round/Half-guard type A22-H	SPST-NO	<b>A22-H□-10M</b>	<b>A22-H□-10A</b>	
	SPST-NC	<b>A22-H□-01M</b>	<b>A22-H□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-H□-11M</b>	<b>A22-H□-11A</b>	
	SPST-NO + SPST-NO	<b>A22-H□-20M</b>	<b>A22-H□-20A</b>	
	SPST-NC + SPST-NC	<b>A22-H□-02M</b>	<b>A22-H□-02A</b>	
Round/Small-size Mushroom type (30-dia. head) A22-S	SPST-NO	<b>A22-S□-10M</b>		
	SPST-NC	<b>A22-S□-01M</b>		
	SPST-NO + SPST-NC	<b>A22-S□-11M</b>		
	SPST-NO + SPST-NO	<b>A22-S□-20M</b>		
	SPST-NC + SPST-NC	<b>A22-S□-02M</b>		
Round/Medium-size Mushroom type (40-dia head) A22-M	SPST-NO	<b>A22-M□-10M</b>		
	SPST-NC	<b>A22-M□-01M</b>		
	SPST-NO + SPST-NC	<b>A22-M□-11M</b>		
	SPST-NO + SPST-NO	<b>A22-M□-20M</b>		
	SPST-NC + SPST-NC	<b>A22-M□-02M</b>		

Note: The contact ratings are for standard loads.

### Non-lighted (Square Type)

Appearance	Operation	Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color
		Set	Set	
Square/Projection type A22-C	SPST-NO	<b>A22-C□-10M</b>	<b>A22-C□-10A</b>	
	SPST-NC	<b>A22-C□-01M</b>	<b>A22-C□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-C□-11M</b>	<b>A22-C□-11A</b>	
	SPST-NO + SPST-NO	<b>A22-C□-20M</b>	<b>A22-C□-20A</b>	
	SPST-NC + SPST-NC	<b>A22-C□-02M</b>	<b>A22-C□-02A</b>	
Square/Guard type A22-D	SPST-NO	<b>A22-D□-10M</b>	<b>A22-D□-10A</b>	
	SPST-NC	<b>A22-D□-01M</b>	<b>A22-D□-01A</b>	
	SPST-NO + SPST-NC	<b>A22-D□-11M</b>	<b>A22-D□-11A</b>	
	SPST-NO + SPST-NO	<b>A22-D□-20M</b>	<b>A22-D□-20A</b>	
	SPST-NC + SPST-NC	<b>A22-D□-02M</b>	<b>A22-D□-02A</b>	

Note: The contact ratings are for standard loads.

Individual models: Refer to pages 7 to 9.

(The Pushbutton, Lamp, and Switch can be ordered

■ Ratings and characteristics: See pages 13 to 14. ■ Dimensions: Refer to page 16.

■ Accessories and tools: See pages 10 to 12.

## Ordering Information

**Completely Assembled** ..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.  
**Lighted (Round Type)**

Appearance	Output	Lighting	Operating voltage	Operation		Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color	
				Set	Set				
Round/Projection type LED lighting (without Voltage Reduction Unit) A22L-T	SPST-NO	LED	6 VDC	A22L-T□-6D-10M	A22L-T□-6D-10A			R (red) Y (yellow) G (green) W (white) A (blue)	
			6 VAC	A22L-T□-6A-10M	A22L-T□-6A-10A				
			12 VAC/VDC	A22L-T□-12A-10M	A22L-T□-12A-10A				
			24 VAC/VDC	A22L-T□-24A-10M	A22L-T□-24A-10A				
			6 VDC	A22L-T□-6D-01M	A22L-T□-6D-01A				
	SPST-NC		6 VAC	A22L-T□-6A-01M	A22L-T□-6A-01A				
			12 VAC/VDC	A22L-T□-12A-01M	A22L-T□-12A-01A				
			24 VAC/VDC	A22L-T□-24A-01M	A22L-T□-24A-01A				
			6 VDC	A22L-T□-6D-11M	A22L-T□-6D-11A				
			6 VAC	A22L-T□-6A-11M	A22L-T□-6A-11A				
Round/Projection type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-T	SPST-NO + SPST-NC		12 VAC/VDC	A22L-T□-12A-11M	A22L-T□-12A-11A				
			24 VAC/VDC	A22L-T□-24A-11M	A22L-T□-24A-11A				
			6 VDC	A22L-T□-6D-20M	A22L-T□-6D-20A				
			6 VAC	A22L-T□-6A-20M	A22L-T□-6A-20A				
			12 VAC/VDC	A22L-T□-12A-20M	A22L-T□-12A-20A				
	SPST-NO + SPST-NO		24 VAC/VDC	A22L-T□-24A-20M	A22L-T□-24A-20A				
			6 VDC	A22L-T□-6D-02M	A22L-T□-6D-02A				
			6 VAC	A22L-T□-6A-02M	A22L-T□-6A-02A				
			12 VAC/VDC	A22L-T□-12A-02M	A22L-T□-12A-02A				
			24 VAC/VDC	A22L-T□-24A-02M	A22L-T□-24A-02A				
Round/Projection type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-T	SPST-NO		100 VAC	A22L-T□-T1-10M	A22L-T□-T1-10A				
			200 VAC	A22L-T□-T2-10M	A22L-T□-T2-10A				
			100 VAC	A22L-T□-T1-01M	A22L-T□-T1-01A				
			200 VAC	A22L-T□-T2-01M	A22L-T□-T2-01A				
			100 VAC	A22L-T□-T1-11M	A22L-T□-T1-11A				
	SPST-NC		200 VAC	A22L-T□-T2-11M	A22L-T□-T2-11A				
			100 VAC	A22L-T□-T1-20M	A22L-T□-T1-20A				
			200 VAC	A22L-T□-T2-20M	A22L-T□-T2-20A				
			100 VAC	A22L-T□-T1-02M	A22L-T□-T1-02A				
			200 VAC	A22L-T□-T2-02M	A22L-T□-T2-02A				

Note: The contact ratings are for standard loads.

Appearance	Output	Lighting	Operating voltage	Operation		Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color		
				Set	Set					
Round/Half-guard type LED lighting (without Voltage Reduction Unit) A22L-H	SPST-NO	LED	24 VAC/VDC	A22L-H□-24A-10M	A22L-H□-24A-10A			R (red) Y (yellow) G (green) W (white) A (blue)		
				A22L-H□-24A-01M	A22L-H□-24A-01A					
				A22L-H□-24A-11M	A22L-H□-24A-11A					
				A22L-H□-24A-20M	A22L-H□-24A-20A					
				A22L-H□-24A-02M	A22L-H□-24A-02A					
	SPST-NC			100 VAC	A22L-H□-T1-10M	A22L-H□-T1-10A				
				200 VAC	A22L-H□-T2-10M	A22L-H□-T2-10A				
				100 VAC	A22L-H□-T1-01M	A22L-H□-T1-01A				
				200 VAC	A22L-H□-T2-01M	A22L-H□-T2-01A				
				100 VAC	A22L-H□-T1-11M	A22L-H□-T1-11A				
Round/Half-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-H	SPST-NO			200 VAC	A22L-H□-T2-11M	A22L-H□-T2-11A				
				100 VAC	A22L-H□-T1-20M	A22L-H□-T1-20A				
				200 VAC	A22L-H□-T2-20M	A22L-H□-T2-20A				
				100 VAC	A22L-H□-T1-02M	A22L-H□-T1-02A				
				200 VAC	A22L-H□-T2-02M	A22L-H□-T2-02A				

Note: The contact ratings are for standard loads.

Individual models: Refer to pages 7 to 9.  
 (The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Ratings, characteristics, and dimensions: See pages 13 to 16.  
 ■ Accessories and tools: See pages 10 to 12.

## Ordering Information

**Completely Assembled**..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.  
**Lighted (Round Type)**

Appearance	Output	Lighting	Operating voltage	Operation	Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color	
					Set	Set		
Round/Full-guard type LED lighting (without Voltage Reduction Unit) A22L-G	SPST-NO	LED	6 VDC	A22L-G□-6D-10M	A22L-G□-6D-10A	A22L-G□-6D-10A	R (red) Y (yellow) G (green) W (white) A (blue)	
			6 VAC	A22L-G□-6A-10M	A22L-G□-6A-10A	A22L-G□-6A-10A		
			12 VAC/VDC	A22L-G□-12A-10M	A22L-G□-12A-10A	A22L-G□-12A-10A		
			24 VAC/VDC	A22L-G□-24A-10M	A22L-G□-24A-10A	A22L-G□-24A-10A		
			6 VDC	A22L-G□-6D-01M	A22L-G□-6D-01A	A22L-G□-6D-01A		
	SPST-NC		6 VAC	A22L-G□-6A-01M	A22L-G□-6A-01A	A22L-G□-6A-01A		
			12 VAC/VDC	A22L-G□-12A-01M	A22L-G□-12A-01A	A22L-G□-12A-01A		
			24 VAC/VDC	A22L-G□-24A-01M	A22L-G□-24A-01A	A22L-G□-24A-01A		
			6 VDC	A22L-G□-6D-11M	A22L-G□-6D-11A	A22L-G□-6D-11A		
			6 VAC	A22L-G□-6A-11M	A22L-G□-6A-11A	A22L-G□-6A-11A		
Round/Full-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-G	SPST-NO + SPST-NC		12 VAC/VDC	A22L-G□-12A-11M	A22L-G□-12A-11A	A22L-G□-12A-11A		
			24 VAC/VDC	A22L-G□-24A-11M	A22L-G□-24A-11A	A22L-G□-24A-11A		
			6 VDC	A22L-G□-6D-20M	A22L-G□-6D-20A	A22L-G□-6D-20A		
			6 VAC	A22L-G□-6A-20M	A22L-G□-6A-20A	A22L-G□-6A-20A		
			12 VAC/VDC	A22L-G□-12A-20M	A22L-G□-12A-20A	A22L-G□-12A-20A		
	SPST-NO + SPST-NO		24 VAC/VDC	A22L-G□-24A-20M	A22L-G□-24A-20A	A22L-G□-24A-20A		
			6 VDC	A22L-G□-6D-02M	A22L-G□-6D-02A	A22L-G□-6D-02A		
			6 VAC	A22L-G□-6A-02M	A22L-G□-6A-02A	A22L-G□-6A-02A		
			12 VAC/VDC	A22L-G□-12A-02M	A22L-G□-12A-02A	A22L-G□-12A-02A		
			24 VAC/VDC	A22L-G□-24A-02M	A22L-G□-24A-02A	A22L-G□-24A-02A		
Round/Full-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-G	SPST-NO		100 VAC	A22L-G□-T1-10M	A22L-G□-T1-10A	A22L-G□-T1-10A		
			200 VAC	A22L-G□-T2-10M	A22L-G□-T2-10A	A22L-G□-T2-10A		
			100 VAC	A22L-G□-T1-01M	A22L-G□-T1-01A	A22L-G□-T1-01A		
			200 VAC	A22L-G□-T2-01M	A22L-G□-T2-01A	A22L-G□-T2-01A		
			100 VAC	A22L-G□-T1-11M	A22L-G□-T1-11A	A22L-G□-T1-11A		
	SPST-NC		200 VAC	A22L-G□-T2-11M	A22L-G□-T2-11A	A22L-G□-T2-11A		
			100 VAC	A22L-G□-T1-20M	A22L-G□-T1-20A	A22L-G□-T1-20A		
			200 VAC	A22L-G□-T2-20M	A22L-G□-T2-20A	A22L-G□-T2-20A		
			100 VAC	A22L-G□-T1-02M	A22L-G□-T1-02A	A22L-G□-T1-02A		
			200 VAC	A22L-G□-T2-02M	A22L-G□-T2-02A	A22L-G□-T2-02A		

Note: The contact ratings are for standard loads.

Individual models: Refer to pages 7 to 9.

(The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Ratings, characteristics, and dimensions: Refer to pages 13 to 16.

■ Accessories and tools: See pages 10 to 12.

## Ordering Information

**Completely Assembled** ..... Shipped as a set which includes the Pushbutton, Lamp (lighted type only), and Switch.  
**Lighted (Square Type)**

Appearance	Output	Lighting	Operating voltage	Operation		Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color
				Set	Set			
Square/Projection type LED lighting (without Voltage Reduction Unit) A22L-C	SPST-NO	LED	24 VAC/VDC	<b>A22L-C□-24A-10M</b>	<b>A22L-C□-24A-10A</b>			R (red) Y (yellow) G (green) W (white) A (blue)
	SPST-NC			<b>A22L-C□-24A-01M</b>	<b>A22L-C□-24A-01A</b>			
	SPST-NO + SPST-NC			<b>A22L-C□-24A-11M</b>	<b>A22L-C□-24A-11A</b>			
	SPST-NO + SPST-NO			<b>A22L-C□-24A-20M</b>	<b>A22L-C□-24A-20A</b>			
	SPST-NC + SPST-NC			<b>A22L-C□-24A-02M</b>	<b>A22L-C□-24A-02A</b>			
Square/Projection type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-C	100 VAC	LED	100 VAC 200 VAC	<b>A22L-C□-T1-10M</b>	<b>A22L-C□-T1-10A</b>			R (red) Y (yellow) G (green) W (white) A (blue)
	200 VAC			<b>A22L-C□-T2-10M</b>	<b>A22L-C□-T2-10A</b>			
	100 VAC			<b>A22L-C□-T1-01M</b>	<b>A22L-C□-T1-01A</b>			
	200 VAC			<b>A22L-C□-T2-01M</b>	<b>A22L-C□-T2-01A</b>			
	100 VAC			<b>A22L-C□-T1-11M</b>	<b>A22L-C□-T1-11A</b>			
	200 VAC			<b>A22L-C□-T2-11M</b>	<b>A22L-C□-T2-11A</b>			
	100 VAC			<b>A22L-C□-T1-20M</b>	<b>A22L-C□-T1-20A</b>			
	200 VAC			<b>A22L-C□-T2-20M</b>	<b>A22L-C□-T2-20A</b>			
	100 VAC			<b>A22L-C□-T1-02M</b>	<b>A22L-C□-T1-02A</b>			
	200 VAC			<b>A22L-C□-T2-02M</b>	<b>A22L-C□-T2-02A</b>			

Note: The contact ratings are for standard loads.

Appearance	Output	Lighting	Operating voltage	Operation		Momentary operation (self-resetting)	Alternate operation (self-holding)	Illumination color
				Set	Set			
Square/Full-guard type LED lighting (without Voltage Reduction Unit) A22L-D	SPST-NO	LED	24 VAC/VDC	<b>A22L-D□-24A-10M</b>	<b>A22L-D□-24A-10A</b>			R (red) Y (yellow) G (green) W (white) A (blue)
	SPST-NC			<b>A22L-D□-24A-01M</b>	<b>A22L-D□-24A-01A</b>			
	SPST-NO + SPST-NC			<b>A22L-D□-24A-11M</b>	<b>A22L-D□-24A-11A</b>			
	SPST-NO + SPST-NO			<b>A22L-D□-24A-20M</b>	<b>A22L-D□-24A-20A</b>			
	SPST-NC + SPST-NC			<b>A22L-D□-24A-02M</b>	<b>A22L-D□-24A-02A</b>			
Square/Full-guard type LED voltage-reduction lighting (with Voltage Reduction Unit) A22L-D	100 VAC	LED	100 VAC 200 VAC	<b>A22L-D□-T1-10M</b>	<b>A22L-D□-T1-10A</b>			R (red) Y (yellow) G (green) W (white) A (blue)
	200 VAC			<b>A22L-D□-T2-10M</b>	<b>A22L-D□-T2-10A</b>			
	100 VAC			<b>A22L-D□-T1-01M</b>	<b>A22L-D□-T1-01A</b>			
	200 VAC			<b>A22L-D□-T2-01M</b>	<b>A22L-D□-T2-01A</b>			
	100 VAC			<b>A22L-D□-T1-11M</b>	<b>A22L-D□-T1-11A</b>			
	200 VAC			<b>A22L-D□-T2-11M</b>	<b>A22L-D□-T2-11A</b>			
	100 VAC			<b>A22L-D□-T1-20M</b>	<b>A22L-D□-T1-20A</b>			
	200 VAC			<b>A22L-D□-T2-20M</b>	<b>A22L-D□-T2-20A</b>			
	100 VAC			<b>A22L-D□-T1-02M</b>	<b>A22L-D□-T1-02A</b>			
	200 VAC			<b>A22L-D□-T2-02M</b>	<b>A22L-D□-T2-02A</b>			

Note: The contact ratings are for standard loads.

Individual models: Refer to pages 7 to 9.  
 (The Pushbutton, Lamp, and Switch can be ordered separately.)

■ Ratings, characteristics, and dimensions: See pages 13 to 16.  
 ■ Accessories and tools: See pages 10 to 12.

## Ordering Information

**Subassembled** ..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

### Non-lighted Models

Pushbutton



### Lighted Models (without Voltage Reduction Unit)

Pushbutton




### Lighted Models (with Voltage Reduction Unit)


Pushbutton




Switch



Switch (without Voltage Reduction Unit)



Switch (with Voltage Reduction Unit)




Ordering set combinations: Refer to pages 3 to 6.



- Ratings, characteristics, and dimensions: See pages 13 to 16.
- Accessories and tools: See pages 10 to 12.

## Ordering Information

**Subassembled** ..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

### Pushbutton Non-lighted



Sealing	IP65 oil-resistant models			
	Flat type	Projection type	Full-guard type	Half-guard type
Appearance				
Color	Model	Model	Model	Model
Red	A22-FR	A22-TR	A22-GR	A22-HR
Green	A22-FG	A22-TG	A22-GG	A22-HG
Yellow	A22-FY	A22-TY	A22-GY	A22-HY
White	A22-FW	A22-TW	A22-GW	A22-HW
Blue	A22-FA	A22-TA	A22-GA	A22-HA
Black	A22-FB	A22-TB	A22-GB	A22-HB

Sealing	IP65 oil-resistant models			
	Round/Mushroom type (30-dia. head)	Round/Mushroom type (40-dia. head)	Square/Projection type	Square/Full-guard type
Appearance				
Color	Model	Model	Model	Model
Red	A22-SR	A22-MR	A22-CR	A22-DR
Green	A22-SG	A22-MG	A22-CG	A22-DG
Yellow	A22-SY	A22-MY	A22-CY	A22-DY
White	A22-SW	A22-MW	A22-CW	A22-DW
Blue	A22-SA	A22-MA	A22-CA	A22-DA
Black	A22-SB	A22-MB	A22-CB	A22-DB

### Lighted

Sealing	IP65		
	Projection type	Full-guard type	Half-guard type
Appearance			
Color	Model	Model	Model
Red	A22-TR	A22-GR	A22-HR
Green	A22-TG	A22-GG	A22-HG
Yellow	A22-TY	A22-GY	A22-HY
White	A22-TW	A22-GW	A22-HW
Blue	A22-TA	A22-GA	A22-HA

Note: Common to incandescent lamps and LED lamps.

Sealing	IP65	
	Square/Projection type	Square/Full-guard type
Appearance		
Color	Model	Model
Red	A22-CR	A22-DR
Green	A22-CG	A22-DG
Yellow	A22-CY	A22-DY
White	A22-CW	A22-DW
Blue	A22-CA	A22-DA

Ordering set combinations: Refer to pages 3 to 6.

- Ratings, characteristics, and dimensions: See pages 13 to 16.
- Accessories and tools: See pages 10 to 12.

## Ordering Information

**Subassembled** ..... The Pushbutton, Lamp, or Switch can be ordered separately. Use them in combination for models that are not available as assembled Units. These can also be used as inventory for maintenance parts.

### Lamp

#### LED Lamp

Appearance	Operating voltage	LED light	6 V	12 V	24 V	24 V Super-bright
			Model	Model	Model	Model
	DC	Red	<b>A22-6DR</b>	---	---	---
		Green	<b>A22-6DG</b>	---	---	---
		Yellow *2	<b>A22-6DY</b>	---	---	---
		Blue	<b>A22-6DA</b>	---	---	---
	AC	Red	<b>A22-6AR</b>	---	---	---
		Green	<b>A22-6AG</b>	---	---	---
		Yellow *2	<b>A22-6AY</b>	---	---	---
		Blue	<b>A22-6AA</b>	---	---	---
	AC and DC	Red	---	<b>A22-12AR</b>	<b>A22-24AR</b>	<b>A22-24ASR</b>
		Green	---	<b>A22-12AG</b>	<b>A22-24AG</b>	<b>A22-24ASG</b>
		Yellow *2	---	<b>A22-12AY</b>	<b>A22-24AY</b>	<b>A22-24ASY</b>
		Blue	---	<b>A22-12AA</b>	<b>A22-24AA</b>	<b>A22-24ASA</b>

\*1. For voltage-reduction lighting, use the A22-24A□. Only 24-V LED lamps can be used.

\*2. Used when the Pushbutton color is yellow or white.

### Incandescent Lamp

Appearance	Operating voltage	5 VAC/VDC	12 VAC/VDC	24 VAC/VDC
		A22-5	A22-12	A22-24

### Switch (Standard Load)

#### No Voltage Reduction Unit

Contacts	Classification	Non-lighted		Lighted	
		Appearance		Operation	
		Momentary	Alternate	Momentary	Alternate
Standard load	SPST-NO	<b>A22-10M</b>	<b>A22-10A</b>	<b>A22L-10M</b>	<b>A22L-10A</b>
	SPST-NC	<b>A22-01M</b>	<b>A22-01A</b>	<b>A22L-01M</b>	<b>A22L-01A</b>
	SPST-NO + SPST-NC	<b>A22-11M</b>	<b>A22-11A</b>	<b>A22L-11M</b>	<b>A22L-11A</b>
	SPST-NO + SPST-NO	<b>A22-20M</b>	<b>A22-20A</b>	<b>A22L-20M</b>	<b>A22L-20A</b>
	SPST-NC + SPST-NC	<b>A22-02M</b>	<b>A22-02A</b>	<b>A22L-02M</b>	<b>A22L-02A</b>

### Voltage Reduction Unit

Contacts	Classification	110 VAC, Lighted		220 VAC, Lighted	
		Appearance		Operation	
		Momentary	Alternate	Momentary	Alternate
Standard load	SPST-NO	<b>A22L-10M-T1</b>	<b>A22L-10A-T1</b>	<b>A22L-10M-T2</b>	<b>A22L-10A-T2</b>
	SPST-NC	<b>A22L-01M-T1</b>	<b>A22L-01A-T1</b>	<b>A22L-01M-T2</b>	<b>A22L-01A-T2</b>
	SPST-NO + SPST-NC	<b>A22L-11M-T1</b>	<b>A22L-11A-T1</b>	<b>A22L-11M-T2</b>	<b>A22L-11A-T2</b>
	SPST-NO + SPST-NO	<b>A22L-20M-T1</b>	<b>A22L-20A-T1</b>	<b>A22L-20M-T2</b>	<b>A22L-20A-T2</b>
	SPST-NC + SPST-NC	<b>A22L-02M-T1</b>	<b>A22L-02A-T1</b>	<b>A22L-02M-T2</b>	<b>A22L-02A-T2</b>

\*1. A DPST-NO model is shown here as an example.

\*2. For a model with a Voltage Reduction Unit, use the A22-24A□. Only 24-V LED lamps can be used.

Ordering set combinations: Refer to pages 3 to 6.

■ Ratings, characteristics, and dimensions: See pages 13 to 16.

■ Accessories and tools: See pages 10 to 12.

## Ordering Information

### Accessories (Order Separately)

#### Accessories



Item	Appearance	Classification		Model	Remarks	
Switch Blocks		SPST-NO	Standard load	<b>A22-10</b>	Order Switch Blocks to add an SPST-NO (A22-10) or SPST-NC (A22-01) Switch Block (for standard loads) or to replace a Switch Block.	
		SPST-NC	Standard load	<b>A22-10S</b>		
		SPST-NC	Standard load	<b>A22-01</b>		
		SPST-NC	Microload	<b>A22-01S</b>		
		DPST-NO	Standard load	<b>A22-20</b>		
		DPST-NO	Microload	<b>A22-20S</b>		
		DPST-NC	Standard load	<b>A22-02</b>		
		DPST-NC	Microload	<b>A22-02S</b>		
		SPST-NO + SPST-NC	Standard load	<b>A22-11</b>		
		SPST-NO + SPST-NC	Microload	<b>A22-11S</b>		
Lamp Sockets		Direct lighting		<b>A22-TN</b>		
		Voltage-reduction lighting	110 VAC	<b>A22-T1</b>	Used when changing the lighting method. (LED only)	
			220 VAC	<b>A22-T2</b>		
Mounting Latches		For momentary models		<b>A22-3200</b>	Provided as standard. Order Mounting Latches only when mounting Switch Blocks or Lamp Sockets that are purchased individually.	
		For alternate models		<b>A22-3210</b>		
Legend Plate Frames		With Snap-in Legend Plate (Without text)	White	<b>A22Z-3321</b>	Snap-in Legend Plate is acrylic.	
			Red	<b>A22Z-3322</b>		
			Black	<b>A22Z-3323</b>		
		Without Snap-in Legend Plate		<b>A22Z-3320</b>	Snap-in Legend Plate is acrylic.	
			White	<b>A22Z-3331</b>		
			Red	<b>A22Z-3332</b>		
			Black	<b>A22Z-3333</b>		
		Without Snap-in Legend Plate		<b>A22Z-3330</b>		
Lock Ring		Round		<b>A22Z-3360</b>	This Lock Ring is used when a more secure lock feature is required.	
Metallic Bezel Rings		For flat or projection models		<b>A22Z-3580</b>	Replace with the standard model. Material: nickel-plated zinc Cannot be used with the M22.	
		For full-guard models		<b>A22Z-3582</b>		
Sealing Caps		For flat models		<b>A22Z-3600F</b>	Used to prevent dust or water from entering the Operation Unit (Pushbutton, etc.). Color: opaque Material: silicon	
		For projection models		<b>A22Z-3600T</b>		
		For full-guard models		<b>A22Z-3600G</b>		
Color Caps			Red	<b>A22Z-30TR</b>	Used for changing the Pushbutton color of the (round) Pushbutton Switches. Cannot be used, however, with Half-guard Switches.	
			Green	<b>A22Z-30TG</b>		
			Yellow	<b>A22Z-30TY</b>		
			White	<b>A22Z-30TW</b>		
			Blue	<b>A22Z-30TA</b>		
Caps	For A22			<b>A22Z-3490</b>	Material: polycarbonate resin	
	For M22			<b>A22Z-3495</b>		
Three-throw Spacer				---	<b>A22Z-3003</b>	Used when mounting three Nonlighted Switches. Cannot be used with Alternate, Emergency Stop, Knob-type Selector, Key-type Selector, or Mushroom-type Switches. (See page 28.)
Hole Plug				Round	<b>A22Z-3530</b>	Can be plugged into pre-cut panel holes for future expansion. The color is black.
Control Boxes (Enclosures)			One hole	Exclusively for A22	<b>A22Z-B101</b>	For those designed exclusively for A22, DPST-NO or DPST-NC Switches cannot be used. A3T-compatible Control Boxes, A22-series alternate operation models, and DPST-NO, DPST-NC, and SPST-NO + SPST-NC contacts cannot be used. Material: Polycarbonate resin
			One hole	Compatible with A3T	<b>A22Z-B201</b>	
			One hole, yellow box (for emergency stop)	Exclusively for A22	<b>A22Z-B101Y</b>	
			One hole, yellow box (for emergency stop)	Compatible with A3T	<b>A22Z-B201Y</b>	
			Two holes	Exclusively for A22	<b>A22Z-B102</b>	
Connectors			Two holes	Compatible with A3T	<b>A22Z-B202</b>	
			Three holes	Exclusively for A22	<b>A22Z-B103</b>	
			Three holes	Compatible with A3T	<b>A22Z-B203</b>	
Connectors		Applicable cable diameter (mm)	7 to 9 dia.	<b>A22Z-3500-1</b>	Plastic connector used to extend a cable from the Switch Box. (See 9 to 11 dia. A22Z-3500-2 page 27.)	
			9 to 11 dia.	<b>A22Z-3500-2</b>		

## Ordering Information



Item	Appearance	Classification	Model	Remarks
25-dia. Ring		---	<b>A22Z-R25</b>	Use when mounting to a panel with a 25-dia. hole. For details, refer to page 18. Since this is not attached to the main body, order separately.
30-dia. Resin Attachment		Round	<b>A22Z-A30</b>	Use when mounting to a panel with a 30-dia. hole. For details, refer to page 20.
Lock Plate		---	<b>A22Z-3380</b>	Use to fix the lever on the Switch.
Simple Protective Cover		---	<b>A22Z-3700</b>	Prevents foreign matter entering into the Switch from the back of the panel.

- Ratings and characteristics: See pages 13 to 14. ■ Precautions for correct use: See page 23.
- Dimensions: See page 16. ■ Accessories and tools: See pages 10 to 12.

## Ordering Information

Item	Appearance	Classification	Model	Remarks	
Snap-in Legend Plates	  	Without text	Black	A22Z-3443B	
			Red	A22Z-3443R	
			White	A22Z-3443W	
			Transparent	A22Z-3443C	
		With text	White text on red background	○	A22Z-3443R-2
				STOP	A22Z-3443R-4
				STOP	A22Z-3443R-J4
				EMERGENCY STOP	A22Z-3443R-J1
		With text	White text on black background	—	A22Z-3443B-1
				START	A22Z-3443B-3
				ON	A22Z-3443B-5
				OFF	A22Z-3443B-6
				UP	A22Z-3443B-7
				DOWN	A22Z-3443B-8
				POWER ON	A22Z-3443B-9
				OFF-ON	A22Z-3443B-10
				AUTO	A22Z-3443B-J1
				MANUAL	A22Z-3443B-J2
START	A22Z-3443B-J3				
RESET	A22Z-3443B-J4				
ON	A22Z-3443B-J5				
OFF	A22Z-3443B-J6				
POWER ON	A22Z-3443B-J7				
RUN	A22Z-3443B-J8				
UP	A22Z-3443B-J9				
DOWN	A22Z-3443B-J10				
OFF-ON	A22Z-3443B-J11				
MANUAL-AUTO	A22Z-3443B-J12				
REVERSE-FORWARD	A22Z-3443B-J13				
CLOSE-OPEN	A22Z-3443B-J14				
MANUAL OFF AUTO	A22Z-3443B-J15				
Large size	Without text	Black	A22Z-3453B	Used as an Emergency Stop Switch Legend Plate. (See page 28.) Material: Acrylic	
		Red	A22Z-3453R		
		White	A22Z-3453W		
		Transparent	A22Z-3453C		
For Emergency Stop Switch		60-dia. round plate with black letters on a yellow background	A22Z-3466-1	EMERGENCY STOP is engraved on the plate. Used as an Emergency Stop Switch Legend Plate	
		90-dia. round plate with black letters on a yellow background	A22Z-3476-1		
		No print (Round)	A22Z-3460		
		No print (Square)	A22Z-3480		
Character Films		Character print (Round)	—	A22Z-3460-1	
			○	A22Z-3460-2	
			START	A22Z-3460-3	
			STOP	A22Z-3460-4	
		No print (Square)	A22Z-3480		

### Tools

Item	Appearance	Classification	Model	Remarks
Lamp Extractor		---	A22Z-3901	Rubber tool used to easily replace Lamps
Tightening Wrench		---	A22Z-3905	Used to tighten mounting nuts from the back of the panel and to replace the cap of the Lighted Emergency Switch.
Cap Tightening Tool		---	A22Z-3908	Used for replacing the cap of the Half-guard Pushbutton Switch.
Cap Puller		---	A3PJ-5080	Used for removing the cap from the Pushbutton of the Square Lighted Pushbutton Switch.

■ Ratings and characteristics: See pages 13 to 14. ■ Precautions for correct use: See page 23.  
 ■ Dimensions: See page 16. ■ Accessories and tools: See pages 10 to 12.

## Specifications

### Approved Standard Ratings

#### UL, cUL (File No. E41515)

6 A at 220 VAC, 10 A at 110 VAC

#### EN60947-5-1 (Low Voltage Directive)

3 A at 220 VAC

#### CCC (GB14048.5)

3 A at 240 VAC, 1.5 A at 24 VDC

### Ratings

#### Contacts (Standard Load)

Contacts (Standard Load)	Rated voltage	Rated current (A)			
		Induc- tive load	Resis- tive load	Induc- tive load	Resis- tive load
10A	24 VAC	10	10	---	---
	110 VAC	5	10		
	220 VAC	3	6		
	380 VAC	2	3		
	440 VAC	1	2		
	24 VDC			1.5	10
	110 VDC			0.5	2
	220 VDC			0.2	0.6
	380 VDC			0.1	0.2

Note: 1. The above ratings were obtained by conducting tests under the following conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5% RH
- (3) Operating frequency: 20 operations/minute

2. Minimum applicable load: 10 mA at 5 VDC

#### Contacts (Microload)

Rated applicable load	50 mA at 24 VDC (Resistive load)
Minimum applicable load	1 mA at 5 VDC

### LED Indicators

Rated voltage	Rated current	Operating voltage
6 VDC	60 mA (20 mA)	6 VDC±5%
6 VAC	60 mA (20 mA)	6 VAC±5%
12 VAC/VDC	30 mA (10 mA)	12 VAC/VDC±5%
24 VAC/VDC	30 mA (10 mA)	24 VAC/VDC±5%

Note: Values in parentheses are for blue Pushbuttons.

### Super-bright LED Indicator

Rated voltage	Rated current	Operating voltage
24 VAC/VDC	15 mA	24 VAC/VDC±5%

### Incandescent Lamp

Rated voltage	Rated current	Operating voltage
6 VAC/VDC	200 mA	5 V
14 VAC/VDC	80 mA	12 V
28 VAC/VDC	40 mA	24 V

### Voltage-reduction Lighting

Rated voltage	Operating voltage	Applicable lamp (BA9S/Base: 13)
110 VAC	100 VAC (95 to 115 V)	LED Lamp (A22-24A□)
220 VAC	200 VAC (190 to 230 V)	

## Specifications

### Characteristics

Type		Pushbutton Switches		Emergency Stop Switches		Knob-type Selector Switches		Key-type Selector Switch	Indicator		
		Non-lighted models: A22-F A22-T A22-G A22-H A22-S A22-M A22-C A22-D	Lighted models: A22L-T A22L-G A22L-H A22L-C A22L-D	Non-lighted model: A22E	Lighted model: A22EL	Non-lighted model: A22S	Lighted model: A22W				
Item	Mechanical	Non-lighted models: A22-F A22-T A22-G A22-H A22-S A22-M A22-C A22-D		Lighted models: A22L-T A22L-G A22L-H A22L-C A22L-D		Non-lighted model: A22E	Lighted model: A22EL	Non-lighted model: A22S	Lighted model: A22W	Non-lighted model: A22K	M22
	Allowable operating frequency	Momentary operation: 60 operations/minute max.		30 operations/minute max.		Manual reset: 30 operations/minute max. Automatic reset: 30 operations/minute max.				---	
Insulation resistance	Mechanical					30 operations/minute max.				---	
	Electrical					30 operations/minute max.				---	
Dielectric strength										100 MΩ min. (at 500 VDC)	
Dielectric strength	Between terminals of same polarity					2,500VAC, 50/60Hz for 1min					
	Between each terminal and ground					2,500VAC, 50/60Hz for 1min					
Vibration resistance	Malfunction *1					Malfunction *2: 10 to 55 Hz, 1.5-mm double amplitude					
Shock resistance	Destruction	1,000 m/s <sup>2</sup>	1,000 m/s <sup>2</sup>	1,000 m/s <sup>2</sup>		1,000 m/s <sup>2</sup>	1,000 m/s <sup>2</sup>	1,000 m/s <sup>2</sup>	1,000 m/s <sup>2</sup>		
	Malfunction *1	1,000 m/s <sup>2</sup> max.	600 m/s <sup>2</sup> max.	250 m/s <sup>2</sup> max.		1,000 m/s <sup>2</sup> max.	600 m/s <sup>2</sup> max.	1000 m/s <sup>2</sup> max.	600 m/s <sup>2</sup> max.		
Durability	Mechanical	Momentary operation: 5,000,000 operations min.		300,000 operations min.		500,000 operations min.	100,000 operations min.	500,000 operations min.	500,000 operations min.	---	
	Electrical	500,000 operations min.		300,000 operations min.		500,000 operations min.	100,000 operations min.	500,000 operations min.	500,000 operations min.	---	
Ambient operating temperature *2		-20°C to 70°C	-20°C to 55°C	-20°C to 70°C	-20°C to 55°C	-20°C to 70°C	-20°C to 55°C	-20°C to 70°C	-20°C to 55°C		
Ambient operating humidity										35% to 85% RH	
Ambient storage temperature *2										-40°C to 70°C	
Degree of protection *3		IP65 (oil-resistant)	IP65	IP65 (oil-resistant)	IP65	IP65 (oil-resistant)	IP65	IP65 (oil-resistant)	IP65		
Electric shock protection class										Class II	
PTI (tracking characteristic)										175	
Degree of contamination										3 (IEC947-5-1)	

\*1. Malfunction within 1 ms.

\*2. With no icing or condensation.

\*3. Degree of protection from the front of the panel.


### Operating Characteristics (for SPST-NO/SPST-NC)

Type		Pushbutton Switches	Emergency Stop Switches		Knob-type Selector		Key-type Selector Switch	
			Push-lock turn reset system/ Push-lock, key reset	Push-pull	Manual reset	Automatic reset	Manual reset	Automatic reset
Item		A22-F A22-T A22-G A22-H A22-C A22-D A22-S A22-M A22L-T A22L-G A22L-H A22L-C A22L-D	A22E A22EL A22E-□K	A22E-□P	A22S A22W		A22K	
Total travel force (TTF) max.		29.4 N	44.1 N	58.8 N	0.34 N·m*	0.25 N·m for two notches* 0.34 N·m for three notches*	0.34 N·m*	0.25 N·m for two notches* 0.34 N·m for three notches*
Total travel (TT)		5.5 mm max.	10±1 mm	5.5±1 mm	Approx. 90° for two notches (Approx. 45° for three notches)		Approx. 90° for two notches (Approx. 45° for three notches)	
Resetting force (RF) min.		---	0.25 N·m max.*	58.8N max.	0.34 N·m max.*	---	0.34 N·m max.*	---

\* Rotation torque for Emergency Stop Pushbutton, Knob-type Selector, and Key-type Selector Switches.

## Nomenclature

### Model Structure

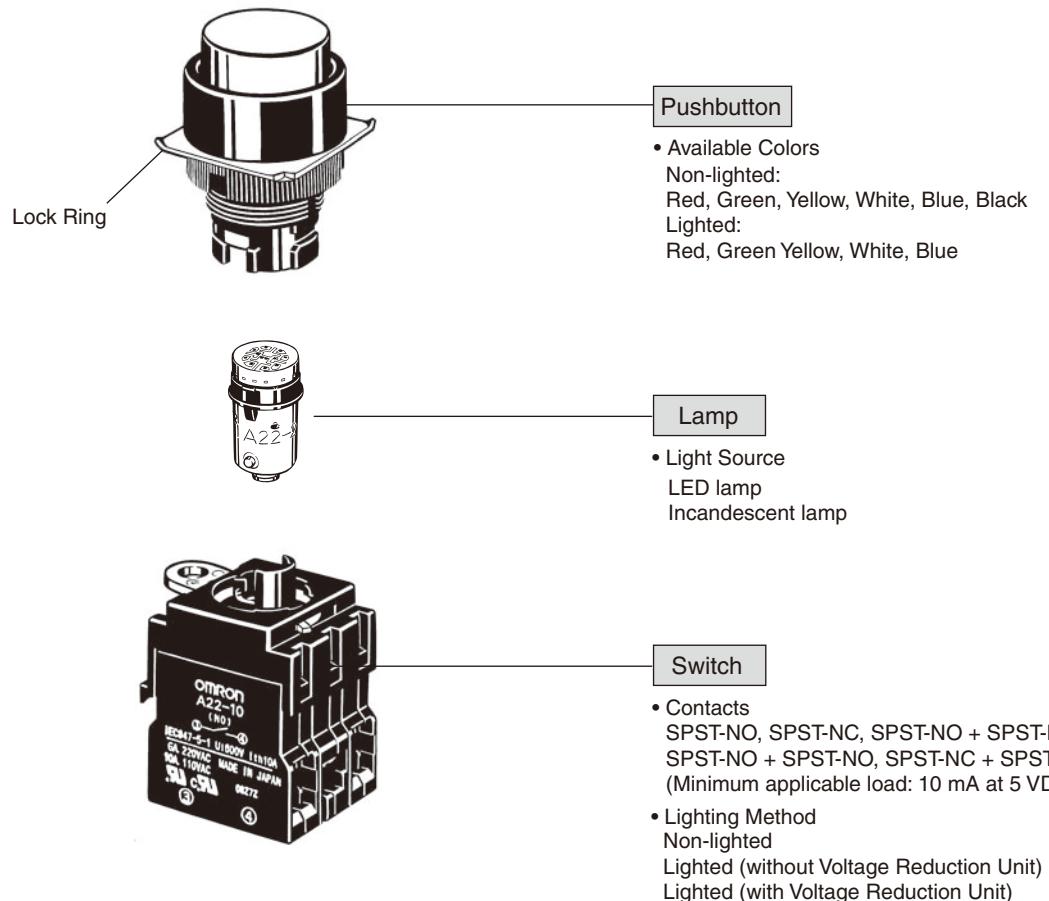


The above illustration shows a lighted model.

## Dimensions



(Unit: mm)

Lighted/Non-lighted Pushbutton Switches (The following illustrations are for momentary operation.)



## Flat Type/A22-F

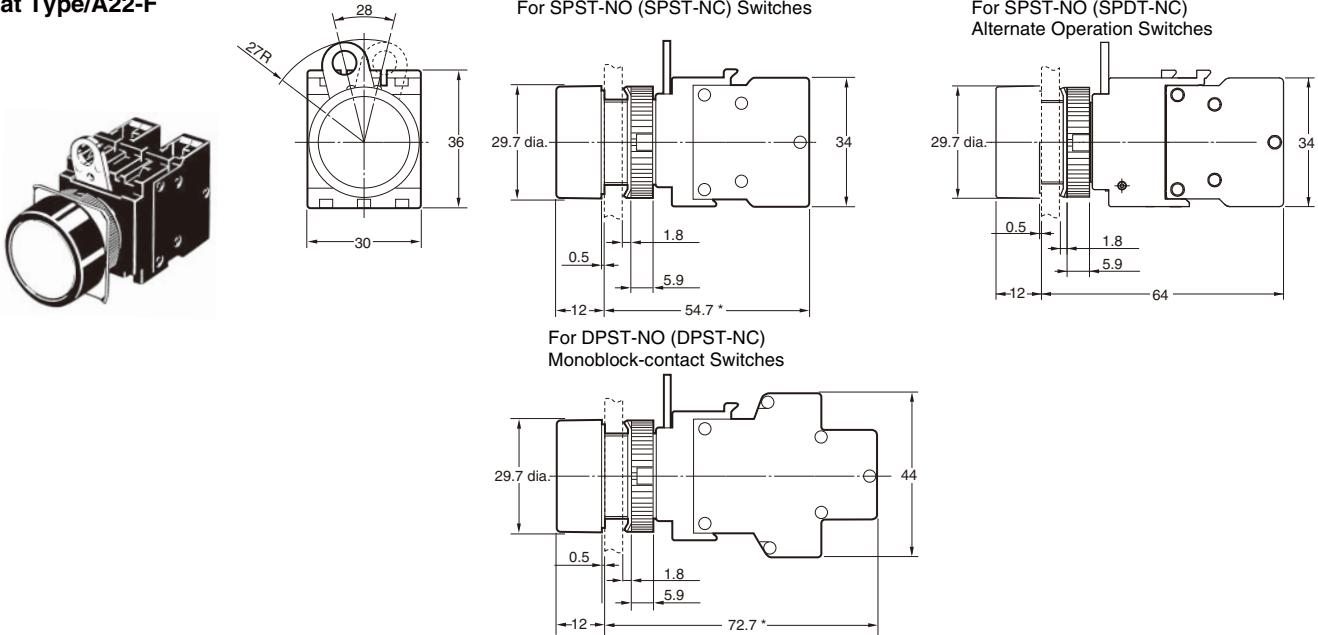



## Half-guard Type/A22-H/A22L-H

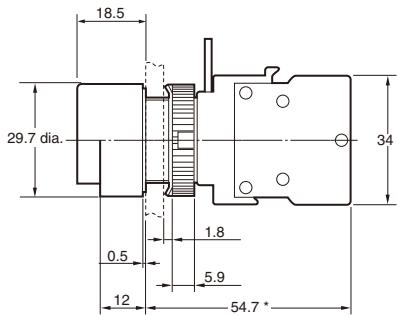


## Projection Type/A22-T/A22L-T

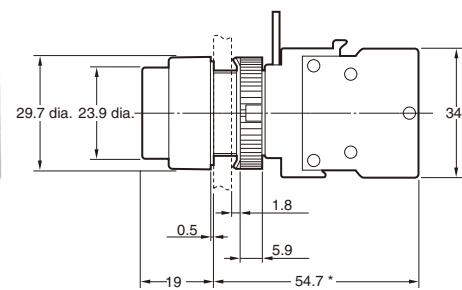



## Full-guard Type/A22-G/A22L-G

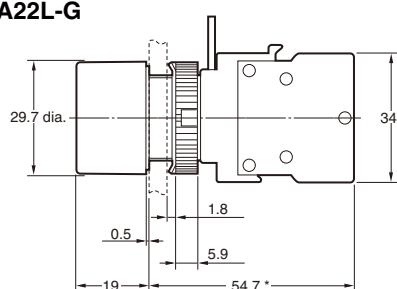



## 40-dia. Mushroom Type/A22-M

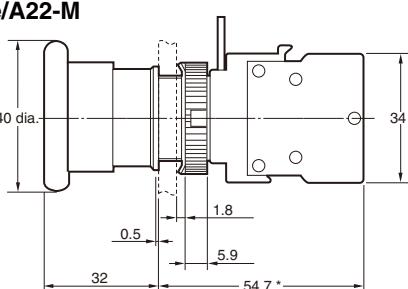

## Square/Projection type/A22-C/A22L-C

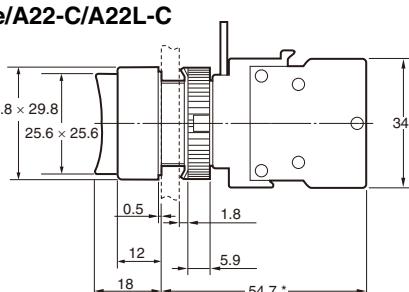

## Square/Full-guard Type/A22-D/A22L-D

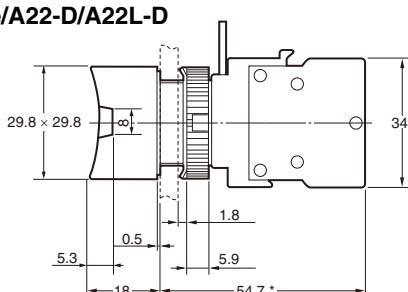


Note: Lighted models have the same dimensions as shown above, whether they are with or without Voltage Reduction Units.

\* Alternate operation models are 9.3 mm longer.

## Dimensions


### Terminal Arrangement (Bottom View)

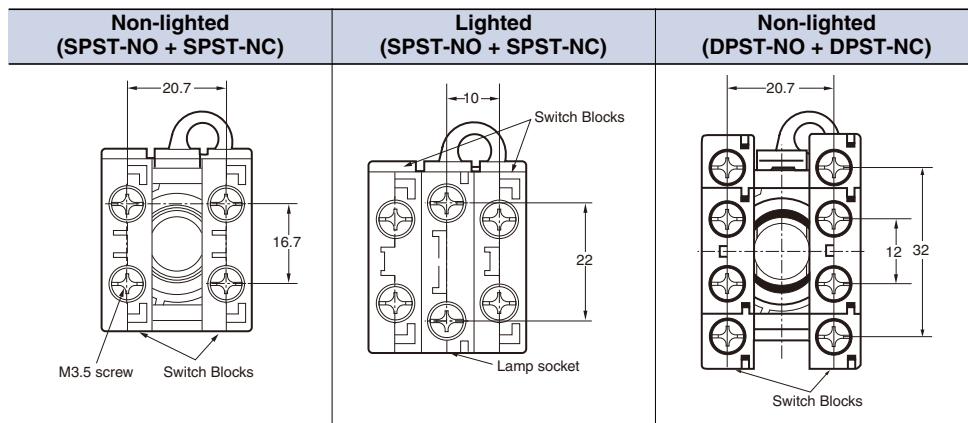

### Terminal Connection

Item	Terminal connection
Non-lighted (SPST-NO + SPST-NC)	BOTTOM VIEW 
Non-lighted (DPST-NO + DPST-NC)	BOTTOM VIEW 
Lighted without Voltage Reduction Unit (SPST-NO + SPST-NC)	BOTTOM VIEW 
Lighted with Voltage Reduction Unit (SPST-NO + SPST-NC)	BOTTOM VIEW 

### Panel Cutouts



### Lock ring is provided as a standard item.

- When applying coating such as paint to the panel, the dimensions should be those after the application of coating.
- Recommended panel thickness: 1 to 5 mm.
- Use an A22Z-R25 Ring when mounting to a panel with 25-mm holes.


## Dimensions

(Unit: mm)

## Accessories


## Legend Plate Frames

## Standard Models A22Z-332□

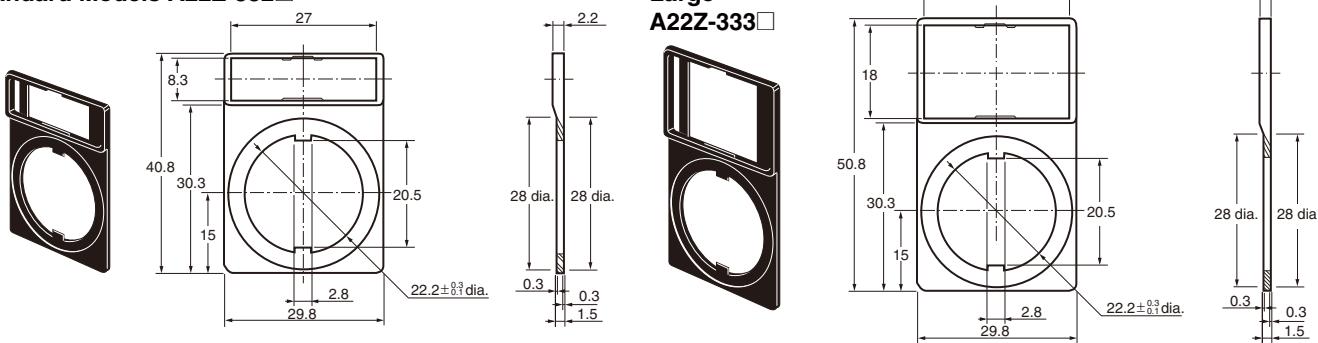


## Lamp


## LED A22-6□, 12□, 24□





## Incandescent lamp A22-5, 12, 24




## Lock Ring A22Z-3360

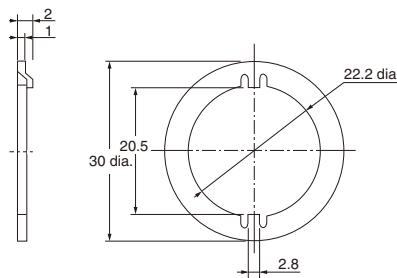




## 25-dia. Ring A22Z-R25



## Color Cap A22Z-30T□




## Hole Plug (Round) A22Z-3530





## Caps

## A22 (for round models) A22Z-3490

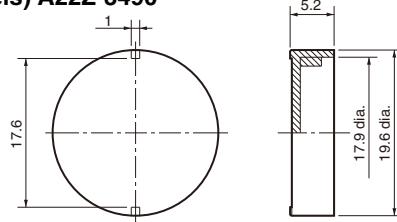

## M22 (for round models) A22Z-3495




## Dimensions

(Unit: mm)

## Sealing Caps


For Flat Models A22Z-3600F

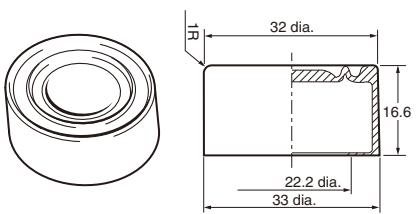

For projection models A22Z-3600T



For full-guard models A22Z-3600G

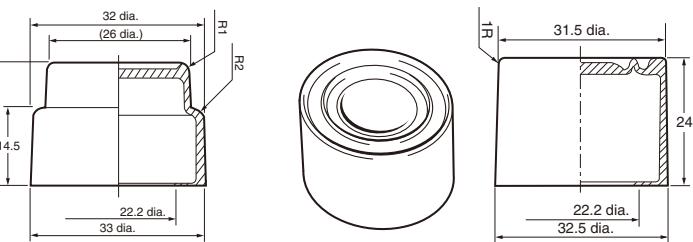



## Metallic Bezel Rings

For Flat/Projection Models A22Z-3580


For full-guard models  
A22Z-3582

## Snap-in Legend Plates


For Standard Models A22Z-3443□-□

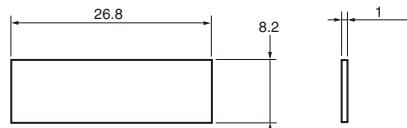


For Large Models A22Z-3453□

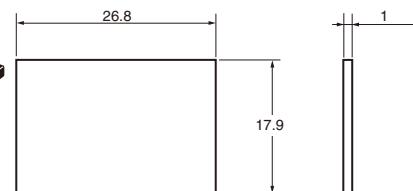

For Emergency-stop Models


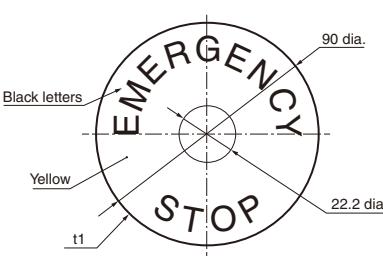


A22Z-3466-1 (60 dia.)




## Character Film

For Round Models A22Z-3460-□




For Square Models A22Z-3480





## Dimensions

(Unit: mm)



Lamp Extractor A22Z-3901

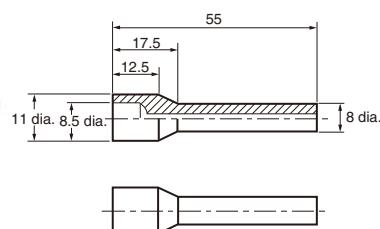


Tightening Wrench A22Z-3905

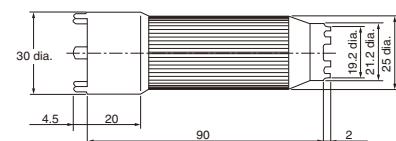



Cap Tightening Tool A22Z-3908

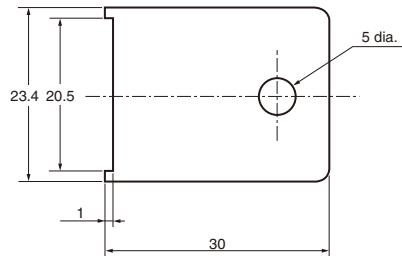



30-dia. Resin Attachment A22Z-A30

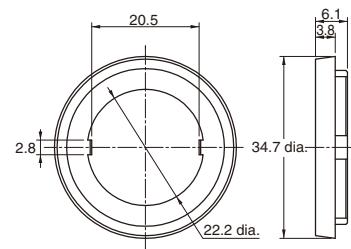



Cap Pul A3PJ-5080

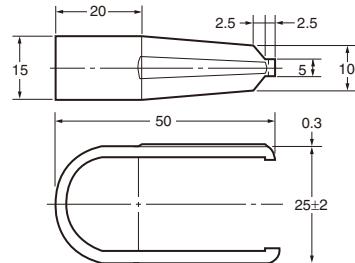



Lock Plate A22Z-3380

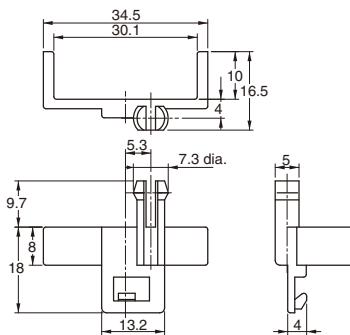

Simple Protective Cover A22Z-3700

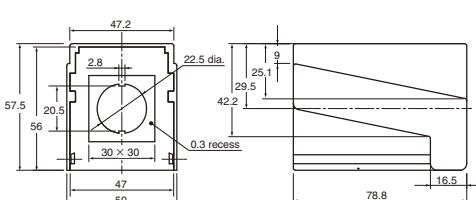


Three-throw Spacer A22Z-3003





## Dimensions

(Unit: mm)


## Control Box (Enclosure) A22Z-B10□





**A22Z-B101 (One Hole)**  
**A22Z-B101Y**

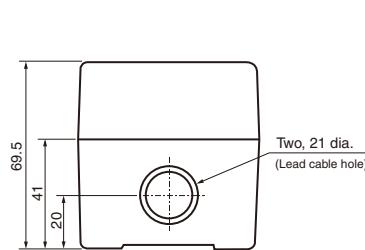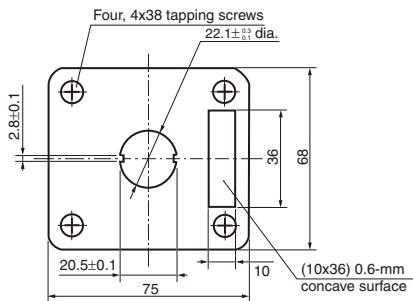


**Cable Port Hole (Top View)**

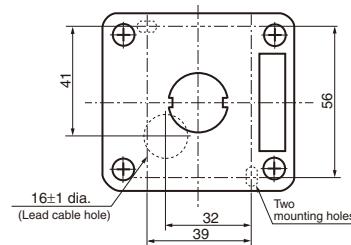



## A22Z-B102 (Two Holes)

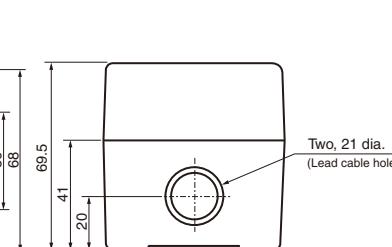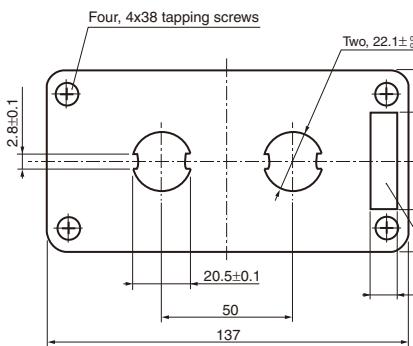


**Cable Port Hole (Top View)**

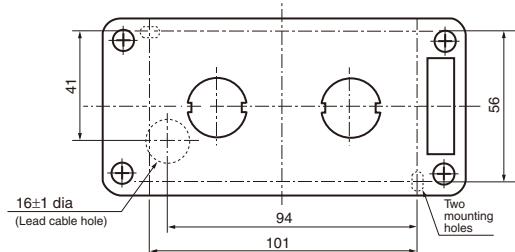


## A22Z-B103 (Three Holes)

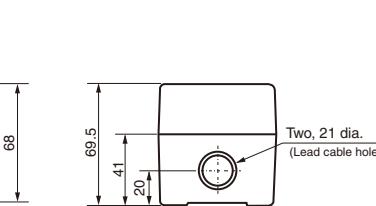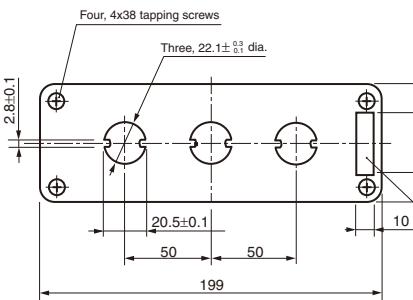

**Cable Port Hole (Top View)**

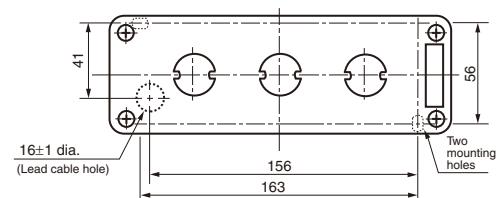

## (Panel Mounting Hole)





## Dimensions

(Unit: mm)


## Control Box A22Z-B20□

## A22Z-B201 (One Hole)



## A22Z-B201Y

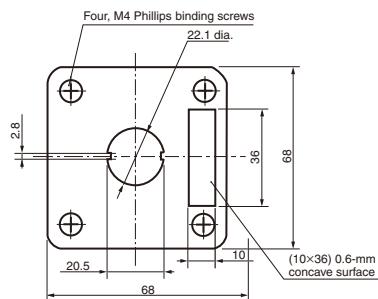


## Cable Port Hole (Top View)





## A22Z-B202 (Two Holes)

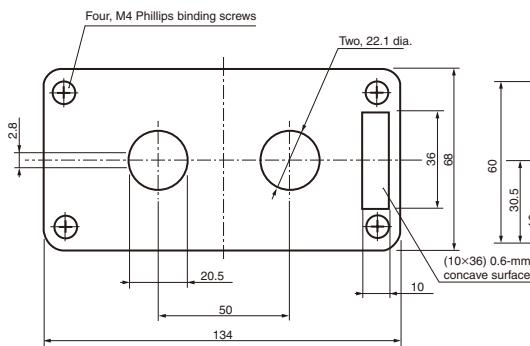


## Cable Port Hole (Top View)

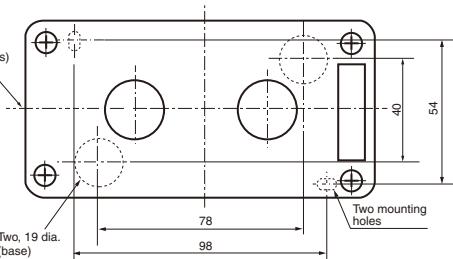


## A22Z-B203 (Three Holes)

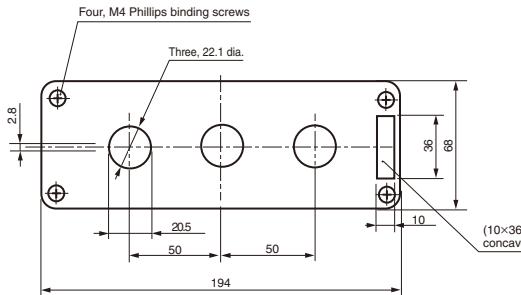

## Cable Port Hole (Top View)

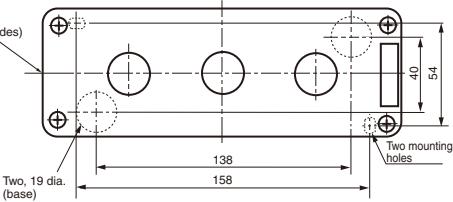

## (Panel Mounting Hole)



## Safety Precautions

Refer to **Safety Precautions for All Pushbutton Switches**.

### WARNING

Do not apply a voltage between the incandescent lamp and the terminal that is greater than the rated voltage. If the incandescent lamp is broken, the Operation Units may pop out.



Always turn OFF the power and wait for 10 minutes before replacing the incandescent lamp. If the lamp is replaced immediately after the power is turned OFF, the remaining heat may cause burns.

### Precautions for Correct Use

#### Mounting

- Do not perform wiring with power supplied to the Switch. Do not touch the terminals or other charged parts of the Switch while power is being supplied. Doing so may result in electric shock.
- Always make sure that the power is turned OFF before mounting, removing, or wiring the Switch, or performing maintenance. Do not tighten the mounting ring more than necessary using tools such as pointed-nose pliers. Doing so will damage the mounting ring. The tightening torque is 0.98 to 1.96 N·m.
- Recommended panel thickness: 1 to 5 mm.

#### Wiring


- When DC-specific LEDs are used, wire the Switch so that the X1 terminal is positive.
- Terminal screws must be Phillips or slotted M3.5 screws with a square washer.
- The tightening torque is 1.08 to 1.27 N·m.
- Solid wires, stranded wires, and crimp terminals can be connected to the Switch.

#### Applicable Wire Size


Stranded wire: 2 mm<sup>2</sup> max.

Solid wire: 1.6 dia. max.

Bare Crimp Terminals



Crimp Terminals with Insulating Sheath



- After wiring the Switch, maintain an appropriate clearance and creepage distance.

#### Operating Environment

- The IP65 model is designed with a degree of protection so that it will not sustain damage if it is subjected to water from any direction to the front of the panel.
- This switch is intended for indoor use only. Using the Switch outdoors will result in failure.

#### LED

- The LED current-limiting resistor is built-in, so internal resistance is not required.
- If commercially available LEDs are used, select the ones that meet the following conditions:  
Base: BA9S/13  
Overall length: 26 mm max.  
Power consumption: 2.6 W max.

#### Others


- If the panel is to be finished with coating, etc., make sure that the panel meets the specified dimensions after the coating.
- Do not subject the Switch to extreme shock or vibration. Doing so will cause malfunctions and damage to the Switch.

#### Using the Microload

- Insert a contact protection circuit, if necessary, to prevent the reduction of life expectancy due to extreme wear on the contacts caused by loads where inrush current occurs when the contact is opened and closed.

The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% ( $\lambda_{60}$ ) (conforming to JIS C5003).

The equation,  $\lambda_{60} = 0.5 \times 10^{-6}/\text{operations}$  indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

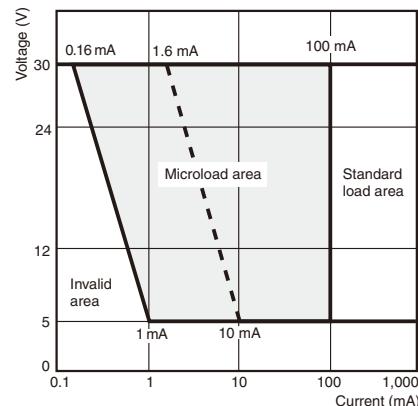


## Application

### Mounting to the Panel

#### Panel Hole Dimensions


- Panel hole dimensions are given below.
- Recommended panel thickness: 1 to 5 mm.

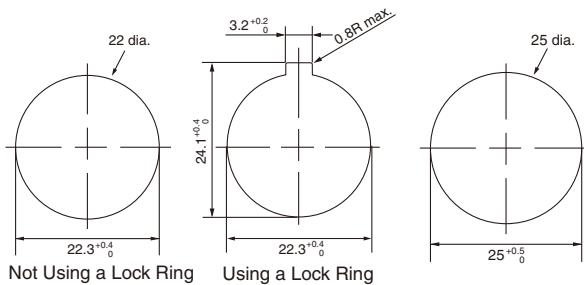


- For 25-dia. holes, always use 25-dia. Rings. (Since the cutout dimensions are large, IP65 cannot be guaranteed unless 25-dia. Rings are used.)
- If outer surface treatment such as coating is performed for the panel, the panel dimensions after outer surface treatment must meet the specified panel dimensions.

#### Matrix Installation

1. The following panel hole dimensions apply when Switch Unit and the Standard-size Legend Plate Frame and Lock Ring are mounted, and lead wires are connected directly to the Switch Block.



2. The following panel hole dimensions apply when the Large-size Legend Plate Frame is mounted, and when crimp terminals are connected to the Switch Block terminals.



Pitches A and B between the centers of the mounting holes are as follows:

#### For 1. above:

Switch Blocks	A
A22-10, A22-10S A22-01, A22-01S	45 mm min.
A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	55 mm min.

#### For 2. above:

Type of crimp terminal	Switch Blocks	B
Bare crimp terminals	A22-10, A22-10S A22-01, A22-01S	51 mm min.
	A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	61 mm min.
Crimp terminals with insulating sheath	A22-10, A22-10S A22-01, A22-01S	60 mm min.
	A22-20, A22-20S, A22-02 A22-02S, A22-11, A22-11S	70 mm min.


Note: 1. The above dimensions are the minimum dimensions for when the wires described under Applicable Wire Size on page 23 are used. If a different wires are used, the wiring dimensions may be different so determine an appropriate pitch before setup.

2. With pushbuttons of external dimensions greater than 30 mm, set the pitch according to the dimensions. (When using matrix installation for the A22-M□, mount with a pitch of 40 mm instead of 30 mm in the diagram above.)


#### Mounting the Operation Unit on the Panel

- Insert the Operation Unit (Pushbutton, etc.) from the front surface of the panel, insert the Lock Ring and the mounting nut from the terminal side, then tighten the nut. Before tightening, check that the rubber washer is present between the Pushbutton Unit and the panel.
- When using a Legend Plate Frame, put one rubber washer each between the Legend Plate Frame and the panel and between the Operation Unit and the Legend Plate Frame. (One rubber washer will be provided when one Legend Plate Frame is ordered.)
- Align the Lock Ring with the groove in the casing, then insert the Lock Ring so that its edge is located on the panel side.

- Tighten the mounting nut at a torque of 0.98 to 1.96 N·m.
- When using a Lock Ring, replace with the supplied Lock Ring, insert the projecting part into the lock slot, and then tighten the mounting nut.

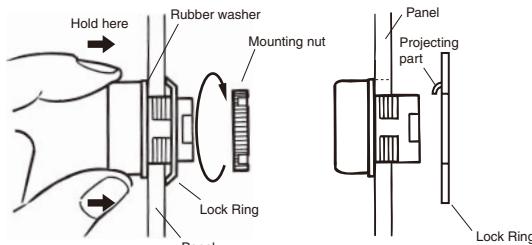


- When the panel cutout dimension is 25 dia., remove the supplied rubber washer and mount the 25-dia. Ring as shown below. (Since the A22Z-R25 is not attached to the main body, order separately.)

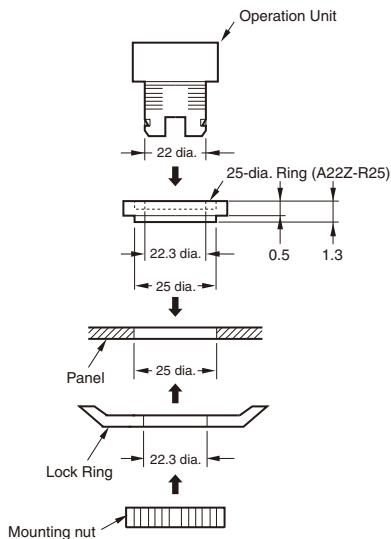


### Mounting the Switch on the Pushbutton Unit

- Insert the Pushbutton Unit into the Switch Unit, aligning the arrow mark inscribed on the Case with the lever on the Switch Blocks, then move the lever in the direction indicated by the arrow in the following figure.



### Removing the Switch


- Move the lever in the direction indicated by the arrow in the following figure, then pull the Pushbutton Unit or the Switch Blocks. Since the lever has a hole with an inside diameter of 6.5 mm, the lever can be moved in the specified direction by inserting a screwdriver into the hole and then moving the screwdriver.

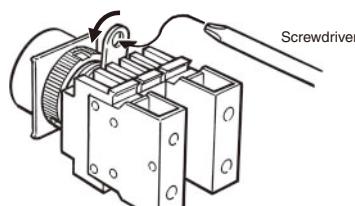

### Mounting/Replacing the Color Cap


#### Projection, Fall-guard

- Grip and rotate the Color Cap with your fingers.



#### Half-guard Indicators


- Put the tips of the Cap Tightening Tool (A22Z-3908) into the Color Cap slot and turn the Tool.



### Assembling the Cap


#### Lighted Pushbutton Switch

- Mount the Color Cap so that the protrusions inside the cap fit into the grooves in the Pushbutton Unit.

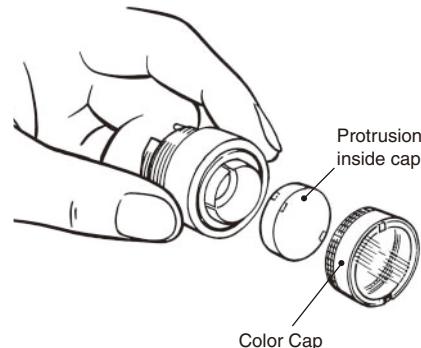


#### Indicator

- Mount the Color Cap so that the protrusions inside the Pushbutton Unit fit into the grooves in the cap.

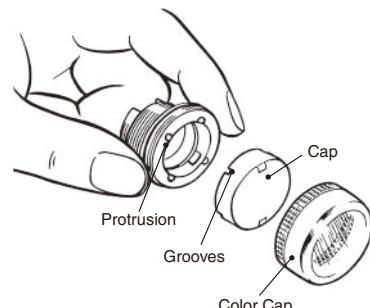



**Square Pushbutton/Indicator****• Square Pushbutton/Indicator**

Insert the protruding tip of the Cap Puller (A3PJ-5080) into the Cap slot, hold the plate spring, and pull them to remove the Color Cap.


**• Mounting the Color Cap:**

Mount the Color Cap on the flange and firmly push the Color Cap. When the Color Cap is inserted, check whether it operates properly. When replacing the Lamp, remove the Color Cap and diffusion plate with fingers or Cap Puller.


Attach the Character Film properly so that it fits inside the protruding part of the diffusion plate. Then, match the diffusion plate to the square flange and insert the Cap.

**Emergency Stop Switch**

- Insert the protrusion of the Tightening Wrench (A22Z-3905) into the Cap slot and then turn to remove the Cap.

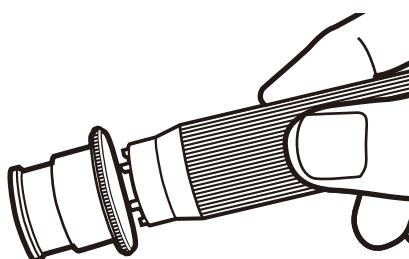**Installing/Replacing the Lamp****Installing/Replacing from the Panel Surface**


- Insert the Lamp Extractor (A22Z-3901) into the lamp, then rotate the Extractor while pressing it.

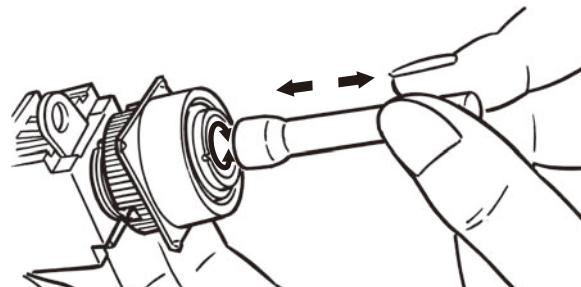**Installing/Replacing on the Switch**


- Grip the lamp with your fingers, then rotate the lamp while pressing it against the Switch.

**Control Box (Enclosure)****Mounting the Switch**

The Standard-size Legend Plate Frame can be mounted. Mount the Frame as shown in the following diagram. Mount the Switch in the same way as for an ordinary panel.

**Creating a Cable Port Hole**


Place the tip of a screwdriver on the surface where the cable port hole is to be created with the cover attached and strike the screwdriver with a hammer to punch four holes.

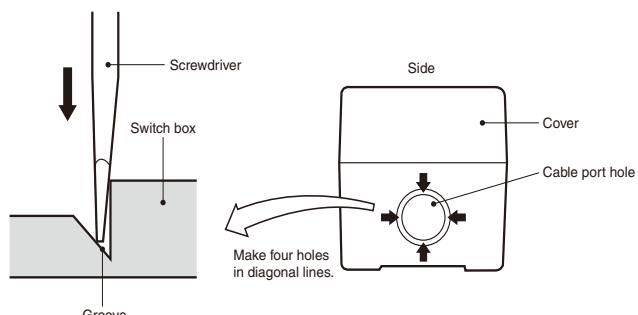

### Securing the Connector Cable


1. Insert the connector into the cable port hole in the Box and secure with the fixing nut inside the box.
2. Open a hole in the thin rubber section of the rubber ring.
3. Pass the tightening cap through the cable, insert the cable into the connector, and tighten the hexagonal nut to secure the cable.

Cable diameter	Connector
7 to 9 dia.	A22Z-3500-1
9 to 11 dia.	A22Z-3500-2

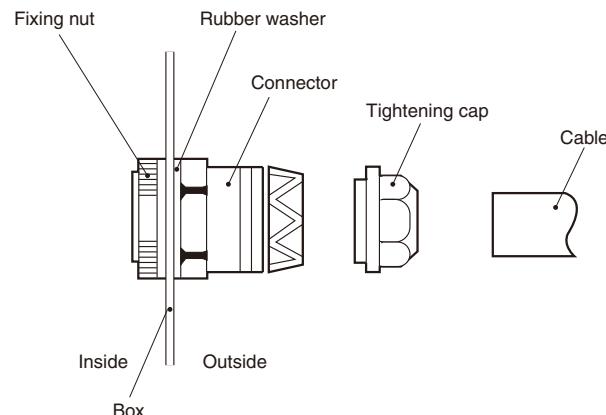



### Installing the Switch Blocks

- Hook the small protrusion on the Switch Block into the groove on the Mounting Latch on the other side of the lever, then push up the Switch Block in the direction indicated by the arrow in the figure below.

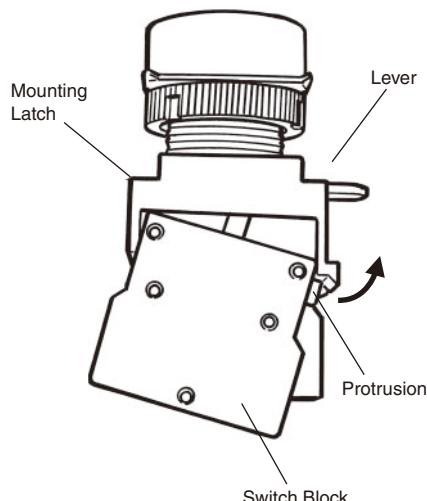

### Removing the Switch Blocks


- Insert a screwdriver between the Mounting Latch and the Switch Block, then push down the screwdriver in the direction indicated by the arrow in the following figure.

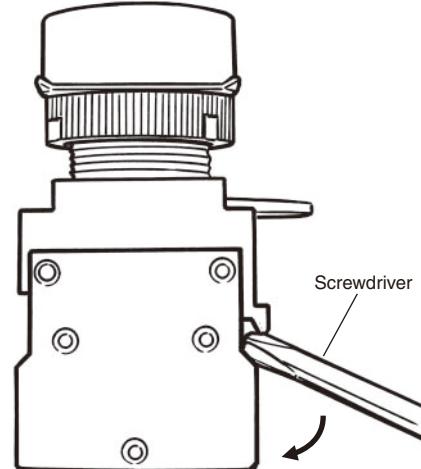

### Wiring


#### Wiring Round Crimp Terminals

- Loosen the terminal screw from the Switch Unit until it completely comes off the groove, insert a screwdriver as shown in the following figure, then push up the washer in the direction indicated by the arrow to temporarily secure it. Now, a round crimp terminal can be connected. After inserting the terminal, tighten the screws to complete wiring.

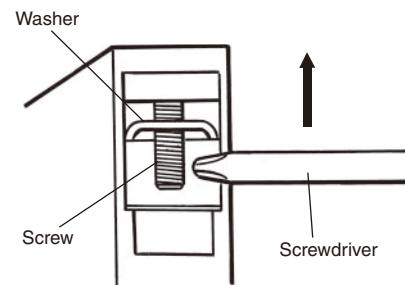


### Engraving

- Engrave the characters on the surface on the Cap. Make sure that the characters are aligned parallel to the imaginary line connecting the two protruding portions to the left and right of the Cap.
- The characters must not be engraved deeper than 0.5 mm. Apply an alcohol-based paint coating, such as melamine, alkyd, or acrylic resin paint coating, to the engraved characters.




### Affixing Character Film

- Hold the Cap, remove the cardboard on the Film, and attach the Film to the Cap. Make sure that the protruding portions of the Cap engage the cutout portions of the Film and that the characters are aligned parallel to the imaginary line connecting the two protruding portions to the left and right of the Cap.

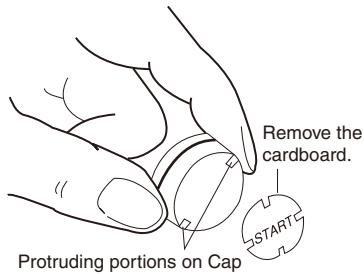


- The Snap-in Legend Plate is easily removed by pressing the Snap-in Legend Plate from the back of the Legend Plate Frame.
- The Legend Plate Frame is made of acrylic resin, which is easily damaged by shock. Be sure to handle the Legend Plate Frame with care.




### Mounting and Dismounting Snap-in Legend

- Press and secure the Snap-in Legend Plate onto the Legend Plate Frame.
- The direction of the characters will vary with the mounting direction of the control panel if the Switch is a knob or key selector model.

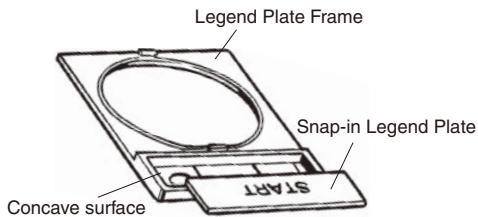

- To easily remove the Snap-in Legend Plate from the Legend Plate Frame mounted to the panel, insert a Tool with a thin tip into the space between the Snap-in Legend Plate and the Legend Plate Frame.

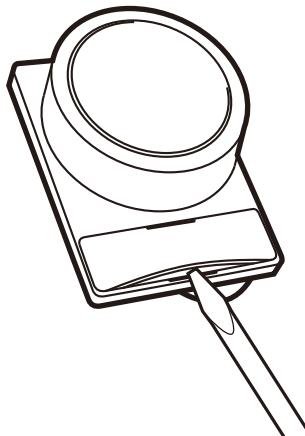


### Engraving Method



#### Material: Acrylic

- Engrave the characters directly on the matted side of the Snap-in Legend Plate.
- The characters must be engraved no deeper than 0.5 mm.
- Apply alcohol-based paint coating to the engraved characters.
- If the Snap-in Legend Plate is transparent, engrave the mirror-written characters on the back of the Snap-in Legend Plate and apply paint coating to the characters. Then apply paint coating of a different color to the remaining part of the Snap-in Legend Plate.

### Mounting Three-throw Spacer

Press and secure the two protruding portions of the Three-throw Spacer to the two indented portions of the inner side of the control panel.

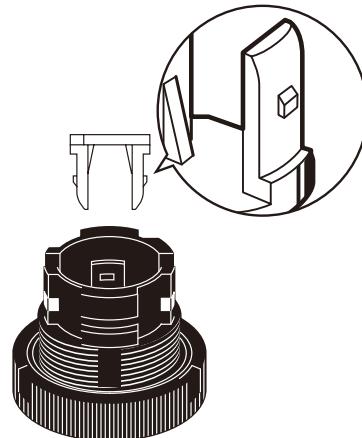

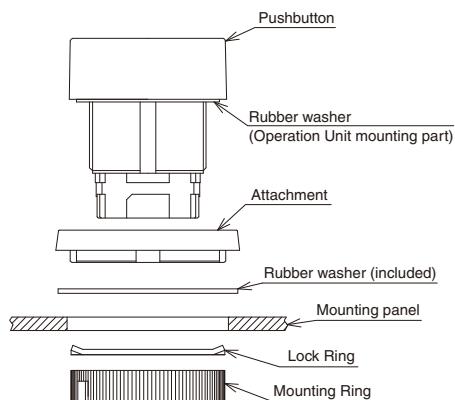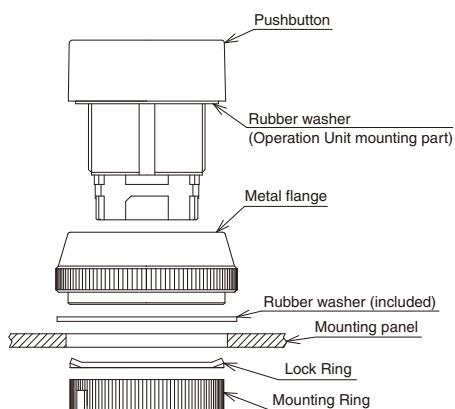**Mounting the 30-dia. Resin Attachment****Mounting the 30-dia. Metal Flange**

## Safety Precautions for All Pushbutton Switches

For the individual precautions for a Switch, refer to the *Safety Precautions* in the section for that Switch.

### **WARNING**

Do not perform wiring with power supplied to the Switch. Do not touch the terminals or other charged parts of the Switch while power is being supplied. Doing so may result in electric shock.



### **Caution**

Do not apply a voltage between the incandescent lamp and the terminal that is greater than the rated voltage. Doing so may damage the lamp or LED and cause the Operation Unit to pop out.



Always turn OFF the power and wait for 10 minutes before replacing the incandescent lamp. If the lamp is replaced immediately after the power is turned OFF, the remaining heat may cause burns.



### **Precautions for Correct Use**

For details, refer to the *Precautions for Correct Use* in the *Technical Guide for Pushbutton Switches*.

# Technical Guide for Pushbutton Switches

## Precautions for Correct Use of Pushbutton Switches


● For the individual precautions for a Switch, refer to the precautions in the section for that Switch.

### Electrical Characteristics

#### 1. Operating Load


- The switching load capacity of the Switch greatly varies between AC and DC. Always be sure to apply the rated load. The control capacity will drastically drop if it is a DC load. This is because a DC load has no current zero-cross point, unlike an AC load. Therefore, if an arc is generated, it may continue for a comparatively long time. Furthermore, the current direction is always the same, which results in a contact relocation phenomena whereby the contacts easily stick to each other and do not separate when the surfaces of the contacts are uneven.
- Some types of load have a great difference between normal current and inrush current. Make sure that the inrush current is within the permissible value. The greater the inrush current in the closed circuit is, the greater the contact abrasion or shift will be. Consequently, contact weld, contact separation failures, or insulation failures may result. Furthermore, the Switch may be broken or damaged.
- If the load is inductive, counter-electromotive voltage will be generated. The higher the voltage is, the higher the generated energy will be, which will increase the abrasion of the contacts and contact relocation phenomena. Be sure to use the Switch within the rated conditions.

#### Inrush Current

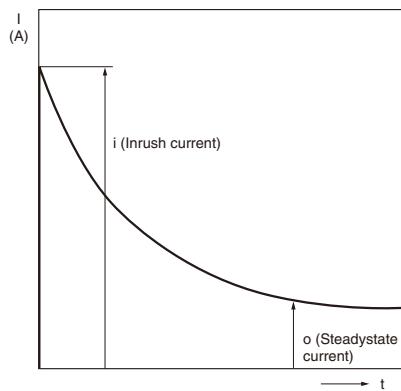

- Approximate control capacities are given in ratings tables, but these alone are insufficient to guarantee correct operation. For special types of load, with unusual switching voltage or current waveforms, test whether correct operation is possible with the actual load before application.
- When switching for microloads (voltage or current), use a Switch with microload specifications. The reliability of silver-plated contacts, which are used in Switches for standard loads, will be insufficient for microloads.
- When switching microloads or very high loads that are beyond the switching capacity of the Switch, connect a relay suitable for the load.

#### Type of Load vs. Inrush Current

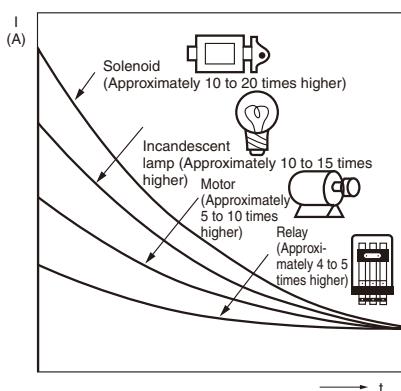

All the performance ratings given are for operation under the following conditions unless otherwise specified.

Inductive load: A minimum power factor of 0.4 (AC) and a maximum time constant of 7 ms (DC)

Lamp load: An inrush current 10 times higher than the steady-state current

Motor load: An inrush current 6 times higher than the steady-state current



Note: Inductive loads can cause problems especially in DC circuitry. Therefore, it is essential to know the time constants (L/R) of the load.

#### 2. Load Connections

Do not connect a single Switch to two power supplies that are different in polarity or type.

#### Connection of Different Polarities

The power supply may short-circuit if the loads are connected in the way shown in the "incorrect" example below.

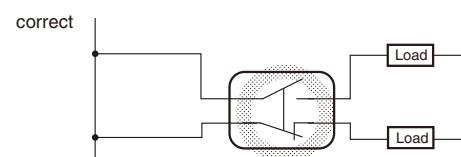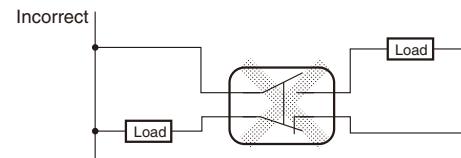


Connect the load to the same polarity.


Even in the "correct" example, note that the insulation performance of the switch may deteriorate and the switch life may be shortened because loads are connected to both contacts.

#### Connection of Different Power Supplies

The DC and AC power may be mixed for the circuit shown below.

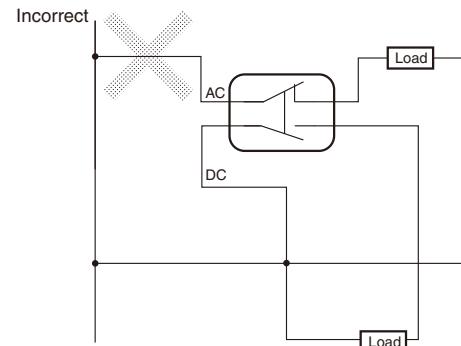

Do not design a circuit where voltage is imposed between contacts, otherwise contact weld may result.

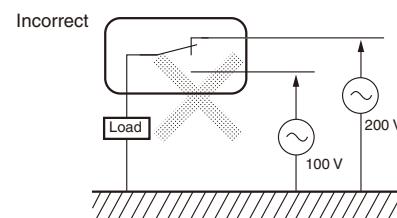






# Technical Guide for Pushbutton Switches

## 3. Contact Protective Circuit



Apply a contact protective circuit to extend the contact life, prevent noise, and suppress the generation of carbide or nitric acid. Be sure to apply the contact protective circuit correctly, otherwise an adverse effect may occur. The following provides typical examples of contact protective circuits. If the Limit Switch is used in an excessively humid

location for switching a load that easily generates arcs, such as an inductive load, the arcs may generate NO<sub>x</sub>, which will change into HNO<sub>3</sub> if it reacts with moisture. Consequently, the internal metal parts may corrode and the Limit Switch may fail. Be sure to select the ideal contact preventive circuit from the following.

### Typical Examples of Contact Protective Circuits

Circuit example	Applicable current		Feature and details		Element selection
	AC	DC			
CR circuit			*	Yes	*When AC is switched, the load impedance must be lower than the CR impedance.
			Yes	Yes	The operating time will be greater if the load is a relay or solenoid. Connecting the CR circuit in parallel to the load is effective when the power supply voltage is 24 or 48 V and in parallel to the contacts when the power supply voltage is 100 to 200 V.
Diode method		No	Yes		Energy stored in the coil is changed into current by the diode connected in parallel to the load. Then the current flowing to the coil is consumed and Joule heat is generated by the resistance of the inductive load. The reset time delay with this method is longer than that in the CR method.
Diode and Zener diode method		No	Yes		This method will be effective if the reset time delay caused by the diode method is too long.
Varistor method			Yes	Yes	This method makes use of constant-voltage characteristic of the varistor so that no high-voltage is imposed on the contacts. This method causes a reset time delay. Connecting a varistor in parallel to the load is effective when the supply voltage is 24 to 48 V and in parallel to the contacts when the supply voltage is 100 to 200 V.

Do not apply contact protective circuits as shown below.

	This circuit effectively suppresses arcs when the contacts are OFF. The capacitor will be charged, however, when the contacts are ON. Consequently, when the contacts are ON again, short-circuited current from the capacitance may cause contact weld.		This circuit effectively suppresses arcs when the contacts are OFF. When the contacts are ON again, however, charge current will flow to the capacitor, which may result in contact weld.
---	--	---	---

Switching a DC inductive load is usually more difficult than switching a resistive load. By using an appropriate contact protective circuit, however, switching a DC inductive load will be as easy as switching a resistive load.

## 4. Switching


- Do not use the Switch for loads that exceed the rated switching capacity or other contact ratings. Doing so may result in contact weld, contact separation failures, or insulation failures. Furthermore, the Switch may be broken or damaged.
- Do not touch the charged switch terminals while power is supplied, otherwise an electric shock may be received.
- The life of the Switch varies greatly with switching conditions. Before using the Switch, be sure to test the Switch under actual conditions. Make sure that the number of switching operations is within the permissible range. If a deteriorated Switch is used continuously, insulation failures, contact weld, contact failures, switch damage, or switch burnout may result.

- Do not apply excessive or incorrect voltages to the Switch or incorrectly wire the terminals. Otherwise, the Switch may not function properly and have an adverse effect on external circuitry. Furthermore, the Switch itself may become damaged or burnt.
- Do not use the Switch in locations where flammable or explosive gases are present. Otherwise switching arcs or heat radiation may cause a fire or explosion.
- Do not drop or disassemble the Switch, otherwise it may not be capable of full performance. Furthermore, it may be broken or burnt.


## Mechanical Conditions

### Operating Force and Operating Method

- Fingertip operation is an important feature of Pushbutton Switches. In terms of Switch operation, Pushbutton Switches differ greatly from detection switches such as Microswitches. Operating the Switch using a hard object (e.g., metal), or with a large or sudden force, may deform or damage the Switch, resulting in faulty or rough operation, or shortening of the Switch life. The strength varies with the size and construction of the Switch. Use the appropriate Switch for the application after confirming the operating method and operating force with this catalog.



- The pushbutton surface is composed of resin. Therefore, do not attempt to operate the pushbutton using a sharp object, such as a screwdriver or a pair of tweezers. Doing so may damage or deform the pushbutton surface and result in faulty operation.

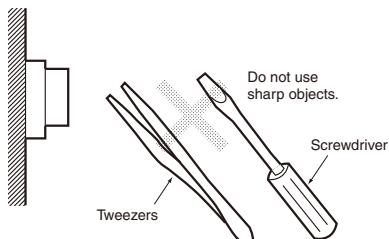


### Mounting


- Switches can be broadly divided into two categories according to mounting method: panel-mounting models and PCB-mounting models. Use the appropriate model for the mounting method required. Basically, panel-mounting Switches can withstand a greater operating force than PCB-mounting Switches. If, however, the panel thickness or the panel-cutout dimensions are not suitable for the Switch, it may not be able to withstand the normal operating force. With continuous mounting in particular, select a panel of a thickness that is easily sufficient to withstand the total operating force.

- Panel-mounting Switches can be divided into two categories according to the mounting method: snap-in mounting models and screw-mounting models. Snap-in mounting Switches are held in place with the elasticity of resin or a metal leaf spring. Do not attempt to modify the spring after mounting. Doing so may result in faulty operation or damage the mounting structure. Mount screw-mounting models using the screws and nuts provided (or individually specified). Tighten the screws to the specified torque. Mounting with different screws or nuts, or tightening beyond the specified torque may result in distortion of the inside of the case or damage to the screw section.




#### Snap-in Mounting



#### Screw Mounting



- Subjecting the Switch to severe vibrations or shock may result in faulty operation or damage. Also, many of the Switches are composed of resin so contact with sharp objects may result in damage to the surface. This kind of damage may spoil the appearance of the Switch or result in faulty operation. Do not throw or drop the Switch.

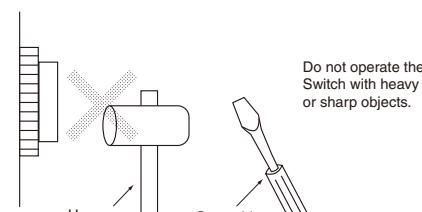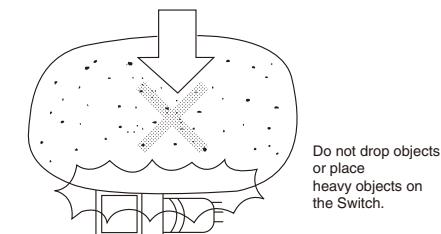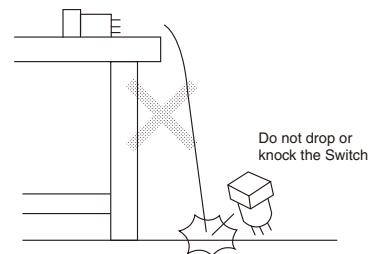


# Technical Guide for Pushbutton Switches


## Mounting Precautions

### Wiring

- Perform wiring so that the lead wires will not be caught on other objects as this will cause stress on the Switch terminals. Wire the Switch so that there is slack in the lead wires and fix lead wires at intermediate points. If the panel to which the Switch is mounted needs to be opened and closed for maintenance purposes, perform wiring so that the opening and closing of the panel will not interfere with the wiring.

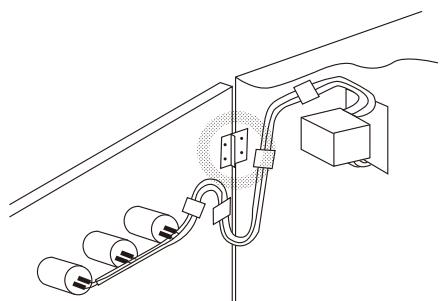

- With miniature Switches, the gap between the terminals is very narrow. Use protective or heat-absorbing tubes to prevent burning of the wire sheath or shorting.

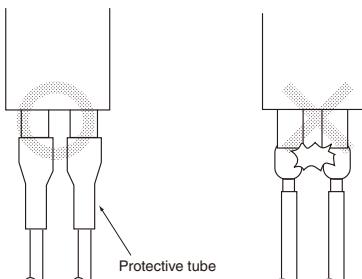

### Soldering


- There are two methods for soldering the Switch: hand soldering and automatic soldering. In addition, automatic soldering itself can be divided into two types : dip soldering and reflow soldering. Use the soldering method appropriate for the mounting method.

### Typical Soldering Example


Method		Soldering device	Application
Hand soldering		Soldering iron	Small quantities Different materials Lead wire terminals
Automatic soldering	Dip soldering	Jet soldering bath Dip soldering bath	Large quantities of discrete terminals
	Reflow soldering	Infrared reflow (IR) soldering bath Vapor-phase (VPS) reflow soldering bath	Large quantities of miniature SMD terminals

- Do not use soldering flux that contains chlorine. Doing so may result in metal corrosion.


- Perform hand soldering using the appropriate soldering iron.

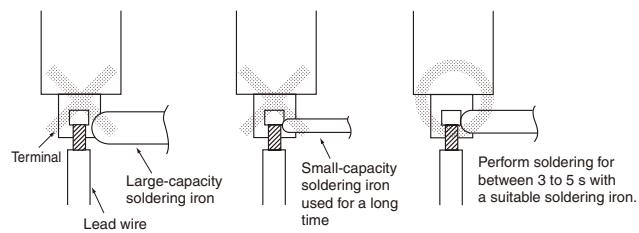



- With the exception of PCB-mounting Switches, when performing hand soldering, hold the Switch so that the terminals point downwards so that flux does not get inside the Switch.

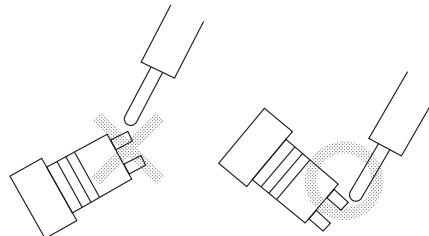

- Leave a gap of at least 1 mm between the soldered parts and the surface of the case so that flux does not get inside the Switch.




- When applying flux using a brush, use a sponge soaked in flux as shown below. Do not apply more than is necessary. Also, apply the flux with the PCB inclined at an angle of less than 80° so that flux does not flow onto the mounting surface of the Switch.

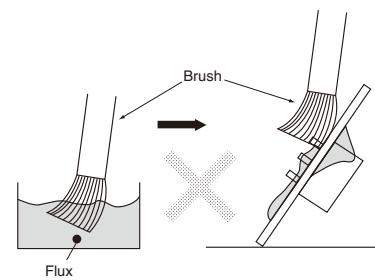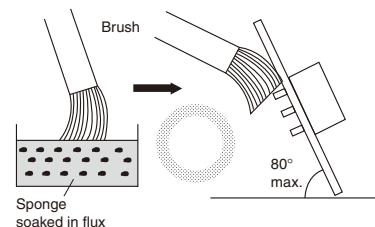


# Technical Guide for Pushbutton Switches


- Do not place PCBs that have had flux applied or have been soldered on top of each other. Otherwise, the flux on the PCBs solder surface may stain the upper part of the Switch or even permeate the inside of the Switch and cause contact failure. Be sure to insert a special PCB stocker.

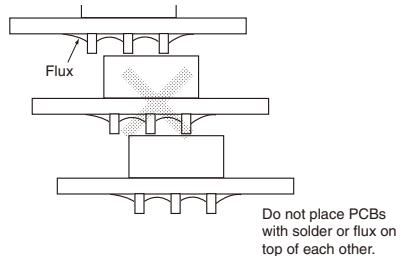

- When performing soldering with a dip soldering bath, ensure that the flux does not reach a higher level than the PCB.




- Flux is especially likely to rise up at the edges of the PCB. If the Switch is mounted near the edge of the PCB, create a gap between the edge by using a split PCB, and insert the PCB in the soldering bath so that the edge that is farthest from the Switch enters the bath first.

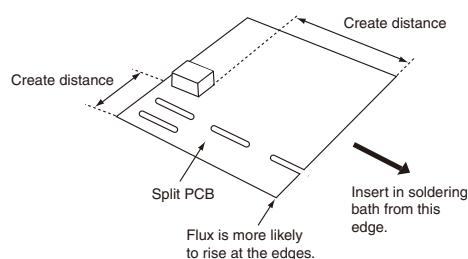

## Storage

- When the Switch is left unused or stored for long periods, the ambient conditions can have a great effect on the condition of the Switch. In certain environments, leaving the Switch exposed may result in deterioration (i.e., oxidation, or the creation of an oxide film) of the contacts and terminals, causing the contact resistance to increase, and making it difficult to solder the lead wires. Therefore, store in a well-ventilated room, inside, for example, a non-hygrosopic case, in a location where no corrosive gases are present.

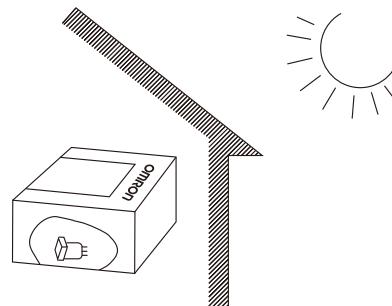

- If the Switch is stored in a location where it will be exposed to direct light, colored resin in the colored plate may fade. Therefore, do not store the Switch in locations where it will be exposed to direct light.

## Read and Understand This Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranty and Limitations of Liability

### WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

### LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

## Application Considerations

### SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the product.

At the customer's request, OMRON will provide applicable third party certification documents identifying ratings and limitations of use that apply to the products. This information by itself is not sufficient for a complete determination of the suitability of the products in combination with the end product, machine, system, or other application or use.

The following are some examples of applications for which particular attention must be given. This is not intended to be an exhaustive list of all possible uses of the products, nor is it intended to imply that the uses listed may be suitable for the products:

- Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this catalog.
- Nuclear energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
- Systems, machines, and equipment that could present a risk to life or property.

Please know and observe all prohibitions of use applicable to the products.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Disclaimers

### CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons.

It is our practice to change model numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the product may be changed without any notice. When in doubt, special model numbers may be assigned to fix or establish key specifications for your application on your request. Please consult with your OMRON representative at any time to confirm actual specifications of purchased product.

### DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

### ERRORS AND OMISSIONS

The information in this catalog has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

### PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON Warranty and Limitations of Liability.

### PROGRAMMABLE PRODUCTS

OMRON shall not be responsible for the user's programming of a programmable product, or any consequence thereof.

### COPYRIGHT AND COPY PERMISSION

This catalog shall not be copied for sales or promotions without permission.

This catalog is protected by copyright and is intended solely for use in conjunction with the product. Please notify us before copying or reproducing this catalog in any manner, for any other purpose. If copying or transmitting this catalog to another, please copy or transmit it in its entirety.

2007.3

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron](#):

[A22-TA](#) [A22L-CW](#)