


IC1206A333R-10

**UNCONTROLLED
DOCUMENT**

PHYSICAL DIMENSIONS:


A	3.20 [.126]	$\pm 0.20[.008]$
B	1.60 [.063]	$\pm 0.20[.008]$
C	1.10 [.043]	$\pm 0.30[.012]$
D	0.50 [.020]	$\pm 0.30[.012]$

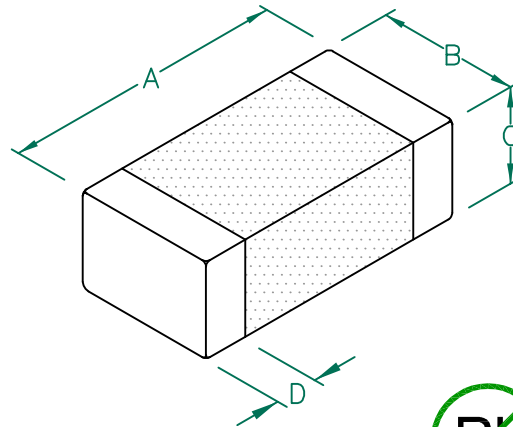

ELECTRICAL CHARACTERISTICS:


L (nH) $\pm 10\%$	36,300	Max
	33,000	Nom
	29,700	Min@ 5mA
Q (Min)	35	
Freq. (MHz)	0.4	
Self-Resonant Freq (MHz)	13	
DCR(Max) Ω	1.05	
I (Max)	100mA	
I (Operating)	5mA	

LAND PATTERNS FOR REFLOW SOLDERING

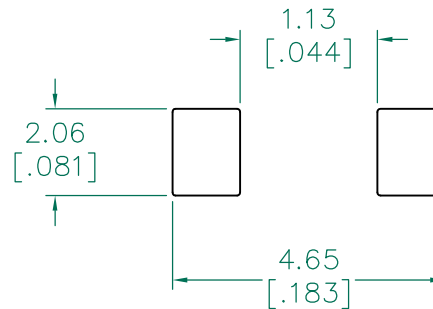

(For wave soldering, add 0.762
(0.030) to this dimension)

RECOMMENDED SOLDERING CONDITIONS

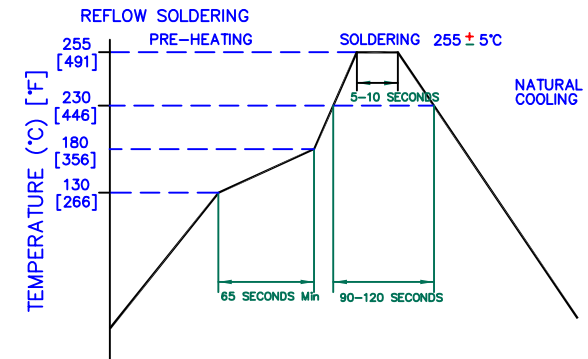

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved. Laird				
E	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU					
D	UPDATE COMPANY LOGO	06/24/08	JRK					
C	UPDATE NOTES, CHANGE TOLS ON C DIMS CHG ELECT VALUES CHG D DIMS AND TOLS	01/18/07	JRK					
B	CHG P/N ADD 30mA TO ELECT BOX REV LANDPATTERN DIMS REVISE/ADD NOTES	02/03/06	JRK					
A	ORIGINAL DRAFT	5/27/04	JRK	DATE: 05/27/04		SCALE: NTS	SHEET: 2 of 2	
REV	DESCRIPTION	DATE	INT	CAD # IC1206A333R-10-E		TOOL # -		
				PROJECT/PART NUMBER: IC1206A333R-10		REV E	PART TYPE: CO-FIRE	DRAWN BY: JRK