


Silicon Photodetector

BPX65 Series


The BPX65 family of detectors feature Centronic's 1mm² high speed, high sensitivity chip already successful in a wide variety of applications. The chip can be packaged in various forms suitable for fibre-optic communication, such as the AX65-RF (precisely centred, isolated, low chip to window spacing) a standard 2 or 3 lead TO18 or even epoxy encapsulated. It has also been used for encoder designs and with MIL SPEC release at the heart of advanced laser warning systems.

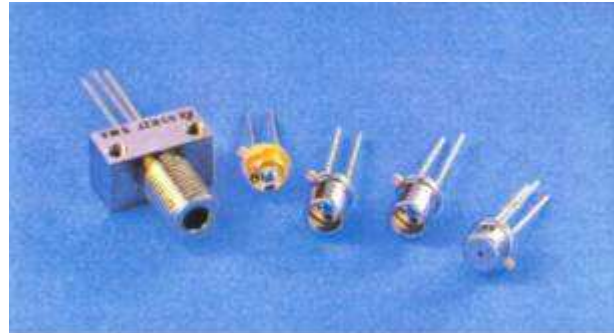


ABSOLUTE MAXIMUM RATINGS

	Max. Rating
DC Reverse Voltage	50V
Peak Pulse Current (1 μ s, 1% duty cycle)	200mA
Peak DC Current	10mA
Illumination level for saturation	5W/cm ²
Storage Temperature Range	-55°C to + 125°C
Operating Temperature Range	-55°C to + 120°C
Soldering Temperature Range	200°C

Series BPX65 – Typical Spectral Response

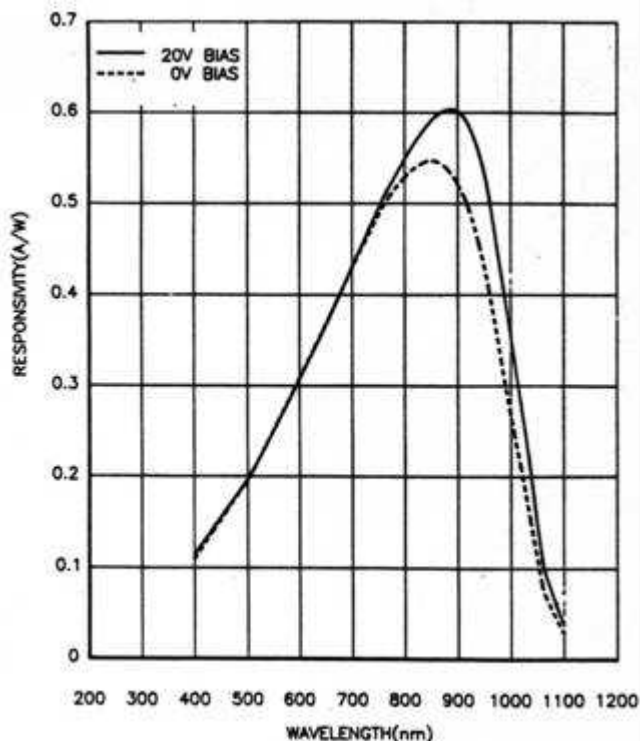

Series BPX65 – Typical Capacitance versus Bias Voltage

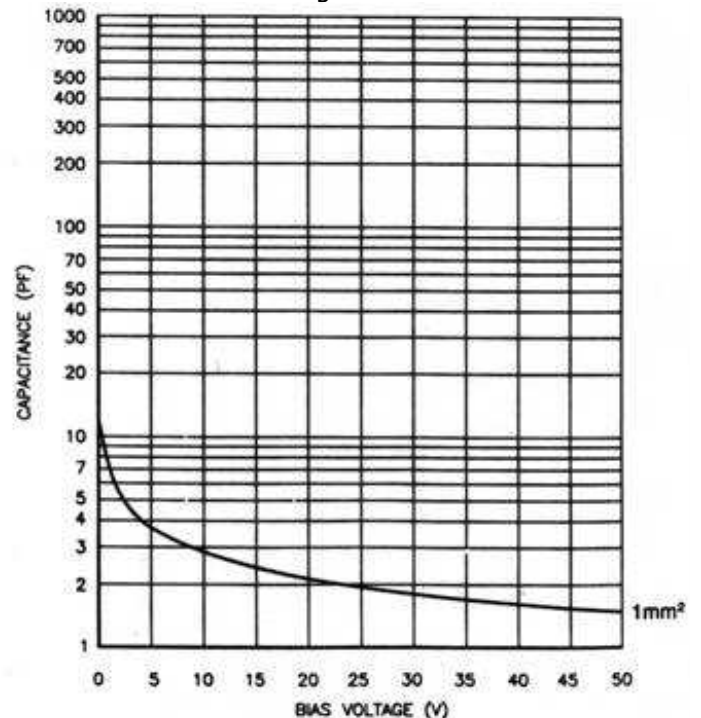

Electrical / Optical Specifications

Characteristics measured at 22°C (±2) ambient.

Single Elements BPX65 Series

Type No.	Active Area		Responsivity A/W $\lambda = 900 \text{ nm}$		Dark Current nA		NEP $\text{WHz}^{-1/2}$ $\lambda = 900 \text{ nm}$	Capacitance pF		Risetime ns $\lambda = 820 \text{ nm}$ $R_L = 50 \Omega$	Package
	mm^2	mm	Min.	Typ.	Max.	Typ.	Typ.	$V_r = 0V$ Max.	$V_r = 20V$ Max.	Typ.	
BPX65	1	1 x 1 mm	0.52	0.55	5	1	3.3×10^{-14}	20	3.5	3.5	TO18
AX65R2F	1	1 x 1 mm	0.52	0.55	5	1	3.3×10^{-14}	20	3.5	3.5	TO46
BPX65RT	1	1 x 1 mm	0.52	0.55	5	1	3.3×10^{-14}	20	3.5	8	TO18
X65EB	1	1 x 1 mm	0.52	0.55	5	1	3.3×10^{-14}	20	3.5	3.5	1B

Highlighted items are Centronic standard products generally available from stock