
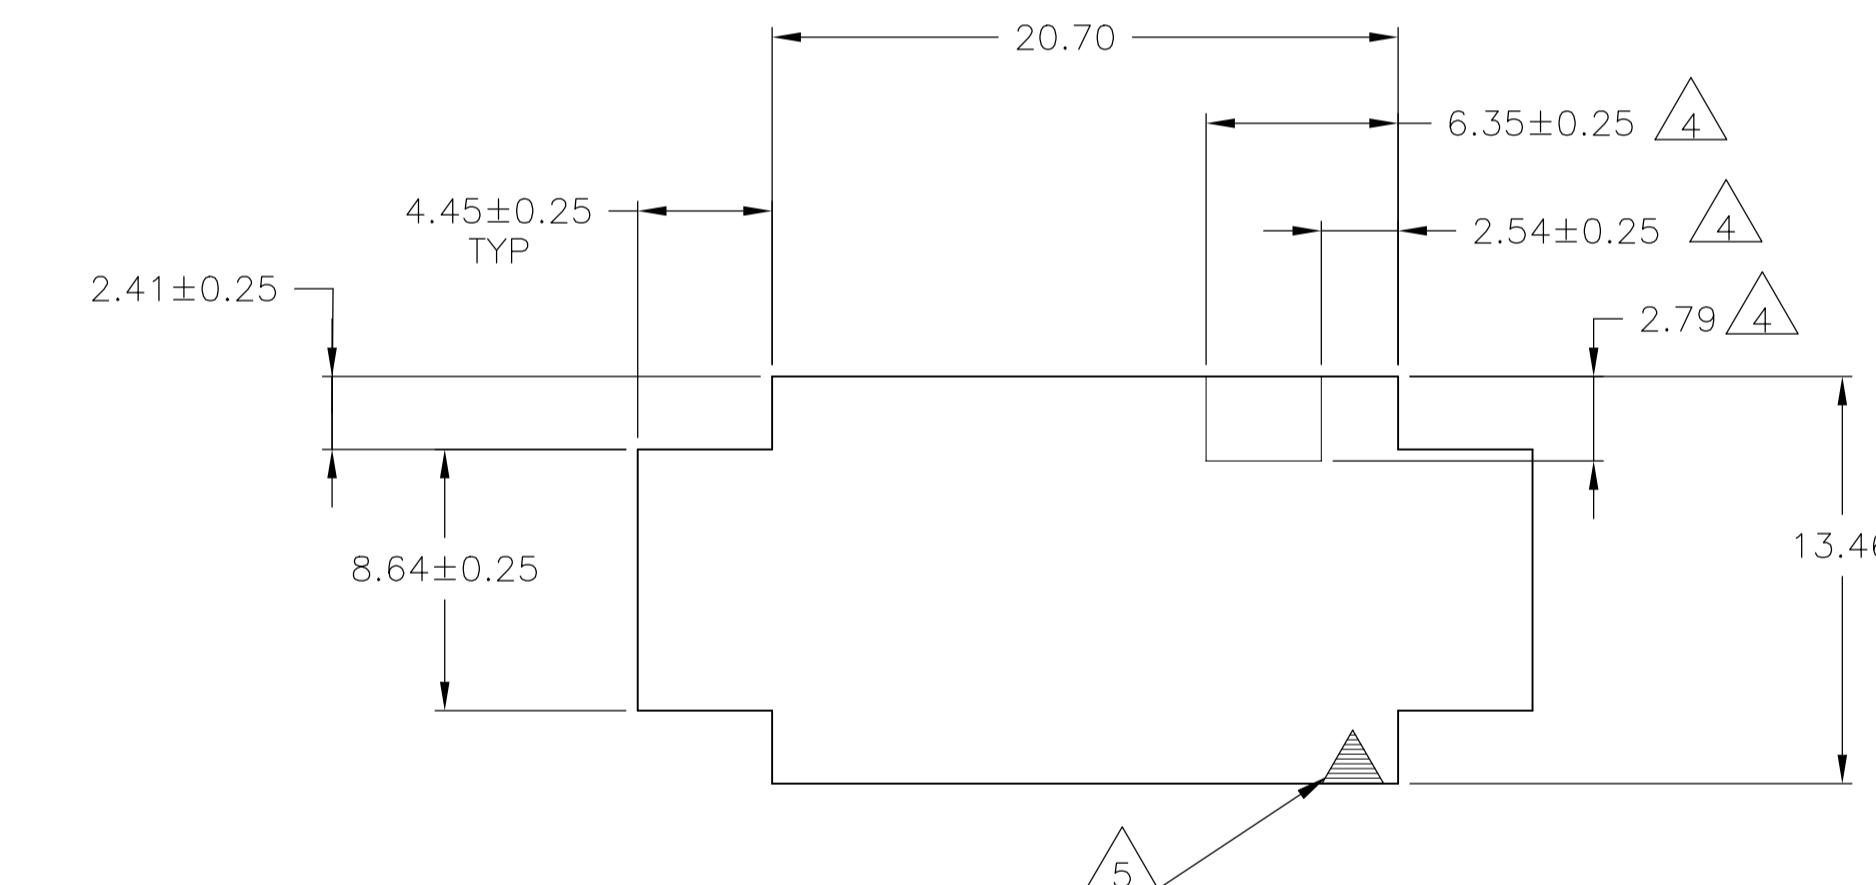
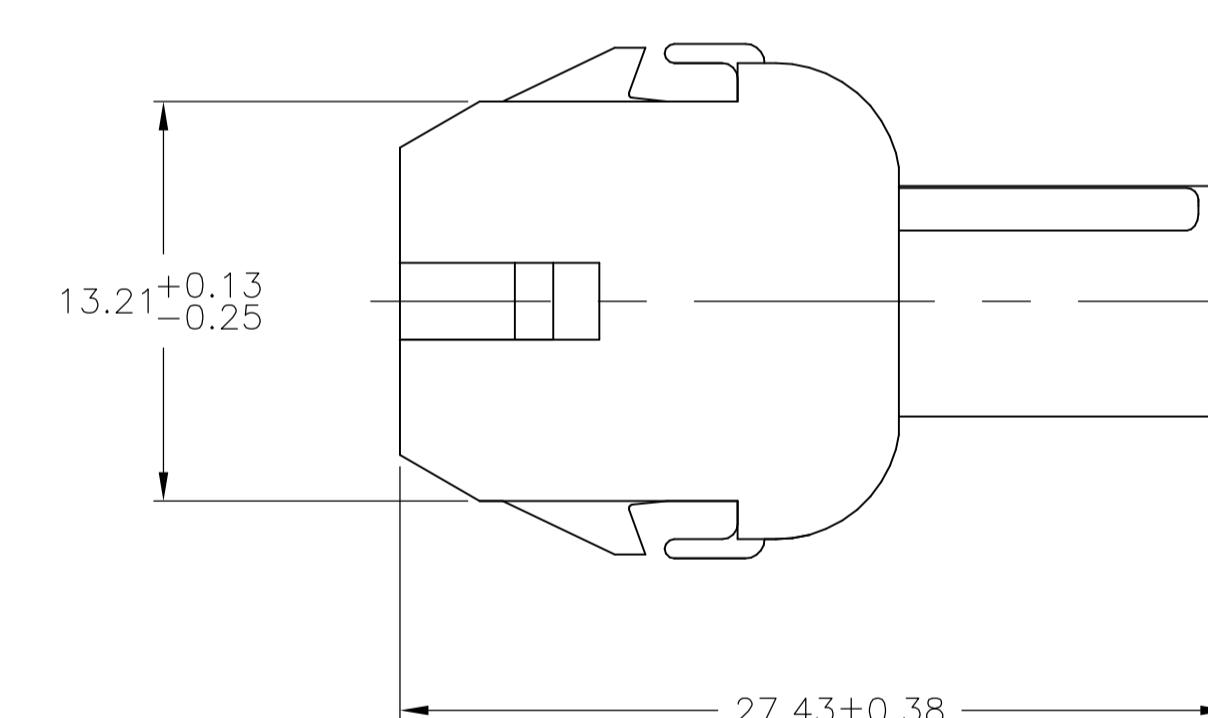
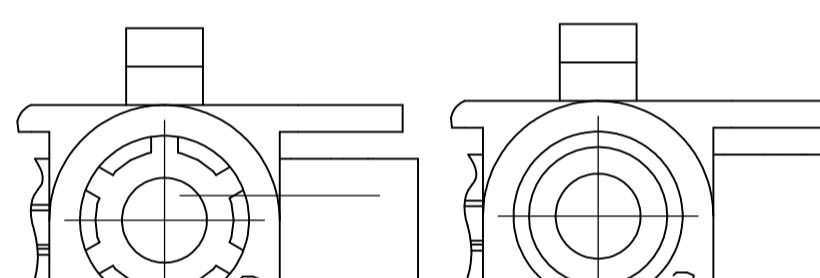


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
9. MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GLOW WIRE TEST 750° C WITHOUT FLAME)
10. PRELIMINARY PART NOT RELEASED FOR PRODUCTION.

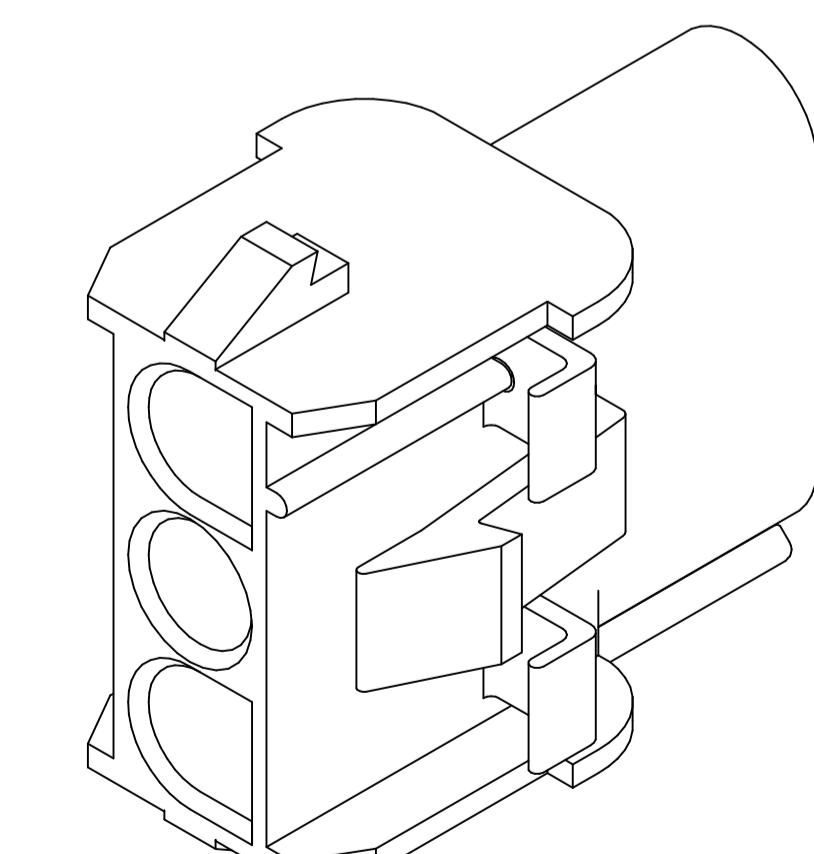

RECOMMENDED PANEL CUT OUT

3-DIMENSIONAL MODEL  
NTS

4.45	.175	27.43	1.080
2.79	.110	20.70	.815
2.54	.100	20.32	.800
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.		24JUN2013	TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	24JUN2013	
0 PLC	± -	R.P.	24JUN2013	NAME
1 PLC	± -	PRODUCT SPEC	CAP,3 CIRCUIT, UNIVERSAL MATE-N-LOK™	
2 PLC	± 0.13	APPLICATION SPEC	-	
3 PLC	± -	SIZE	-	
4 PLC	± -	CAGE CODE	A1 00779 C=2178474	
MM	IN	DRAWING NO.	-	
SEE TABLE		RESTRICTED TO	-	
FINISH	-	WEIGHT	A1 00779 C=2178474	
MATERIAL		CUSTOMER DRAWING	-	
4805 (1/15)		SCALE	4:1	
		1 OF	1	
		REV	A2	