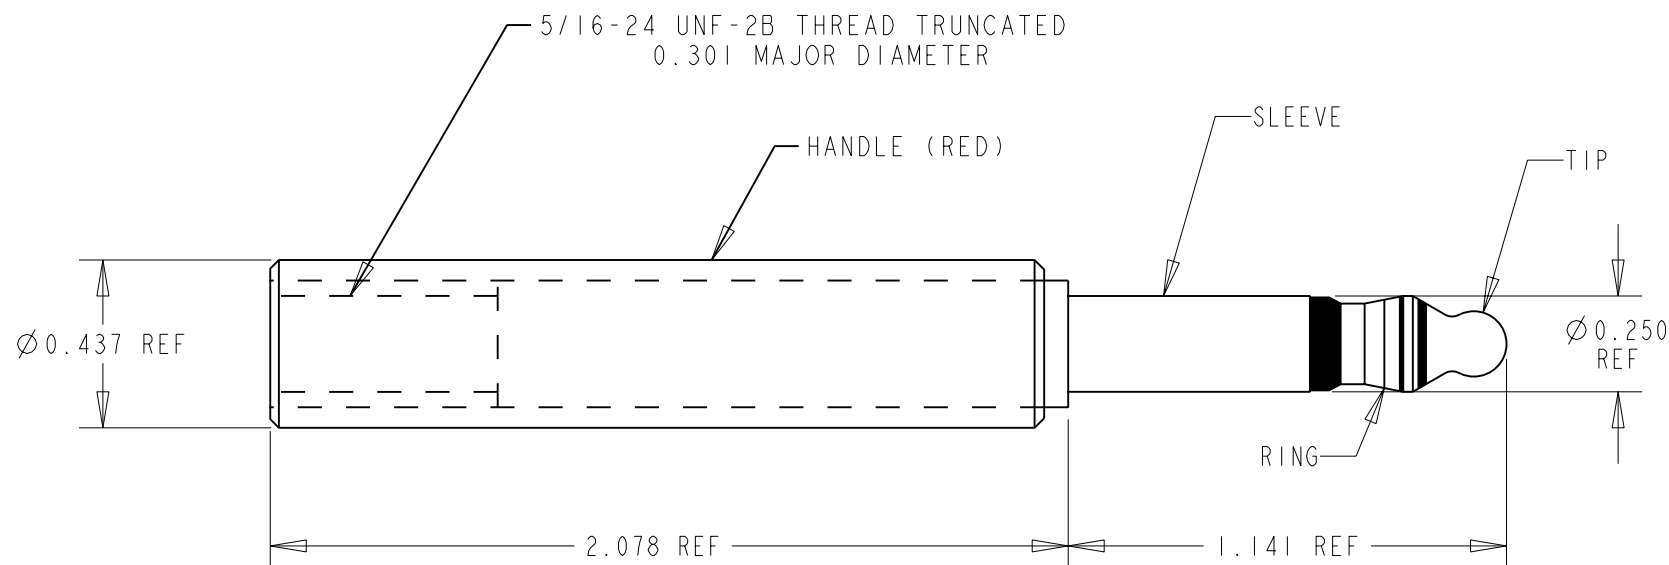


SPECIFICATIONS:

TIP ROD, RING & SLEEVE - BRASS

SCREWS - BRASS

TERMINALS - BRASS, HOT TINNED

INSULATION - POLYESTER, GLASS FILLED UL94V-0

CUSTOMER DRAWING

CAD/CAM DWG. NO.

482_CD

SHEET 1 OF 1

★ STAR SYMBOL DENOTES CRITICAL DIMENSION,
SEE S/C ENGINEERING STANDARD ES-0001THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED
BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSE ONLY.

UNLESS OTHERWISE SPECIFIED

SIZE WIDTH MULT LBS./M TEMPER

1. ALL DIMENSIONS IN INCHES
2. DECIMAL DIMENSIONS $\pm .005$
3. ANGLES $\pm 1/2^\circ$
4. ALL DIA'S CONCENTRIC WITHIN .005 T.I.R.
5. REMOVE ALL BURRS
6. MAKE NO DIMENSIONAL ALLOWANCES FOR APPLIED FINISHES, I.E., PLATING, PAINTING, ETC.
7. HOLES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN $\pm .002$

FINISH

MATERIAL

SPEC. NO.

SPEC. NO.

FIRST USED ON

SCALE
1:0.50

Switchcraft®

DATE DRAWN

BY

CHK'D

APP'D

1-6-65

RM

WH
1-7-65DLV
12-8-87

NAME

PART NO.

ISSUE

LITTEL PLUG

482

C

REVISIONS

DO NOT SCALE DRAWING

