


THREE PORT CONNECTOR BLOCK SHOWN WITH PLASTIC CLOSURE PLUGS REMOVED.

SEE TABLE FOR DIMENSIONS OF PARTS

WITH ADDITIONAL PORTS

"N" PLCS

.35

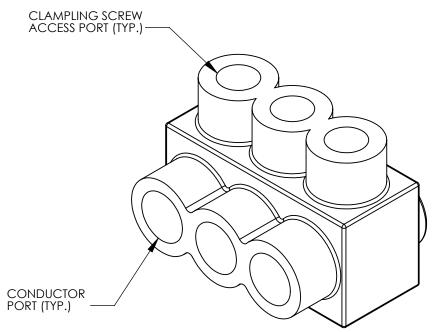

=====

1.25

PANDUIT FINISHED GOODS PIN	CONDUCTOR RANGE	HEX KEY	SCREW QTY.	CAP (SCREW PORT) QTY.	CAP (WIRE PORT) QTY.	Α	L	N	TIG HTEN IN G TORQUE
PCSB2/0-2S-6	# 2/0 - # 14 STR # 10 - # 14 SOL	3 / 16	2	2	2	1.52	1.2 6 5	2	12 0 inflb
PCSB2/0-3S-6Y		3 / 16	3	3	3	2 .19	1.9 3 7	3	
PCSB210-4S-6Y		3 / 16	4	4	4	2.86	2.609	4	
PCSB2f0-5S-4 Y		3 / 16	5	5	5	3.53	3 .2 8 1	5	
PCSB210-6S-4Y		3 / 16	6	6	6	4 .2 0	3.953	6	
PCSB2#0-8S-3Y		3 / 16	8	8	8	5.55	5.297	8	
PCSB2#0-10S-2Y		3 / 16	10	10	2 0	6.89	6.641	10	
PCSB2/0-12S-1Y		3 / 16	12	12	2 4	8 .2 4	7.985	12	
PCSB2#0-14S-1Y		3 / 16	14	14	2 8	9.58	9.329	14	





- 1. UL486A-UL486B LISTED, DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
- 2. SEE TABLE FOR WIRE RANGE.
- 3. STRIP LENGTH: .63 +.06/-0
- 4. FOR TIGHTENING TORQUE SEE TABLE
- 5. VOLTAGE RATING: 600 V. MAX. BUILDING WIRE, 1000 V. MAX. IN SIGNS & FIXTURES.
- 6. TEMPERATURE RATING: 90 °C (CU9AL).
- 7. CONNECTOR BLOCK BODY ARE MADE FROM ALUMINUM. CONDUCTOR PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
- 8. CONNECTOR TO INCLUDE TIN PLATED ALUMINUM CLAMPING SCREWS FOR EACH CONDUCTOR PORT.
- 9. INSULATION MATERIAL IS CLEAR PVC.
- 10. CLAMPING SCREW ACCESS PORTS AND ALL WIRE ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
- 11. ALL DIMENSIONS SHOWN ARE NOMINAL.
- 12 ONLY ONE CONDUCTOR PER PORT ALLOWED.
- 13 PACKAGE QTY: -12 = 12 PCS.
 - -6 = 6 PCS.-4 = 4 PCS.
 - -3 = 3 PCS.

