


ALL RIGHTS RESERVED. NO PORTION OF THIS PUBLICATION, WHETHER IN WHOLE OR IN PART CAN BE REPRODUCED WITHOUT THE EXPRESS WRITTEN CONSENT OF SPC TECHNOLOGY.

REVISIONS			DOC. NO. SPC-F005 * Effective: 12/21/98 * DCP No: 480					
DCP #	REV	DESCRIPTION	DRAWN	DATE	CHECKD	DATE	APPRVD	DATE
1116	C	Drawing Was CRS-TV-***	JWM	6/11/01	JC	6/20/01	JC	6/20/01
1199	D	Redrawn & Bulk Items added	JWM	4/11/02	JC	4/11/02	JC	4/11/02

Notes:

Material: Electro-tin plated Copper
Insulating Material: Vinyl (PVC) UL94V-0
Voltage Rating: 600V
Operating Temp: -40°F to 221°F (-40°C ~ 105°C)

SPC Type No.	Package Qty.	Wire Range (AWG)	Stud Size	W	C	L	E	Thickness	"T" Barrel I.D.	"W" Max. Insulator Diameter	Color
CRS-TV-1006	50	12 ~ 10	6	.28	.29	.98	.84	.040	.135	.250	Yellow
SPC3763	500		8	.28	.29	.98					
CRS-TV-1008	50		10	.38	.29	1.03					
SPC3764	500		1/4	.53	.44	1.26					
CRS-TV-1010	50	16 ~ 14	1/4	.53	.44	1.26	.99	.030	.090	0.147	Blue
SPC3765	500		8	.33	.29	.90					
CRS-TV-1025	50		10	.47	.40	1.08					
SPC3766	500		1/4	.68	.67	.74					
CRS-TV-1031	500	22 ~ 18	5/16	.44	1.26	.99	.085	.030	.070	0.145	Red
SPC3767	500		3/8	.54	.40	1.08					
CRS-TV-1037	50		6	.25	.22	.80					
CRS-TV-1406	100		10	.33	.29	.90					
SPC3760	1000	16 ~ 14	6	.25	.22	.80	.78	.030	.090	0.147	Blue
CRS-TV-1406-S	100		8	.31	.33	.93					
CRS-TV-1408	100		10	.47	.40	1.08					
SPC3761	1000		1/4	.68	.67	.74					
CRS-TV-1408-S	100	22 ~ 18	5/16	.44	1.26	.99	.085	.030	.070	0.145	Red
CRS-TV-1410	100		3/8	.54	.40	1.08					
SPC3899	1000		6	.25	.22	.80					
CRS-TV-1410-S	100		8	.31	.33	.93					
CRS-TV-1425	100	16 ~ 14	10	.47	.40	1.08	.78	.030	.090	0.147	Blue
SPC3762	1000		6	.25	.22	.80					
CRS-TV-1802	100		8	.31	.33	.93					
CRS-TV-1804	100		10	.47	.40	1.08					
SPC3755	1000	22 ~ 18	1/4	.68	.67	.74	.085	.030	.070	0.145	Red
CRS-TV-1806	100		3/8	.54	.40	1.08					
SPC3756	1000		6	.25	.22	.80					
CRS-TV-1808	100		8	.31	.33	.93					
SPC3757	1000	16 ~ 14	10	.47	.40	1.08	.78	.030	.090	0.147	Blue
CRS-TV-1810	100		6	.25	.22	.80					
SPC3758	1000		8	.31	.33	.93					
CRS-TV-1825	100		10	.47	.40	1.08					
SPC3759	1000	22 ~ 18	1/4	.68	.67	.74	.085	.030	.070	0.145	Red
CRS-TV-1825	100		3/8	.54	.40	1.08					
SPC3759	1000		6	.25	.22	.80					
CRS-TV-1825	100		8	.31	.33	.93					

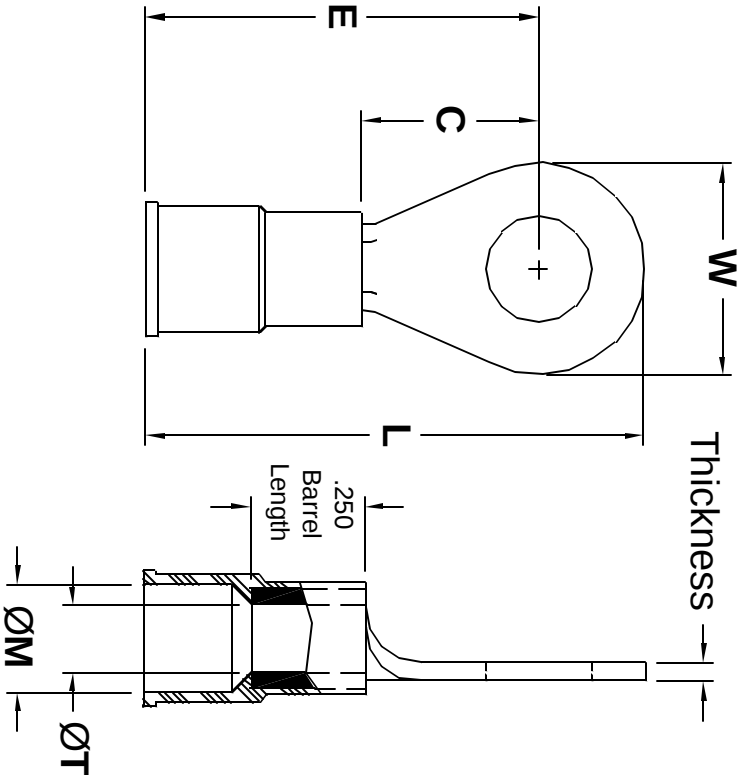

SPC TECHNOLOGY

DRAWING TITLE:

Vinyl Insulated Butted Seam Ring Tongue Terminals

SIZE DWG. NO.

A TA-352

ELECTRONIC FILE

TA-352.dwg

REV

D

SCALE: NTS

U.O.M.: INCHES [mm]

SHEET: 1 OF 1



ES8918



LR22190M6

SPC-F005.DWG