


## IM - B Relay

- Minimum board-space 60mm<sup>2</sup>
- Slim line 10x6mm (0.39x0.24") and low profile 5.65mm (0.222")
- Switching power 60W/62.5VA
- Switching voltage 220VDC/250VAC
- Switching current 2A
- Bifurcated contacts
- High mechanical shock resistance



IM\_AB

## Typical applications

Telecommunication, access and transmission equipment, optical network terminals, modems, office and business equipment, consumer electronics, measurement and Test equipment, industrial control, medical equipment



## Approvals

UL 508 File No. E 111441

Technical data of approved types on request


## Contact Data

Contact arrangement	1 form A (1 NO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current	2A
Switching power	60W, 62.5VA
Contact material	PdRu Au covered
Contact style	twin contacts
Minimum switching voltage	100µV
Initial contact resistance	<100mΩ at 10mA/30mV
Thermoelectric potential	<10µV
Operate time	typ. 1ms, max. 3ms
Release time	without diode in parallel typ. 1ms, max. 3ms with diode in parallel typ. 3ms, max. 5ms
Bounce time max.	typ. 1ms, max. 5ms
Electrical endurance	at contact application 0 (≤ 30mV / ≤ 10mA) cable load open end resistive, 125VDC / 0.24A - 30W resistive, 220 VDC / 0.27A - 60W resistive, 250VAC / 0.25A - 62.5VA resistive, 30VDC / 1A - 30W resistive, 30VDC / 2A - 60W
	min. 2.5x10 <sup>6</sup> operations min. 2.0x10 <sup>6</sup> operations min. 5x10 <sup>5</sup> operations min. 1x10 <sup>5</sup> operations min. 1x10 <sup>5</sup> operations min. 5x10 <sup>5</sup> operations min. 1x10 <sup>5</sup> operations

## Contact data (continued)

UL contact rating 30VDC, 2A, 60W, NO only

## Max. DC load breaking capacity

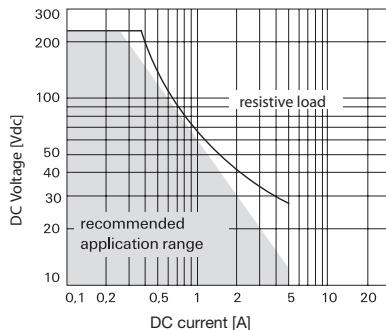

110VDC, 0.3A, 33W
220VDC, 0.27A, 60W
125VAC, 0.5A, 62.5W
250VAC, 0.25A, 62.5W

 Mechanical endurance 10<sup>8</sup> operations

## Coil Data

Magnetic system	monostable, bistable
Coil voltage range	1.5 to 24VDC
Max. coil temperature	125°C
Thermal resistance	<150K/W

## Coil versions, standard version, monostable, 1 coil


Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
01	3.0	2.25	0.30	64	140
02	4.5	3.38	0.45	145	140
03	5.0	3.75	0.50	178	140
06	12.0	9.00	1.20	1029	140

All figures are given for coil without pre-energization, at ambient temperature +23°C

## Insulation

C\*

## Coil operating range

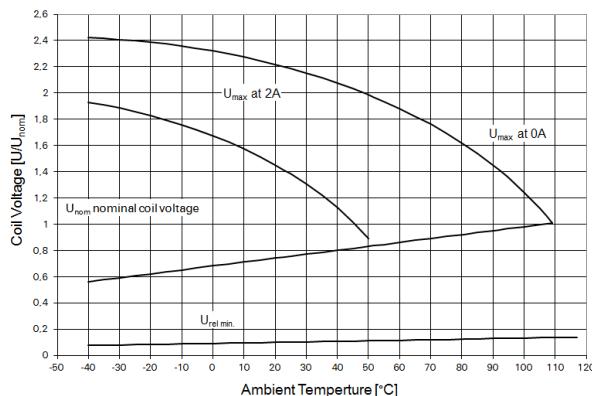

high

**IM - B Relay (Continued)**

dielectric version	
Initial dielectric strength	
between open contacts	2500Vrms
between contact and coil	3500Vrms
Initial surge withstand voltage	
between open contacts	3500V
between contact and coil	4900V
Initial insulation resistance	
between insulated elements	>10 <sup>9</sup> Ω
Capacitance	
between open contacts	max. 1pF
between contact and coil	max. 2pF
between adjacent contacts	max. 2pF

\*this relay contains SF6 (Sulfur hexafluoride, CAS number: 2551-62-4) for dielectric strength enhancement, SF6 is hermetically sealed in relay without leaks to air during normal application as recommended per the applicable product specification. It is clarified that the usage of SF6 in mini signal relay is not prohibited by related regulations. Please contact TE local sales or field engineer for further information and detailed material declaration.

**RF Data**

Isolation at 100MHz/900MHz	37.0dB/18.8dB
Insertion loss at 100MHz/900MHz	0.03dB/0.33dB
Voltage standing wave ratio (VSWR) at 100MHz/900MHz	1.06/1.49


**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customersupport/rohssupportcenter">www.te.com/customersupport/rohssupportcenter</a>	
Ambient temperature	-40°C to +85°C
Thermal resistance	< 150K/W
Category of environmental protection	IEC 61810
Degree of protection	RT V - hermetically sealed
IEC 60529	IP 67, immersion cleanable
Vibration resistance (functional)	20g, 10 to 500Hz
Shock resistance (functional), half sinus 11ms	50g
Shock resistance (destructive), half sinus 0.5ms	500g
Weight	max. 0.75g
Resistance to soldering heat THT	
IEC 60068-2-20	265°C/10s
Resistance to soldering heat SMT	
IEC 60068-2-58	265°C/10s
Moisture sensitive level, JEDEC J-Std-020D	MSL3
Ultrasonic cleaning	not recommended
Packaging/unit	
THT version	tube/50pcs., box/1000 pcs.
SMT version	reel/1000 pcs., box/1000 or 5000 pcs.


**Terminal assignment**

TOP view on relay


IM-B, 1 form A (NO)




Contacts are shown in reset condition. Contact position might change during transportation and must be reset before use.


**Dimensions**
**THT version**

Standard version

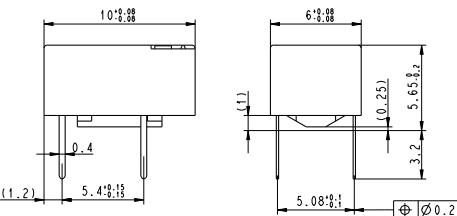

**SMT version**

Gull wings

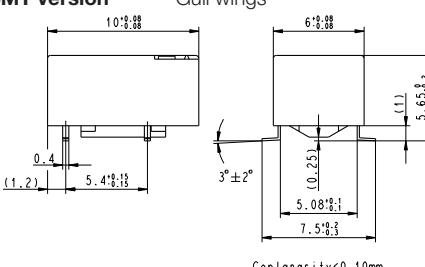

**PCB layout**

TOP view on component side of PCB

THT mounting holes




SMT - solder pads

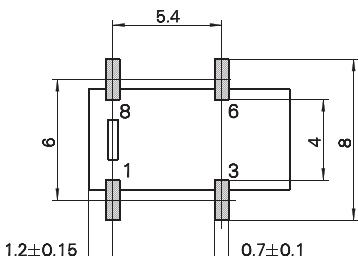


**IM - B Relay (Continued)**
**Processing** Recommended soldering conditions

Soldering conditions according IEC 60058-2-58 and  
IPC/JEDEC J-STD-020D

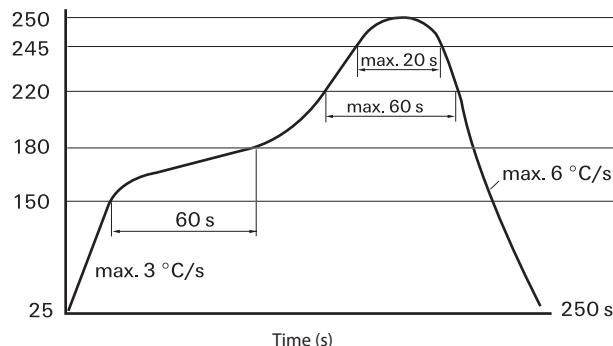


Resistance to soldering heat - Reflow profile

Infrared Soldering: temperature/time profile (lead and housing peak temperature)

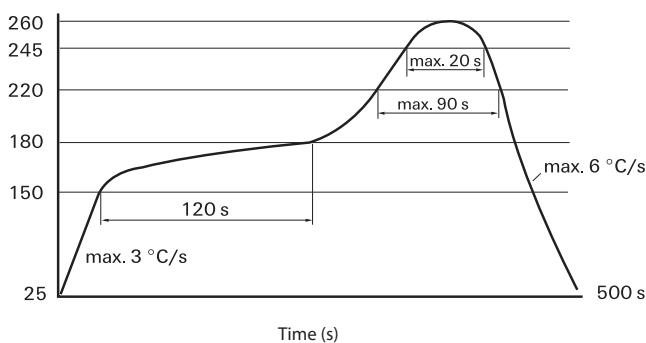



Recommended reflow soldering profile

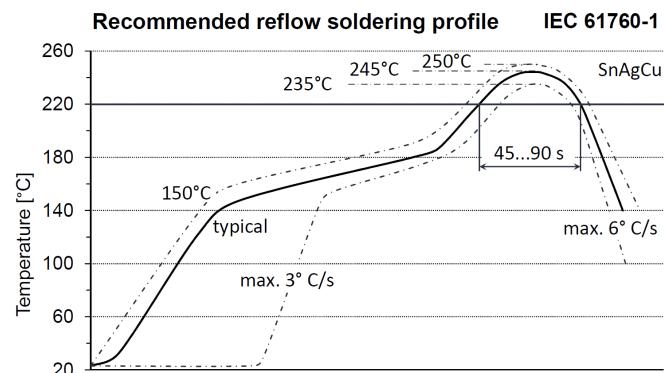




Vapor Phase Soldering:  
temperature/time profile (lead and housing peak temperature)

**Packing**

Tube for THT version  
50 relays per tube, 1000 relays per box

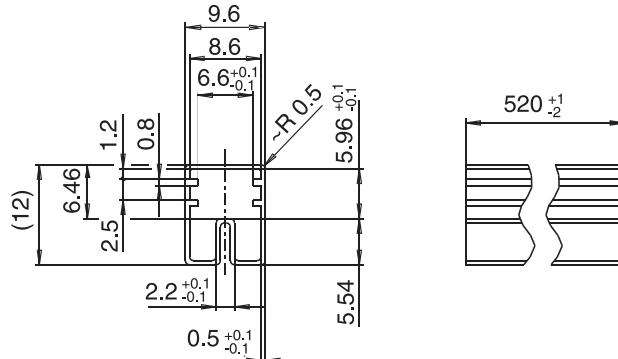

Tape and reel for SMT version  
1000 relays per reel, 1000 or 5000 relays per box

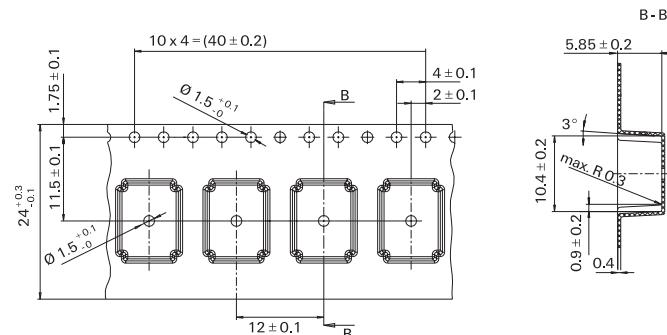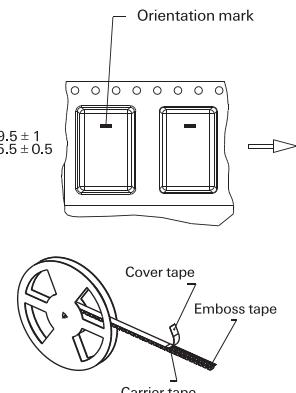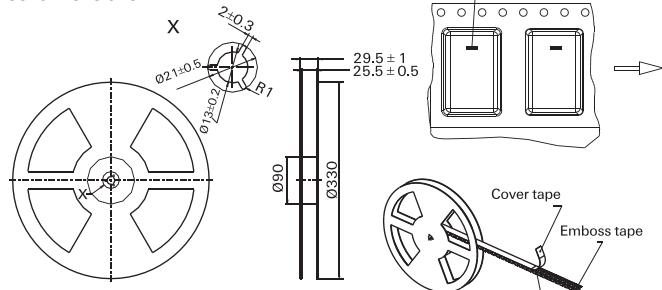
**Reel dimensions**


## IM - B Relay (Continued)

<b>Product code structure</b>	Typical product code	IM	B	03	G	R
<b>Type</b>	IM	Signal Relays IM Series IMA/IMB				
<b>Contact arrangement</b>	B	1 form A, 1 NO				
<b>Coil</b>	Coil code: please refer to coil versions table					
<b>Performance type</b>	Blank	Standard version	C	High Dielectric Version		
<b>Terminals</b>	T	THT - standard	G	SMT-gull wing		
<b>Packing</b>	S	Tube	R	Reel		

Product code	Arrangement	Perf. type	Coil	Coil type	Terminals	Part number
IMB01CGR	1 form A,	High dielectric	3VDC	Monostable	SMT gull wing	1462041-1
IMB01CTS	1 NO				THT standard	1462041-4
IMB02CGR	contact		4.5VDC		SMT gull wing	1462041-2
IMB02CTS					THT standard	1462041-5
IMB03CGR			5VDC		SMT gull wing	1462041-7
IMB03CTS					THT standard	1462041-8
IMB04CGR			6VDC		SMT gull wing	1462041-9
IMB06CGR			12VDC			1462041-3
IMB06CTS					THT standard	1462041-6
IMB07CGR			24VDC		SMT gull wing	1-1462041-3
IMB07CTS					THT standard	1-1462041-4
IMB42CGR			4.5VDC	Bistable	SMT gull wing	1-1462041-6
IMB42CTS					THT standard	1-1462041-5