



Feb.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

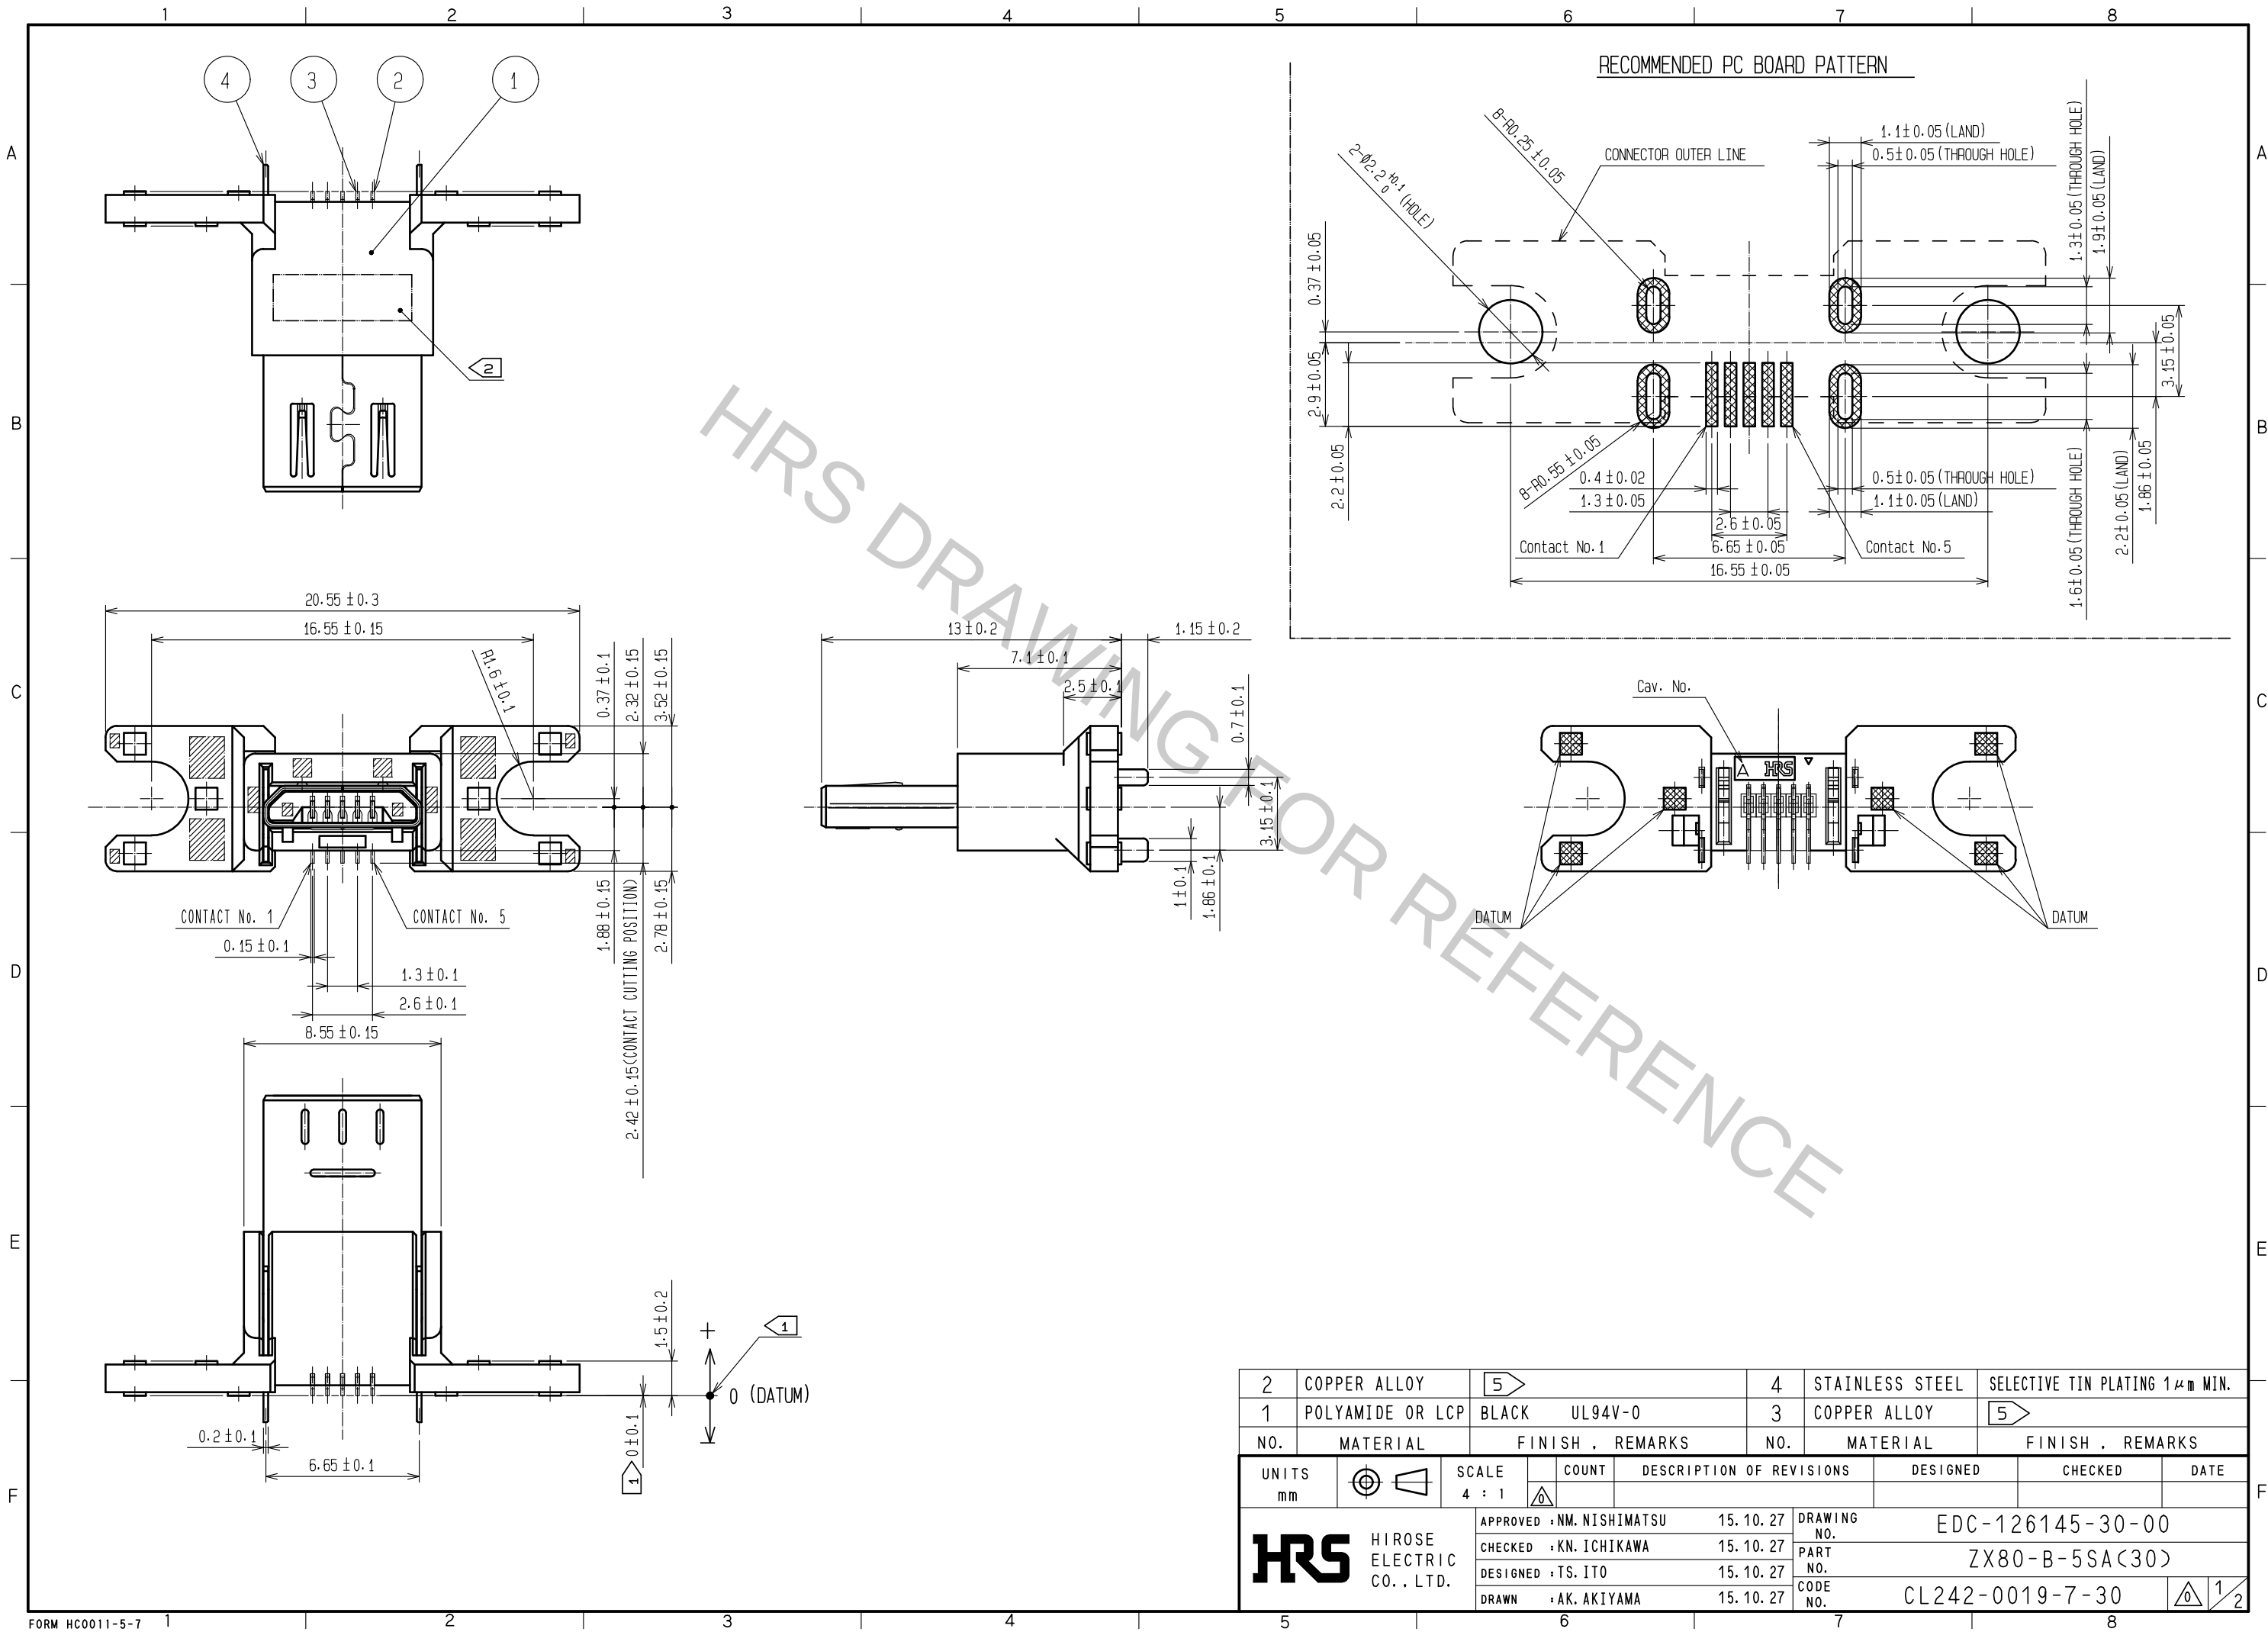


2	COPPER ALLOY	5		4	STAINLESS STEEL	SELECTIVE TIN PLATING 1μm MIN.			
1	POLYAMIDE OR LCP	BLACK UL94V-0		3	COPPER ALLOY	5			
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRSHIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU		15.10.27	DRAWING NO.	EDC-126145-30-00			
		CHECKED : KN. ICHIKAWA		15.10.27	PART NO.	ZX80-B-5SA(30)			
		DESIGNED : TS. ITO		15.10.27	CODE NO.	CL242-0019-7-30			
		DRAWN : AK. AKIYAMA		15.10.27			1	2	

3 FIG-2 DRAWING FOR PACKING(AT 2000 pcs PACKING.)
THIS IS ONE EXAMPLE OF PACKING METHOD, AND IT MAY CHANGE WITHOUT
ANY NOTICE, DEPENDING ON VOLUME.

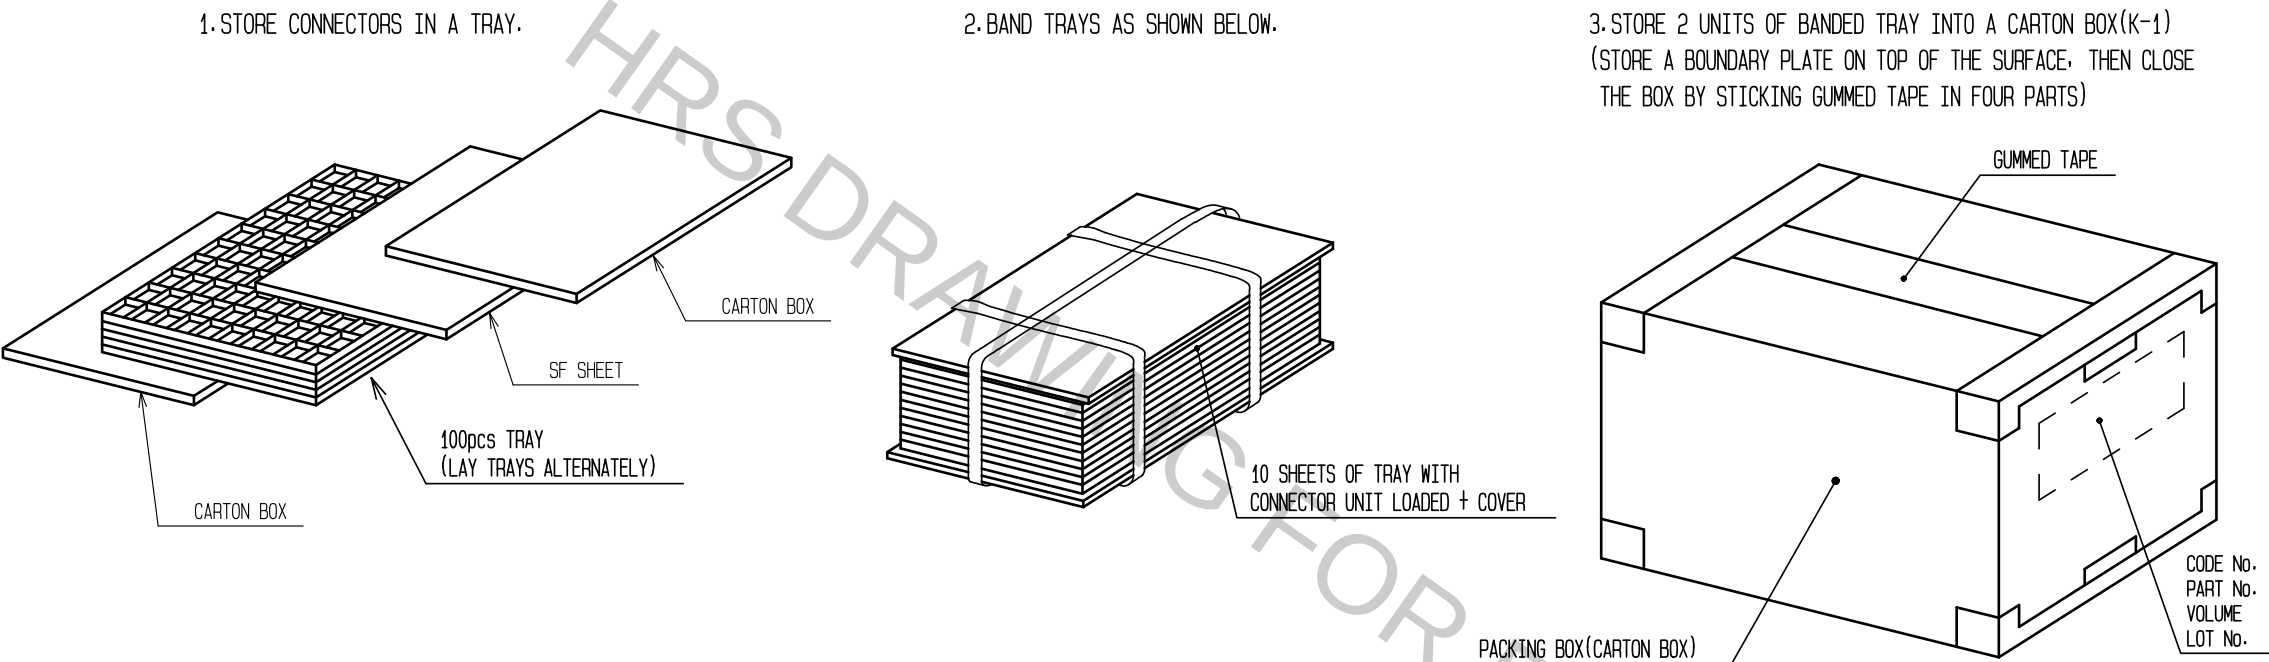

NOTES. 1 DIMENSIONS OF SMT RANGE AND CO-PLANARITY ARE AS SHOWN BEROW.

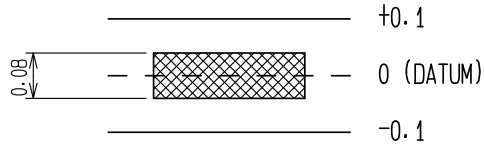

- 2 LOT No. SHALL BE INDICATED AT THE POSITION AS SHOWN.
- 3 THIS PRODUCT IS TRAY PACKING, AND 100 CONNECTORS FOR EACH TRAY.
MINIMUM ORDER QUANTITY WILL BE 100 pcs PER UNIT.
- 4 THE SHADED AREAS SHOW LOCATIONS OF EJECTOR PINS.
- 5 PLATING
CONTACT AREA : GOLD 0.75μm MIN.
READ AREA : GOLD 0.03μm MIN.
UNDER PLATING: NICKEL 2μm MIN.

HRS	DRAWING NO.	EDC-126145-30-00
	PART NO.	ZX80-B-5SA(30)
	CODE NO.	CL242-0019-7-30
		2/2