



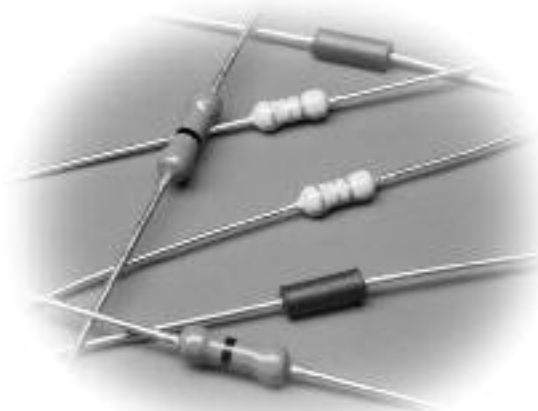

features

- Type Z are conformal coated
- Type J are molded
- Suitable for automatic machine insertion
- Size compatible with 1/8, 1/4 and 1/2 watt resistors
- Marking: Type Z are tan color, single black band identifier
Type J are black, no marking
- Products with lead-free terminations meet EU RoHS and China RoHS requirements

dimensions and construction

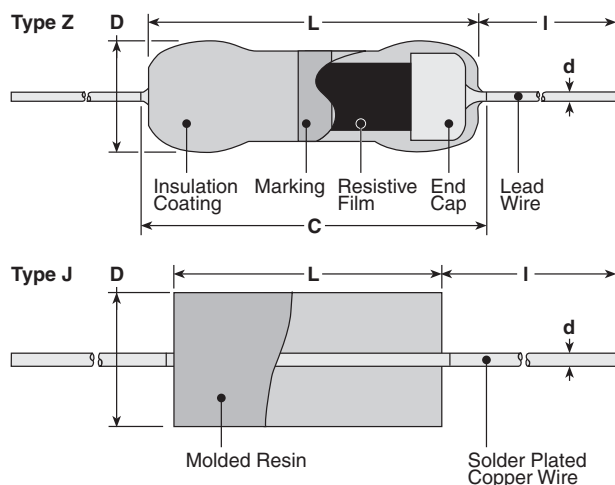

Type	Dimensions inches (mm)				I'	
	L (ref.) ¹	C (max.)	D	d (nom.)	Standard	Long
Z16	.126±.008 (3.2±0.2)	.134 (3.4)	.067 ^{+.008} _{-.004} (1.7 ^{+.0.2} _{-.0.1})	.018 (0.45)	.551 Min. ² (14.0 Min.)	.787 Min. ³ (20.0 Min.)
Z25	.240±.02 (6.1±0.5)	.280 (7.1)	.091±.012 (2.3±0.3)	.024 (0.6)	1.18±.118 (30.0±3.0)	—
Z25Y	.228 (5.8)		.087±.004 (2.2±0.1)			
J1/6Z	.134 ^{+.004} _{-.008} (3.4 ^{+.0.1} _{-.0.2})	—	.067±.008 (1.7±0.2)	.020 (0.5)		
J1/4Z	.256±.02 (6.5±0.5)	—	.091 ⁺⁰ _{-.012} (2.3 ⁺⁰ _{-.0.3})	.024 (0.6)		

¹ Lead length changes depending on taping and forming type.

² Forming code S is applied for bulk type.

³ Long type is custom-made.

ordering information

New Part #	Z16	C	T52	A
Type	Z16 Z25 Z25Y J1/4Z J1/6Z	Termination Material C: SnCu	Taping and Forming T26, T52	Packaging A: Ammo R: Reel


For further information on packaging,
please refer to Appendix C.

applications and ratings

Part Designation	Maximum Amperage	Minimum Dielectric Withstanding Voltage	Resistance	Rated Ambient Temperature	Operating Temperature Range
Z16	1.5A	300V	20mΩ or less	+70°C	-55°C to +155°C
Z25	2.5A	500V			
Z25Y	15A	500V	20mΩ or less		
J1/6Z	8A	—	10mΩ Max.		-55°C to +125°C
J1/4Z	10A	—			

environmental applications

Derating Curve

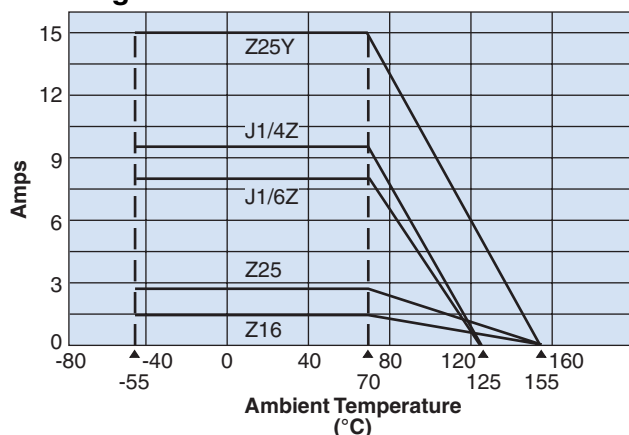

For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

Performance Characteristics

Parameter	Requirement	Test Method JIS C5201-1
Resistance	Less than 20mΩ	Measuring points are 10mm ± 1mm from the end cap
Resistance to Solder Heat		Terminal except 3mm shall be immersed in the solder, 350°C ± 5°C, 3.5 seconds ± 0.5 second
Solderability	90% coverage minimum	235°C ± 5°C, 2 seconds ± 0.5 second
Terminal Strength	No mechanical damages	(Direct Load) Z16: 5N, 30 seconds, Z25: 10N, 30 seconds (Twist Test) 360°, 5 times (Bending Test) 5N, 90°, 2 times (Z16: 2.5N)
Rapid Change of Temperature	Less than 20mΩ	-55°C (30 minutes)/+85°C (30 minutes), 5 cycles
Moisture Resistance		40°C ± 2°C, 90-95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Endurance @ 70°C		70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle
Solvent Resistance	No visible damages to protective coating and marking	Isopropyl alcohol with ultrasonic cleansing for 2 minutes Power: 0.3W/cm², f: 28kHz, Temperature: 35°C ± 5°C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[KOA Speer:](#)

[Z16L](#) [JL8LT52R](#) [Z25LT52R](#) [J1/4ZCT52R](#) [J1/4ZLT52R](#) [J1/6ZCT52R](#) [Z16CT52R](#) [Z16LMTR](#) [Z16LT52R](#)
[Z25CT52R](#) [Z25YC](#) [Z25YCT52R](#) [Z25YL](#) [Z25YLVTPR](#) [Z25YLT52R](#)